



Mounting instruction

Sliding dampers

SKMTR



SKPTR





Sliding dampers

SKMTR, SKPTR


Assembly

Install the damper as per instructions for straps or flanges.

Check that the space before/beyond the damper allows the damper blade to be fully opened.

When installing SKPTR with automatic opening and closing function, the risk of personal injury must be considered. The damper must therefore be installed outside any possible contact zone, for example min. 2.1 m above the floor.

Connecting conduits must be suspended so that the damper is not exposed to destructive forces. These can cause the damper to jam or stick.

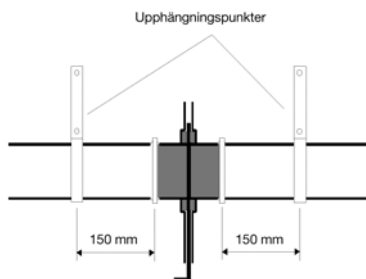


Example of horizontal installation.

Electrical connection

Electrical connection must not be performed before the damper is connected to the pipe system or the pipe connections are covered in some other way.

Electricity must be connected by a qualified electrician. Connection must be carried out in accordance with the adjoining diagram.

The motor must, however, be preceded by a multi-pin switch with a break distance of at least 3 mm.



Wiring diagram



Sliding dampers

SKMTR, SKPTR

Example of control for automatic damper

Electrical signal to solenoid valve


The solenoid valve on the damper is connected to 230 V or 24 V from the governing process (e.g. a processing machine).

Connection:

- Compressed air 5-8 bar is connected by a 6 mm compressed air hose to the solenoid valve.
- The solenoid valve is connected to the required voltage.

Options:

If the supply voltage from processing machines is 400 V, you must use an EMI-04 transformer in order to be able to connect the solenoid valve on the damper to the machine. EMI-04 is connected to 400 V and supplies 24 V AC to the solenoid valve.




Control signal from light sensor

In light sensor EMI-02, a circuit is closed when the sensor is activated by the beam from an arc. Via control unit EMI-01 the solenoid valve is supplied with 230 V when the sensor is activated. The control unit contains a potentiometer where damper closing can be delayed by 30 seconds.

Connection:

- Compressed air 5-8 bar is connected by a 6 mm compressed air hose to the solenoid valve.
- The control unit is connected to 230 V and the solenoid valve (230 V) on the damper is connected to the control unit.
- The light sensor that must be installed close to the light source is connected to the control unit.





Sliding dampers


SKMTR, SKPTR

Control signal from current sensor

In a current sensor EMI-03 a circuit is closed when the sensor is activated by a suitable electric current. Via control unit EMI-01 the solenoid valve is supplied with 230 V when the sensor is activated. The control unit contains a potentiometer where damper closing can be delayed by up to 30 seconds.

Connection:

- Compressed air 5-8 bar is connected by a 6 mm compressed air hose to the solenoid valve.
- The control unit is connected to 230 V and the solenoid valve (230 V) on the damper is connected to the control unit.
- The current sensor that is to be installed on the power cable to the governing machine is connected to the control unit.



Commissioning

Check that the damper blade moves easily (must be performed after mechanical installation).

Check that the damper opens and closes as per projected function.

Maintenance

The damper is maintenance free. If necessary, cleaning can carefully be performed.

Spare parts

When ordering spare parts, state damper designation and size. See product plate on damper.

Designation	Description
T-08	Microswitch
T-12	Microswitch socket
T-901	Damper blade
T-902	Sealing kit
T-920	Damper blade protection

Troubleshooting

Damper blade jams or sticks.


1. The damper needs to be cleaned
2. Breaking forces are affecting the pipe system
3. The blade is damaged
4. Sealing is loose



Sliding dampers

SKMTR, SKPTR

Structure of the automatic damper

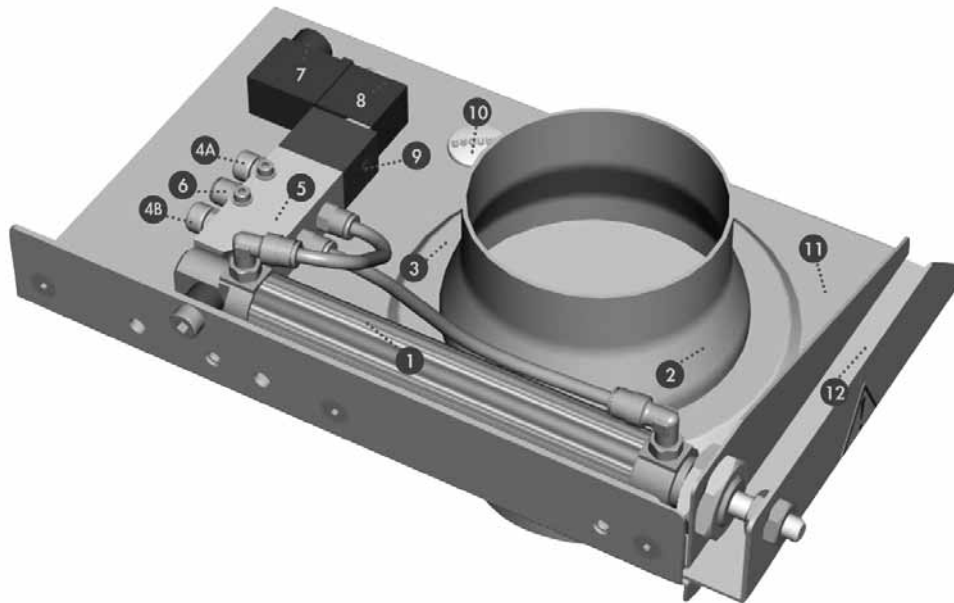

RK design

- | | | |
|--------------------|--|------------------------------------|
| 1. Cylinder | 5. Solenoid valve | 10. Socket for microswitch |
| 2. Connection | 6. Compressed air supply (6 mm) | 11. Damper housing |
| 3. Sealing housing | 7. Cable contact | 12. Damper blade |
| 4. Throttle valves | 8. Solenoid | 13. Damper blade protection (SPZZ) |
| A. Closing | 9. Screw for manual operation of valve | |
| B. Opening | | |



FM design with damper blade protection (SPZZ)

