



Mechanical Systems 2021/22



Content

Our products	3
Solutions for various types of applications	4

CO₂

Rack units

QuietCO ₂ OL™ Multi-Compressors Indoor	6
MiniCO ₂ OL® Compact	7
MaxiCO ₂ OL® Compact	8
CO ₂ OLtec®Evo	9
PowerCO ₂ OL™	10
FlexiCO ₂ OL®	11
CombiCO ₂ OL	12

Packaged Condensing Units

QuietCO ₂ OL™	13
QuietCO ₂ OL™ Multi-Compressors Outdoor	14
GC5 CO ₂	15
GC5 Hybrid	16

Gas Coolers

Soprano® CO ₂	17
Soprano® CO ₂ (Centrifugal)	18
Alto™ CO ₂	19
Tenor® CO ₂	20
Tenor® CO ₂ (Centrifugal)	21

Air Coolers

Solo™ 25-31 XS CO ₂	22
Solo™ 25-31-35 CO ₂	23
Duo™ 31-35 CO ₂	24
SoloCO ₂ OL®	25

HFC / HFO

Rack units

CCR H/CCB HL	26
CKR SH/CKB SH	27
CCR SH/CCB SH	28

Bare units

GRS	29
GSB™ SH	30
GF31	
GFS	32

Packaged Condensing Units

Minicold	33
Supercold™ SH/Scroll	34
Quietis® Evolution	35
Quietis® G (Centrifugal)	36
Quietor® Evolution	37
Quietor® SH	38
Quietor® City (Centrifugal)	39
GCV SH/Scroll	40
GC SH	41
GC5	42

Air-Cooled Condensers

Adagio	43
Alto™	44
Tenor®	45
Sirocco™ / CAC (Centrifugal)	46


Fluid Coolers

Adagio Fluid Cooler	47
Alto™ Fluid Cooler	48
Tenor® Fluid Cooler	49

Air Coolers

Solo™ 25-31 XS	50
Solo™ 25-31-35	51
Duo™ 31-35	53
Solo 50-60-80	54
Duo Evolution	55
QFC/QFR	56

Our products

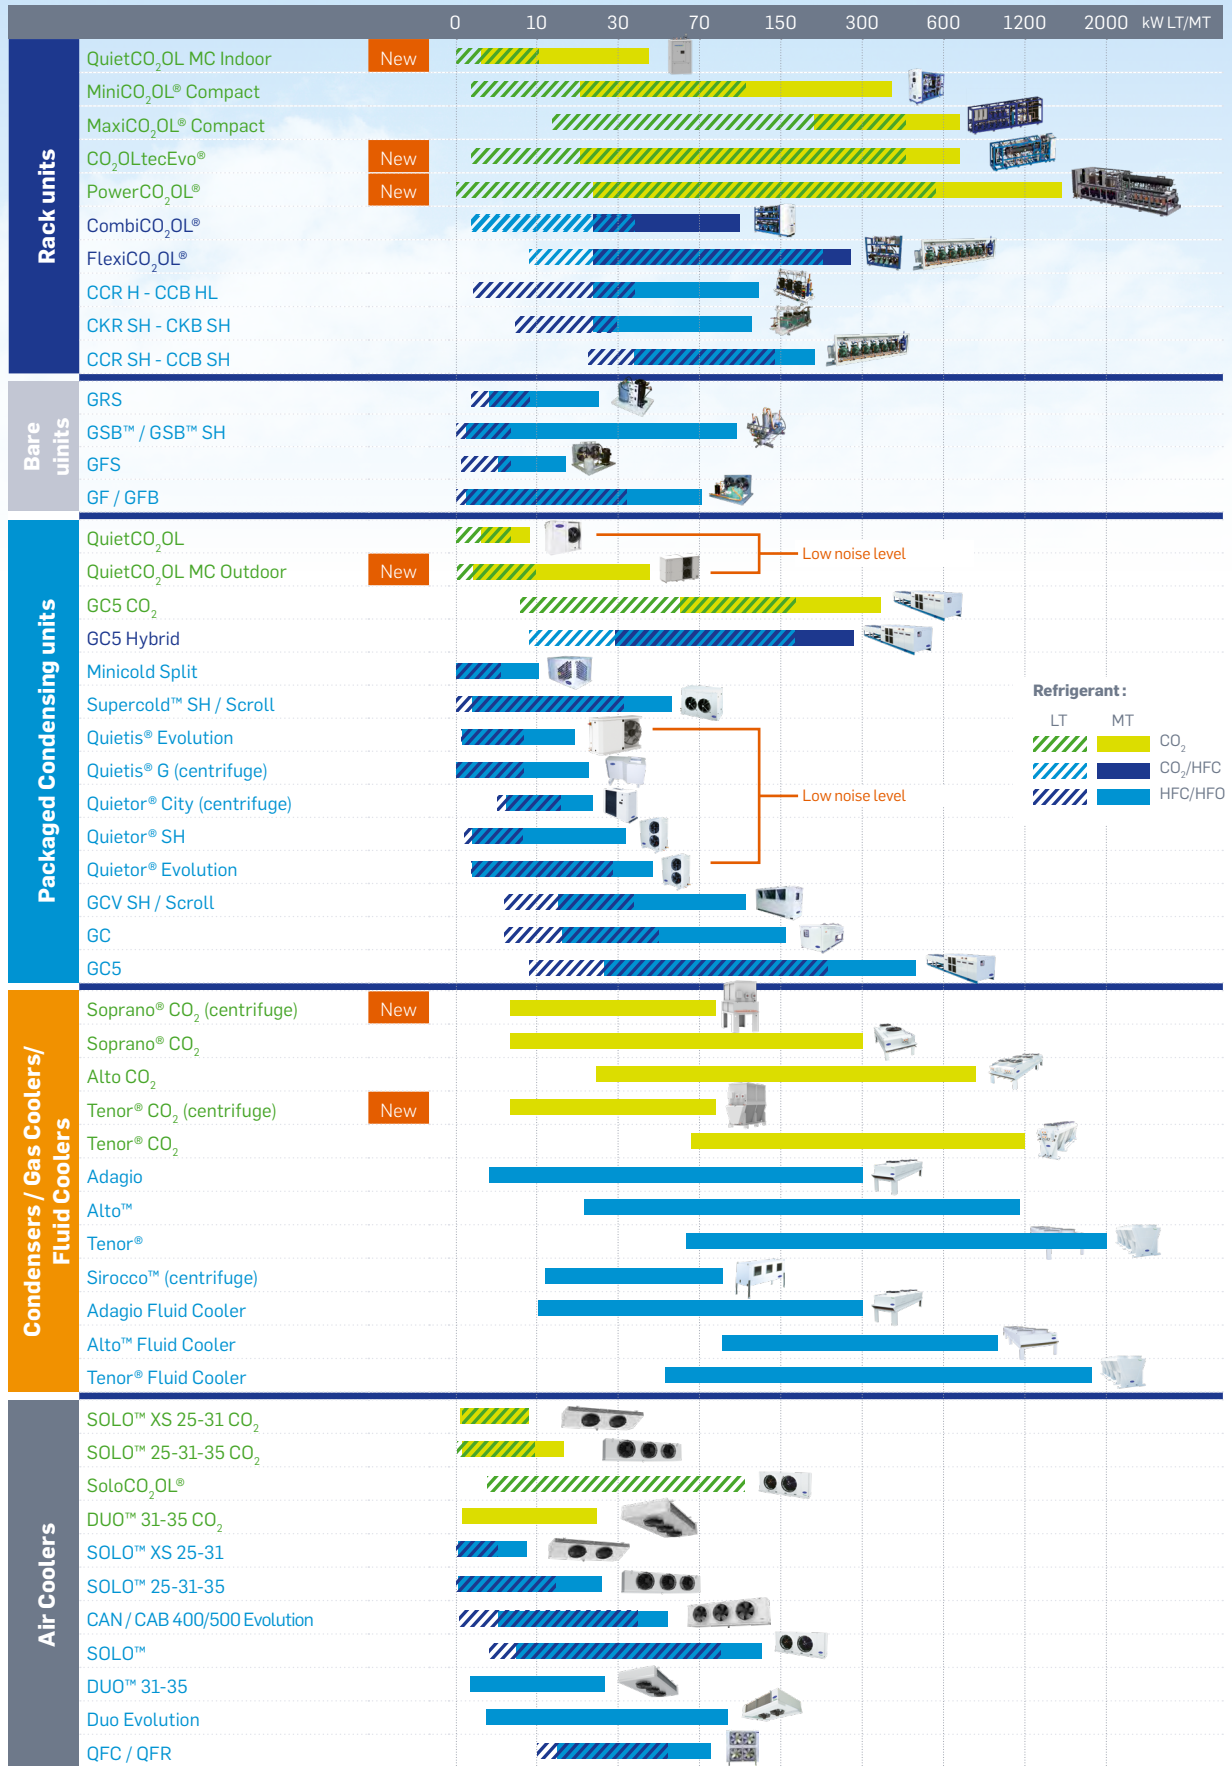

Solutions for various types of applications

Retail Stores

- Food retail C-stores
- Medium & large supermarkets
- Hard discounters



Recommended products

Refrigeration Power Packs:



MiniCO₂OL® compact

Air-Cooled gas coolers:



Alto™ CO₂

Air Coolers:



SOLO™ 25-31-35 CO₂



DUO™ 31-35 CO₂

Food service

- Restaurants
- Catering
- Petrol stations
- Large kitchens



Recommended products

Packaged condensing units:



QuietCO₂OL & QuietCO₂OL Multi-compressors



Quietor® Evolution

Air Coolers



SOLO™ 25-31 XS CO₂

Cold storage

- Warehouses
- Large cold rooms



Recommended products

Refrigeration Power Packs:



MaxiCO₂OL® compact



PowerCO₂OL™ (Chiller)

Air-cooled condensers & Gas Coolers:



Tenor®

Air Coolers:



SoloCO₂OL® et DUO™


Industry

- Process cooling




Recommended products

Rack Units

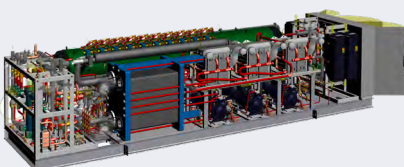

PowerCO₂OL™ (Pump system)

Packaged Condensing Units:



GC5

Air-Cooled Gas Coolers:



Alto™


QuietCO₂OL Multi-Compressors Indoor

Compact refrigeration rack unit for convenience stores, gas stations and small to medium cold rooms

- Uses CO₂ natural refrigerant
- Small size unit for indoor installation (800 x 1200 x 1800 mm)
- Designed for small and medium store formats
- Semi-hermetic reciprocating & Hermetic Rotary version
- Booster on the semi-hermetic version
- Integrated electrical control panel with controller
- Integrated medium pressure receiver
- Removable side panels for easy maintenance access
- Serviceability from the front
- Heating & air conditioning capabilities
- Large capacity control
- Can be split into 2 modules

Design PS:

- LT Suction: 80 Bar
- MT Suction: 80 Bar
- Liquid receiver: 80 Bar
- Gas cooler discharge: 120 Bar

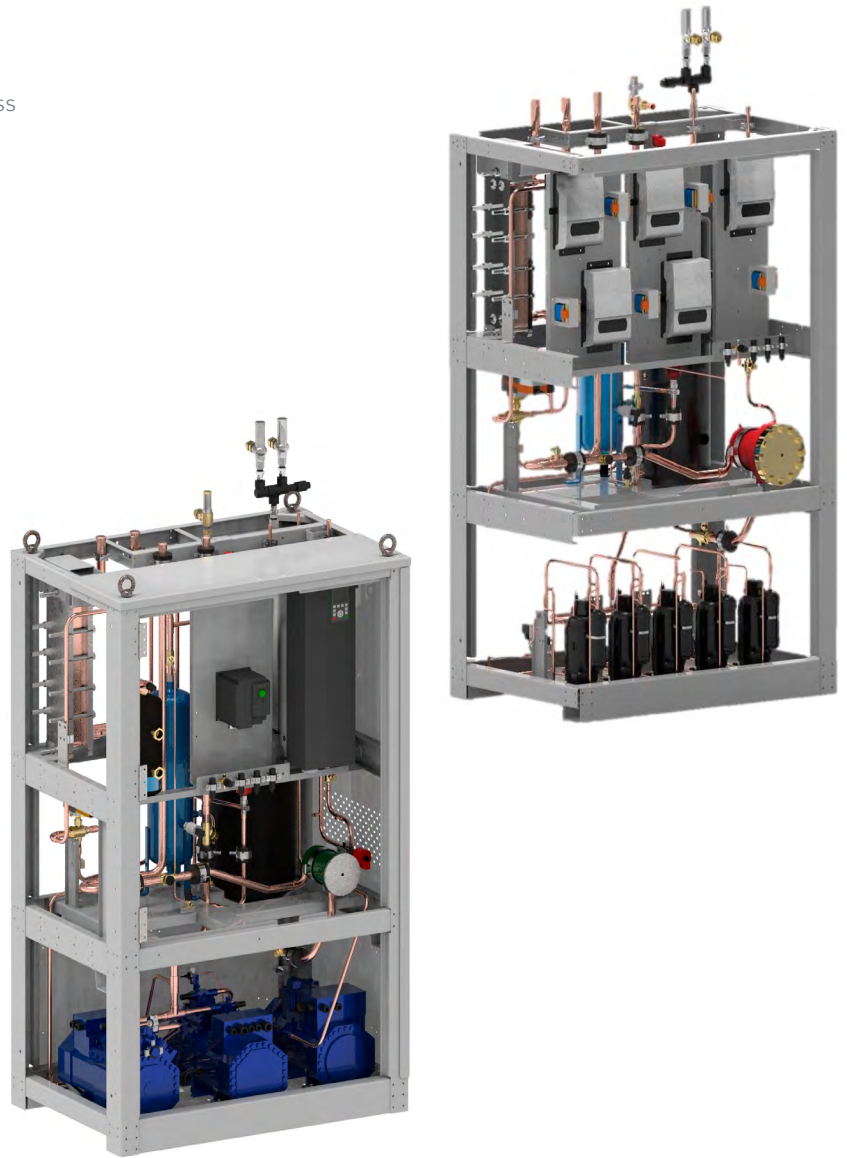

QuietCO ₂ OL® MC Indoor	MT application	LT application (Semi-hermetic)
No. of compressors	1-5 (Rotary) / 1-2 (Semi-hermetic)	1
Refrigeration capacity	2 – 50 kW	0 – 10 kW
Refrigerant	R744	

Evaporating temp. MT -8°C/BT -32°C; Ambient temperature= 32°C

MiniCO₂OL[®] Compact

Transcritical CO₂ booster rack for medium to large supermarkets

- Not affected by the EU F-Gas Regulation
- Compact unit for indoor installation
- Single or dual temperature range
- Semi-hermetic compressors
- Integrated electrical control panel incorporating rack and gas cooler controls
- Variable speed drive for primary compressor
- Optional parallel compression (ECO compressor)
- Optional outdoor housing with built-on gas cooler
- Optional heat recovery & air conditioning
- Variety of options available

Design PS:

- LT Suction: 30 Bar (Optional 60, 80 Bar)
- MT Suction: 45 Bar (Optional 52, 60, 80 Bar)
- Liquid receiver: 45 Bar (Optional 52, 60, 80 Bar)
- Gas cooler discharge: 120 Bar



MiniCOOL₂compact

MiniCO ₂ OL [®] compact	MT application	LT application
No. of compressors	2 – 6	0 – 4
Refrigeration capacity	20 – 380 kW ⁽²⁾	2 – 110 kW ⁽¹⁾
Refrigerant	R744	

(1) -30°C / -5°C. (2) -5°C / +36°C outside (negative heat rejection not deducted)

MaxiCO₂OL[®] Compact

Transcritical CO₂ booster rack for medium to large supermarkets and warehouses

- Uses CO₂ natural refrigerant
- Not affected by the EU F-Gas Regulation
- Flexible unit for indoor installation
- Modular product makes the installation easy
- Designed for large store formats and warehouses
- Single or dual temperature range
- 6 cylinders semi-hermetic compressors
- Integrated electrical control panel incorporating rack and gas cooler controls
- MT & LT variable speed drive on the lead compressor
- Optional parallel compression (ECO compressor)
- Optional outdoor housing with built-on gas cooler
- Optional heat recovery & air conditioning
- Variety of options available

Design PS:

- LT Suction: 25 Bar (Optional 30, 52, 60 Bar)
- MT Suction: 45 Bar (Optional 52, 60 Bar)
- Liquid receiver: 45 Bar (Optional 52, 60, 80 Bar)
- Gas cooler discharge: 120 Bar



MaxiCO ₂ OL [®] compact	MT application	LT application
No. of compressors	3 – 6	0 – 4
Refrigeration capacity	200 – 550 kW ⁽²⁾	0 – 360 kW ⁽¹⁾
Refrigerant	R744	

⁽¹⁾ -30°C / -5°C. ⁽²⁾ -5°C / +36°C outside (negative heat rejection not deducted)

CO₂OLtec® Evo


New generation of transcritical CO₂ rack with modulating ejector and CO₂ pump for small to large supermarkets and warehouses

- Uses CO₂ natural refrigerant
- High-efficiency CO₂ solution for all climates
- Includes advanced modulating vapor ejector technology (patented)
- Designed for small to large store formats, for indoor installation
- Semi-flooded operation allowing higher efficiency and better food conservation
- Single or dual temperature range
- Semi-hermetic compressors Integrated electrical control panel incorporating controls for rack, high-efficiency module and gas cooler
- Variable speed drive on the lead compressor
- Variety of options available to further improve efficiency in all climates

Up to 40%*
energy
savings

Design PS:


- LT Suction: 30 Bar
- MT Suction: 52 Bar (Optional 52, 60 Bar)
- Liquid receiver: 52 Bar (Optional 52, 60, 80 Bar)
- Gas cooler discharge: 120 Bar

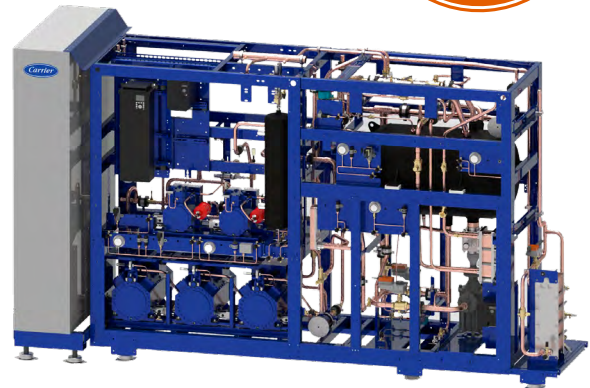

CO₂OLtec®Evo Single frame – MiniCO₂OL® compact with integrated High-efficiency module



MiniCO₂OL® compact or MaxiCO₂OL® compact

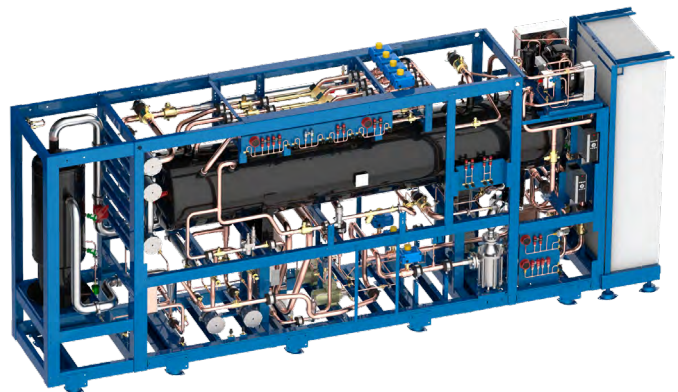

High-efficiency module



CO ₂ OLtec®Evo		MT application	LT application
CO ₂ OLtec® Evo single frame**	No. of compressors	3 – 5	0 – 4
	Refrigeration capacity	Up to 260 kW***	Up to 92 kW***
CO ₂ OLtec® Evo 2 frames	No. of compressors	2 – 6	0 – 4
	Refrigeration capacity	65 – 600 kW***	0 – 450 kW***
	Refrigerant	R744	

* Up to 40% energy savings compared to a standard HFC system; up to 30% energy savings compared to a standard CO₂ transcritical system.

** Some options are not available on this model.

*** see operating conditions for MiniCO₂OL® or MaxiCO₂OL® compact

PowerCO₂OL™

Industrial CO₂ transcritical solution

- Uses CO₂ natural refrigerant
- Not affected by the EU F-Gas Regulation
- Single or dual evaporating temperature
- Chiller version
- Optional outdoor frame for outdoor installation
- Semi-hermetic compressors (6 cylinders)
- Integrated controls (rack and gas cooler)
- Designed for the following applications:


Heat pump
Distribution center
Food industry
Hypermarket
Sport venues
Ice rink
Air conditioning
Data Center
Tunnel freezer

Single evaporating temperature MT	✓	✓	✓	✓	✓	✓	✓	✓
Dual evaporating temperature MT+LT	✓	✓	✓	✓				
Single evaporating temperature LT	✓	✓	✓	✓				✓

- Inverter on the main compressor
- (MT and LT as standard)
- Modulating vapor ejector
- Heat recovery and air conditioning (Option)
- Numerous options available

Service pressure:

- Suction LT: 80 Bar (Optional 60 Bar)
- Suction MT: 80 Bar (Optional 60 Bar)
- Liquid receiver: 80 Bar
- Gas cooler discharge: 120 Bar

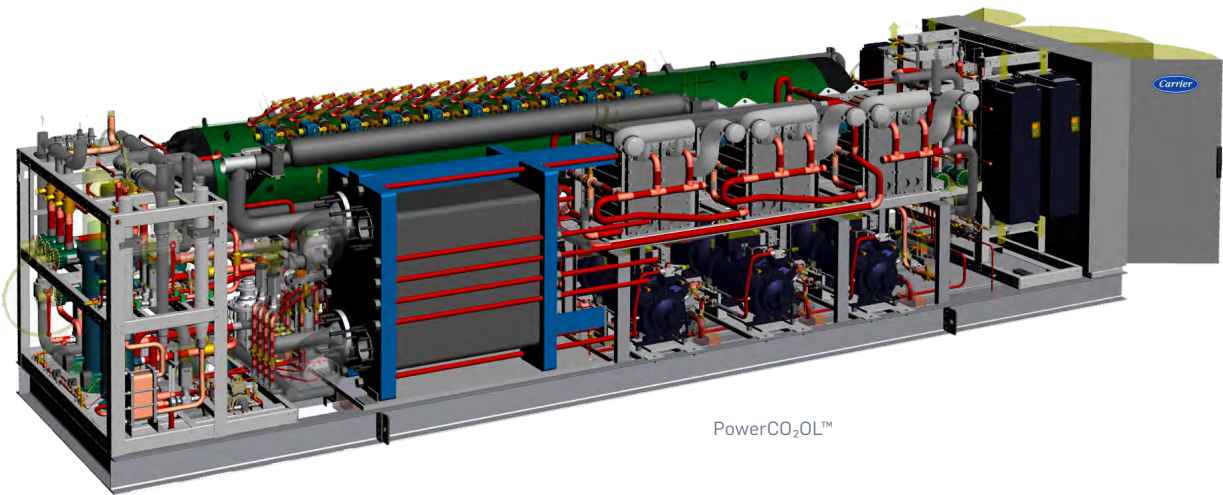

PowerCO₂OL™



PowerCO ₂ OL™	MT application	LT application
No. of compressors	3 – 8	0 – 6
Refrigeration capacity	Up to 1500 kW*	Up to 550 kW*
Refrigerant	R744	

* 32°C /-10°C. (2) -10°C /+36°C ambient air temperature (negative heat rejection not deducted)

FlexiCO₂OL[®]

R134a / CO₂ cascade compressor rack for medium to large supermarkets and warehouses

- Uses natural refrigerant CO₂ for low temperature
- LT rack only (MT rack on another frame)
- Indoor installation
- Designed for supermarkets and hypermarkets
- Single or dual temperature range
- Semi-hermetic compressors
- Integrated electrical control panel with controller and condenser control
- CO₂ refrigerant receiver with liquid line
- Cascade heat exchanger
- Available as Brine/CO₂ cascade
- Variety of options available

Design PS:

- LT Suction: 25 Bar
- LT Discharge: 45 Bar
- MT Suction: 17 Bar
- MT Discharge: 19 Bar



FlexiCO ₂ OL [®]	MT application	LT application
No. of compressors	3 – 6	2 – 4
Refrigeration capacity	29 – 279 kW	9 – 171 kW
Refrigerant	R134a	R744

Evaporating temp. /condensing temp.: MT -8°C / 45°C; LT -35°C / -10°C


CombiCO₂OL

Hybrid cascade stacked refrigeration rack combining a CO₂ LT rack running as a cascade and a R134a MT rack for medium to large supermarket

- Uses natural refrigerant CO₂ for low temperature
- Adapted for supermarkets and hypermarkets
- Indoor installation
- Single or dual temperature range
- R134a compressors for an optimized Coefficient of Performance (COP)
- Integrated CO₂ refrigerant receiver
- Cascade heat exchanger
- Easy installation and maintenance
- Stacked compressors for space saving
- Electrical enclosure integrated as standard with one controller per rack
- Other refrigerants available: R449A, R448A, R407F, R513A
- Variety of options available

Design PS:

- LT Suction: 25 Bar
- LT Discharge: 45 Bar
- MT Suction: 17 Bar
- MT Discharge: 19 Bar

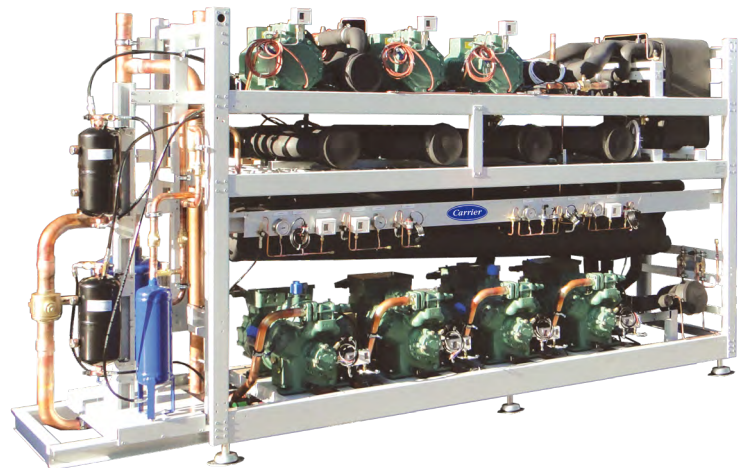

CombiCO ₂ OL®	MT application	LT application
No. of compressors	2 – 4	1 – 3
Refrigeration capacity	24 – 125 kW	2 – 33 kW
Refrigerant	R134a	R744

Evaporating temp.: MT -8°C / LT -35°C; Ambient temp. = 32°C

QuietCO₂OL™

Packaged refrigeration unit for food retail and small store format

- Uses CO₂ natural refrigerant
- Not affected by the EU F-Gas Regulation
- Small size unit for outdoor application
- Designed for small store formats and store extensions
- Saves indoor space
- Single temperature range
- Hermetic compressor
- Integrated electrical control panel with controller
- Integrated gas cooler and medium pressure receiver
- Water cooled version
- Removable side panels for easy maintenance access
- Polar kit version available (EC fan + electrical panel heater)

Design PS:

- LT Suction: 80 Bar
- MT Suction: 80 Bar
- Liquid receiver: 90 Bar
- Gas cooler discharge: 120 Bar



QuietCO₂OL™

QuietCO ₂ OL™	MT application	LT application
No. of compressors	1	2
Refrigeration capacity	0,8 – 9,1 kW	0,7 – 6,5 kW
Refrigerant	R744	

Evaporating temp. MT -8°C/BT -32°C; Ambient temperature= 32°C

QuietCO₂OL™ Multi-Compressors Outdoor

**Packaged refrigeration unit for convenience stores,
gas stations and small to medium cold rooms**

- Uses CO₂ natural refrigerant
- Small size unit for outdoor application
- Semi-hermetic reciprocating & hermetic rotary version
- Large capacity control 30-70Hz (SH) and 25-100rps (Rotary)
- Designed for small and medium store formats
- Booster on the semi-hermetic version
- Integrated gas cooler and medium pressure receiver
- Available also without gas cooler for small outdoor space
- Saves indoor space
- Integrated electrical control panel with controller
- Removable side panels for easy maintenance access
- Light weight for easier handling and lower structure impact
- Design PS:
 - LT Suction: 80 Bar (Optional 60, 52 Bar)
 - MT Suction: 80 Bar (Optional 60, 52 Bar)
 - Liquid receiver: 80 Bar (Optional 60, 52 Bar)
 - Gas cooler discharge: 120 Bar

Design PS:

- LT Suction: 80 Bar (Optional 60, 52 Bar)
- MT Suction: 80 Bar (Optional 60, 52 Bar)
- Liquid receiver: 80 Bar (Optional 60, 52 Bar)
- Gas cooler discharge: 120 Bar



QuietCO₂OL MC Outdoor



QuietCO₂OL MC Outdoor without gas cooler



Outdoor SH version



Outdoor Rotary version

QuietCOOL₂MC

QuietCO ₂ OL® MC Outdoor	MT application	LT application (Semi Hermetic)
No. of compressors	1-5 (Rotary) / 1-2 (Semi-hermetic)	1
Refrigeration capacity	2 – 50 kW	0 – 10 kW
Refrigerant	R744	

Evaporating temp. MT -8°C/BT -32°C; Ambient temperature= 32°C

GC5 CO₂

Transcritical CO₂ Booster rack for medium to large supermarkets and warehouses

- Uses natural refrigerant CO₂
- Outdoor unit for large cooling capacities
- Compatible racks: MiniCO₂OL Compact, MaxiCO₂OL Compact, CO₂OLtec Evo
- Can be customized to suit customer requirements
- Saves indoor space
- Single or dual temperature range
- Semi-hermetic compressors
- Integrated electrical control panel with controller
- Integrated gas cooler and medium pressure receiver
- Low sound level version
- Walk-in housing

Design PS:

- LT Suction: 30 Bar
- MT Suction: 45 Bar (Optional 52, 60 Bar)
- Liquid receiver: 45 Bar (Optional 52, 60, 80 Bar)
- Gas cooler discharge: 120 Bar



MiniCO₂ compact

MaxiCO₂ compact

CO₂OLtec Evo

GC5 CO ₂ [®]	MT application	LT application
No. of compressors	6	4
Refrigeration capacity	65 – 600 kW	0 – 450 kW
Refrigerant	R744	

⁽¹⁾ -32°C / -10°C. ⁽²⁾ -10°C / +36°C ambient temperature (Capacity rejetée négative non prise en compte)

GC5 Hybrid

Packaged refrigeration unit for medium to large supermarkets and warehouses

- Uses natural refrigerant CO₂ for low temperature
- Outdoor unit for large cooling capacities
- Can be customized to suit customer requirements
- Saves indoor space
- Dual temperature range
- Semi-hermetic compressors
- Integrated electrical control panel with controller
- Integrated gas cooler and medium pressure receiver
- Walk-in housing
- Other HFC refrigerant available: R449A, R448A, R407F, R513A

Design PS:

- LT Suction: 30 Bar
- Refoulement BT : 45 Bar
- MT Suction: 17 Bar
- MT Discharge: 19 Bar



HybridCOOL₂

GC5 Hybrid	MT application	LT application
No. of compressors	3 – 6	2 – 4
Refrigeration capacity	29 – 279 kW	9 – 171 kW
Refrigerant	R134a	R744

Evaporating temp. MT -8°C/BT -32°C; Ambient temperature= 32°C

Soprano® CO₂

Air-cooled gas cooler for commercial refrigeration applications

- Uses CO₂ natural refrigerant
- Small to medium sized capacities
- Outdoor application
- Single or double row design
- Vertical or horizontal airflow
- Robust casing
- High-efficiency EC fans and motors
- Modbus control for EC fans
- Energy savings and reduction of CO₂ emissions thanks to EC technology
- Compliant with ErP Directive
- Undergoing EUROVENT approval
- Design PS: 120 Bar



Soprano® CO ₂	
No. of fans	1 – 6
Capacity	7 – 300 kW
Refrigerant	R744

Air temp. = 32°C; gas cooler temp. out = 34°C

Soprano[®] CO₂ (Centrifugal)

Air-cooled gas cooler for commercial refrigeration applications

- Uses CO₂ natural refrigerant
- Small to medium-sized capacities
- Indoor application
- Single row design
- Adjustable air flow
- Ductable for 3 different blowing direction
- Robust casing
- Compact design
- Splitable into 2 modules
- Installation possible against a wall
- Easy fans and casing disassembly
- High-efficiency EC centrifugal fans
- Analog signal or Modbus fan control
- Energy savings and CO₂ emissions reduction thanks to EC technology
- Compliant with ErP Directive
- Design PS: 120 Bar



Soprano CO ₂ (Centrifugal)	
No. of fans	1 - 3
Capacity	3.7 - 92 kW
Refrigerant	R744

Air temp. = 32°C; gas cooler temp. out = 34°C

Rack units

Bare units

Packaged Condensing Units


Condensers / Gas Coolers / Fluid Coolers

Air Coolers

Alto™ CO₂

Air-cooled gas cooler for commercial and industrial refrigeration applications

- Uses CO₂ natural refrigerant
- Small to medium-sized capacities
- Outdoor installation
- Single or double row design
- Vertical or horizontal airflow
- Robust casing
- High-efficiency EC fans and motors
- Modbus control for EC fans
- Energy savings and reduction of CO₂ emissions thanks to EC technology
- Compliant with ErP Directive
- Undergoing EUROVENT approval
- Design PS: 120 Bar

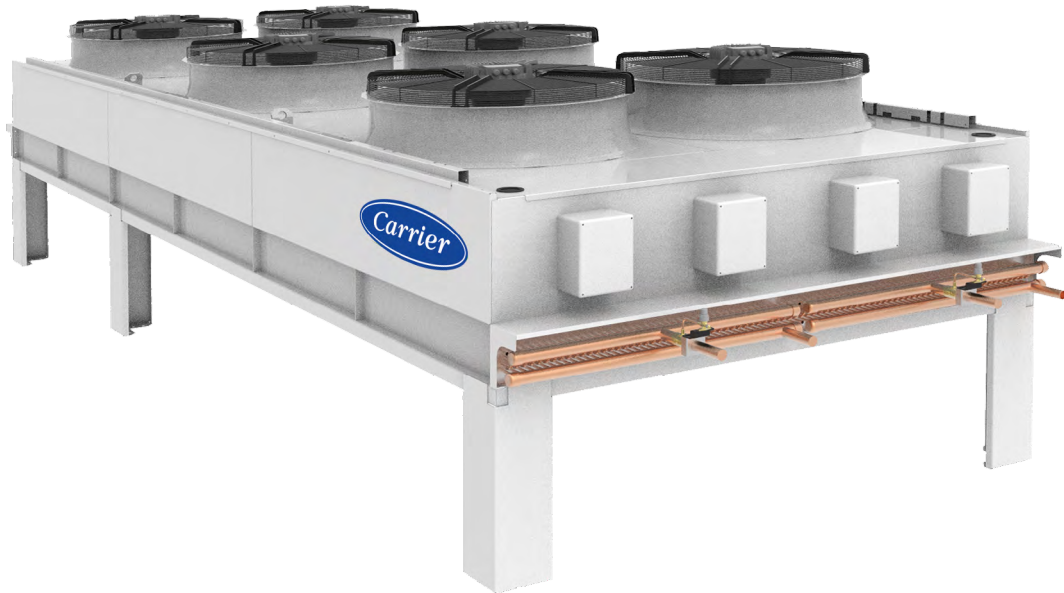

Alto™ CO ₂	
No. of fans	1 - 10
Capacity	23 - 840 kW
Refrigerant	R744

Air temp. = 32°C; gas cooler temp. out = 34°C

Tenor[®] CO₂

Air-cooled gas cooler for commercial and industrial refrigeration applications

- Uses CO₂ natural refrigerant
- Large capacities
- Outdoor installation
- Single or double row design
- Vertical airflow
- Robust casing
- High-efficiency EC fans
- Reduced footprint due to V-shaped configuration
- Modbus control for EC fans
- Energy savings and reduction of CO₂ emissions thanks to EC technology
- Compliant with ErP Directive
- Undergoing EUROVENT approval
- Design PS: 120 Bar



Tenor [®] CO ₂	
No. of fans	2 – 16
Capacity	64 – 1208 kW
Refrigerant	R744

Air temp. = 32°C; gas cooler temp. out = 34°C

Tenor[®] CO₂ (Centrifugal)

Air-cooled gas cooler for commercial refrigeration applications

- Uses CO₂ natural refrigerant
- Small to medium-sized capacities
- Indoor application
- Reduced footprint thanks to the V- shape configuration
- Single row design
- Adjustable air flow
- Ductable for 3 different blowing direction
- Robust casing
- Compact design
- Splittable into 2 modules
- Installation possible against a wall
- Easy fans and casing disassembly
- High-efficiency EC centrifugal fans
- Analog signal or Modbus fan control
- Energy savings and CO₂ emissions reduction thanks to EC technology
- Compliant with ErP Directive
- Design PS: 120 Bar



Tenor [®] CO ₂ (Centrifugal)	
No. of fans	1 – 3
Capacity	3.7 – 92 kW
Refrigerant	R744

Air temp. = 32°C; gas cooler temp. out = 34°C

Solo™ 25-31 XS CO₂

Air cooler for commercial applications

- Uses CO₂ natural refrigerant
- Compact, ceiling-mounted air cooler
- Designed for refrigerated display cases and small cold rooms
- Aluminium-Magnesium alloy casing
- Axial fans
- Finned coil with smooth copper tubes and aluminium fins
- Large choice of fan diameter as well as fin spacing
- Optional coil coating, electric defrost and EC fan
- Compliant with ErP Directive
- Design PS: 80 Bar



Solo™ 25-31 XS CO ₂	MT application	LT application
No. of fans	1 – 4	2 – 3
Refrigeration capacity	0,74 – 7,3 kW	0,59 – 6 kW
Refrigerant	R744	

Fluid = R744; inlet air temp./evaporating temp.: MT = 0°C/-8°C; LT = -18°C/-25°C

Solo™ 25-31-35 CO₂

Air cooler for commercial applications

- Uses CO₂ natural refrigerant
- Ceiling-mounted cubic air cooler
- Designed for all types of cold rooms from small to medium capacities
- Aluminium-Magnesium alloy casing
- Axial fans
- Finned coil with copper tubes and aluminium fins
- Large choice of fan diameter as well as fin spacing
- Casing complete with doors and removable pan
- Optional coil coating, electric defrost and EC fan
- Compliant with ErP Directive
- Design PS: 80 Bar



Solo™ 25-31-35 CO ₂	MT application	LT application
No. of fans		1 – 5
Refrigeration capacity	1,2 – 23,9 kW	1 – 16,4 kW
Refrigerant		R744

Fluid = R744; inlet air temp./evaporating temp.: MT = 0°C/-8°C; LT = - 18°C/-25°C

Duo™ 31-35 CO₂

Air cooler for commercial applications

- Uses CO₂ natural refrigerant
- Ceiling-mounted dual-discharge air cooler
- Designed for working areas, such as preparation rooms
- Aluminium-Magnesium alloy casing
- Low air speed for occupied areas
- Axial fans
- Comfortable sound level
- Finned coils with smooth copper tubes and aluminium fins
- Specially designed casing for easy cleaning and maintenance access
- Optional coil coating, electric defrost and EC fan
- Compliant with ErP Directive
- Design PS: 80 Bar



Duo™ 31-35 CO ₂	
No. of fans	1 - 5
Refrigeration capacity	2,6 - 24,6 kW
Refrigerant	R744

Fluid = R744; inlet air temp./evaporating temp.: MT = 10°C/0°C

SoloCO₂OL[®]

Industrial air cooler for large capacity low temperature applications

- Uses CO₂ natural refrigerant
- Ceiling-mounted cubic air cooler
- Designed for large capacity refrigeration, storage and freezing applications
- Easy to install and maintain
- Coolers delivered in mounting position (with drain pan)
- Finned coil with smooth copper tubes and aluminium fins
- Wired fans with quick connectors and wired heaters
- Air streamer (Option)
- High efficiency defrost (Option)
- Coil treatment (Option)
- Compliant with ErP Directive
- Undergoing EUROVENT approval
- Design PS: 30 Bar



SoloCOOL₂



SoloCO ₂ OL [®]	
No. of fans	1 – 4
Refrigeration capacity	4 – 111 kW
Refrigerant	R744

Fluid = R744; inlet air temp./evaporating temp.: LT = -18°C/-25°C

CCR H/CCB HL

Compressor pack system for small to medium supermarket

- Hermetic scroll compressors
- Indoor installation
- Designed for supermarkets
- Single or dual temperature range
- Refrigerant receiver with liquid line
- Variety of options available
- Extended operation range



CCR H - CCB H	MT application	LT application
No. of compressors	2 - 4	2 - 4
Refrigeration capacity	6 - 101 kW	3 - 36 kW
Refrigerant	R134A/R407F/R448A/R449A/R513A/R450A	R407F/R448A/R449A

Performance data with Reference fluid (without glide), -10°C/+45°C(MT), -35°C/+40°C (LT), 20K superheat

CKR SH/CKB SH

Compressor pack system for small to medium supermarket

- Semi-hermetic Ecoline compressors
- Indoor installation
- Designed for supermarkets
- Single or dual temperature range
- Refrigerant receiver with liquid line
- Variety of options available



CKR SH - CKB SH	MT application	LT application
No. of compressors	2 - 4	2 - 4
Refrigeration capacity 22 - 110 kW	22 - 110 kW	7 - 30 kW
Refrigerant	R134A/R407F/R448A/R449A/	R407F/R448A/R449A

Performance data with Reference fluid (without glide), -10°C/+45°C(MT), -35°C/+40°C (LT), 20K superheat

CCR SH/CCB SH

Compressor pack system for small to large supermarket

- Semi-hermetic Ecoline compressors
- Indoor installation
- Designed for supermarkets and hypermarkets
- Single or dual temperature range
- Refrigerant receiver with liquid line
- Variety of options available



CCR SH - CCB SH	MT application	LT application
No. of compressors	2 – 6	2 – 5
Refrigeration capacity	38-190 kW	21 – 140 kW
Refrigerant	R134A/R407F/R448A/R449A/R513A/R450A	R134A/R407F/R448A/R449A

Performance data with Reference fluid (without glide), -10°C/+45°C(MT), -30°C/+40°C (LT), 20K superheat

Compressor receiver set for cold room application

- Ideal for indoor installation
- Designed for a single cooling application
- Hermetic scroll compressor
- Liquid injection system for low temperature models
- Refrigerant receiver
- Easy handling and installation
- Variety of options available




GRS	MT application	LT application
No. of compressors		1
Refrigeration capacity	2 – 70 kW	0 – 31 kW
Refrigerant	R134A (MT only)/R407F/R448A/R449A	

Performance data with Reference fluid (without glide), -10°C/+45°C(MT), -35°C/+40°C (LT), 20K superheat

GSB™ SH

Air-cooled condensing unit for cold room application

- Space saving design for indoor installation
- Designed for a small to medium cooling capacity application
- Semi-hermetic compressor
- Compressor cylinder head cooling fans (depending on model)
- Condenser mounted and connected
- Refrigerant receiver mounted and connected
- Easy handling and installation
- Variety of options available

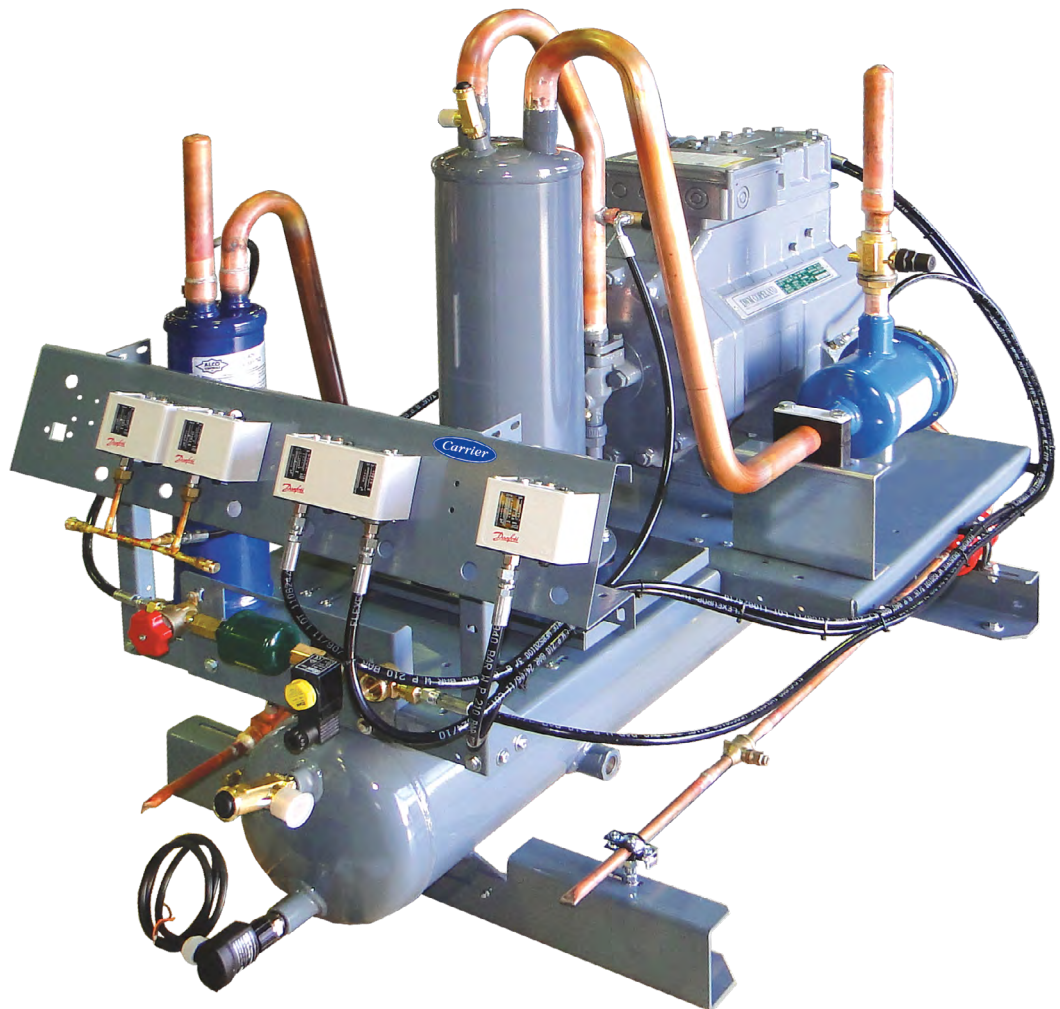

GSB™ SH	MT application	LT application
No. of compressors	1	1
Refrigeration capacity	2 – 108 kW	0 – 43 kW
Refrigerant	R134A (MT only)/R407F/R448A/R449A	

Performance with the reference fluid : Evaporating temperature -10°C (MT) & -35°C (LT). Ambient +32°C. Superheat 10K

GF

Air-cooled condensing unit for cold room application

- Space saving design for indoor installation
- Designed for a small to medium cooling capacity application
- Semi-hermetic compressor
- Compressor cylinder head cooling fans (depending on model)
- Condenser mounted and connected
- Refrigerant receiver mounted and connected
- Easy handling and installation
- Variety of options available



GF	MT application	LT application
No. of compressors	1	
Refrigeration capacity	2 – 70 kW	0 – 31 kW
Refrigerant	R134A (MT only)/R407F/R448A/R449A	

Performance with the reference fluid : Evaporating temperature -10°C (MT) & -35°C (LT). Ambient +32°C. Superheat 10K

GFS

Air-cooled condensing unit for cold room application

- Hermetic scroll compressor
- Space saving design for indoor installation or under shelter from the weather
- Designed for a small cooling capacity application
- Coil with copper tubes and aluminium fins
- Cylinder head cooling fan (depending on the model)
- Easy installation
- Variety of options available



GFS	MT application	LT application
No. of compressors	1	1
Refrigeration capacity	5 – 17 kW	1 – 6 kW
Refrigerant	R134A (MT only)/R407F/R448A/R449A	

Performance with the reference fluid : Evaporating temperature -10°C (MT) & -35°C (LT). Ambient +32°C. Superheat 10K

Minicold

Refrigeration unit for cold room application

- Condensing unit for outdoor installation
- Designed for low temperature freezer rooms and medium temperature chiller rooms
- Version available for wine cellar
- Hermetic compressor
- Remote electrical control panel for wall mounting
- Controller manages compressor, fans, temperature alarm and lighting
- Variety of options available



Minicold	MT application	LT application
No. of compressors ¹	1	
Refrigeration capacity	0 – 10 kW	0 – 5 kW
Refrigerant	R452A / R449A / R448A (MT only)	

Reference fluid (without glide), cold room temp. MT +0°C/LT -25°C; ambient temperature = 32°C

Supercold™ SH/Scroll

Split refrigeration unit for cold room application

- Condensing unit for outdoor installation
- Designed for low temperature and medium temperature cold rooms
- Hermetic scroll compressor or semi-hermetic compressor
- Integrated electrical control panel
- Variety of options available



Supercold™ SH/SCROLL	MT application	LT application
No. of compressors	1	1
Refrigeration capacity	2 – 55 kW	0 – 31 kW
Refrigerant	R134A (MT only) / R407F / R448A / R449A	

Reference fluid (without glide), cold room temp. MT +0°C/LT -25°C; ambient temperature = 32°C

Quietis® Evolution

Air-cooled condensing unit for cold room and cabinet application

- Compact design for outdoor installation
- Designed for cold room or display cabinet applications
- Low sound level
- Hermetic reciprocating compressors
- Articulated electrical terminal block, all components factory wired
- Hinged door with large opening angle for easy maintenance access
- Easy wall mounting fix and set (kit for single fan models)
- Variety of options available



Quietis®	MT application	LT application
No. of compressors	1 – 2	
Refrigeration capacity	0 – 18 kW	0 – 8 kW
Refrigerant	R134A (MT) / R513A (MT) / R448A (MT) / R449A (MT) / R452A (BT)	

Reference fluid (without glide), evaporating temp. MT -10°C/LT -35°C; ambient temperature = 32°C

Quietis® G (Centrifugal)

Indoor air-cooled condensing unit for cold room and cabinet application

- Compact design for indoor installation
- Designed for cold room or display cabinet applications
- Centrifugal fans with 180/250 Pa available static pressure for air duct connection
- Low sound level
- Hermetic reciprocating compressors or scroll compressors
- Outdoor version available
- Integrated control box, all components factory wired
- Removable compressor compartment and top panels for easy maintenance access
- Wall mounting kit for single fan models
- Variety of options available Quietis



Quietis® G (Centrifugal)	MT application	LT application
No. of compressors	1	1
Refrigeration capacity	0 – 18 kW	0 – 8 kW
Refrigerant	R134a (MT) / R513A (MT) / R449A (MT) / R452A	

Reference fluid (without glide), evaporating temp. MT -10°C/LT -35°C; ambient temperature = 32°C

Quietor® Evolution

Air-cooled condensing unit for cold room and cabinet application

- Compact design for outdoor installation
- Designed for use with multiple display cabinets and/or cold rooms
- Low sound level
- Scroll or digital scroll compressors
- Integrated control box
- Removable side panels for easy maintenance access
- Variety of options available



Quietor® Evolution	MT application	LT application
No. of compressors	1 – 2	
Refrigeration capacity	2 – 46 kW	2 – 28 kW
Refrigerant	(R134a/R513A/R450A - MT only) / R407F / R448A / R449A	

Reference fluid (without glide), evaporating temp. MT -10°C/LT -35°C; ambient temperature = 32°C

Quietor® SH

Air-cooled condensing unit for cold room and cabinet application

- Compact design for outdoor installation
- Designed for use with multiple display cabinets and/or cold rooms
- Low sound level
- Semi-hermetic compressors
- Integrated control box, all components factory wired
- Removable side panels for easy maintenance access
- Variety of options available, including compressor inverter



Quietor® SH	MT application	LT application
No. of compressors	1	1
Refrigeration capacity	3-31 kW	0-8 kW
Refrigerant	(R134a/R513A/R450A - MT only) / R407F / R448A / R449A	

Reference fluid (without glide), evaporating temp. MT -10°C/LT -35°C; ambient temperature = 32°C

Quietor® City (Centrifugal)

Indoor air-cooled condensing unit for cold room and cabinet application

- Compact design for indoor installation
- Designed for use with multiple display cabinets and/or cold rooms
- Centrifugal fans with 200 Pa available static pressure for air duct connection
- Low sound level
- 1 or 2 hermetic scroll compressors (with 1 digital)
- EC fans
- Integrated control box, all components factory wired
- Removable side panels for easy maintenance access
- Outdoor version available
- Variety of options available



Quietor® City (Centrifugal)	MT application	LT application
No. of compressors	1 – 2	
Refrigeration capacity	6 – 23 kW	5 – 14 kW
Refrigerant	(R134a/R513A/R450A - MT only) / R407F / R448A / R449A	

Fluide de référence (sans glissement), Evaporating temp. MT -10°C/BT -35°C; ambient temperature= 32°C

GCV SH/Scroll

Air-cooled condensing unit for small to medium supermarket

- Compact design for outdoor installation
- Designed for applications with no machinery room and less space outside
- Small footprint due to integrated V-shape condenser
- Special, low sound level version available
- Semi-hermetic reciprocating compressors or scroll compressors
- Integrated control box, all components factory wired
- Removable side panels for easy maintenance access
- Refrigerant receiver with liquid line
- Variety of options available



GCV SH/Scroll	MT application	LT application
No. of compressors	2 – 4	
Refrigeration capacity	15 – 113 kW	6 – 37 kW
Refrigerant	(R134a/R513A/R450A - MT only) / R407F / R448A / R449A	

Reference fluid (without glide), evaporating temp. MT -10°C/LT -35°C; ambient temperature = 32°C

GC SH

Air-cooled condensing unit for small to medium supermarket

- Compact design for outdoor installation
- Designed for applications with no machinery room and less space outside
- Integrated condenser, positioned adjacent to the compressor housing
- Special, low sound level version available
- Semi-hermetic reciprocating compressors
- Integrated control box, all components factory wired
- Removable side panels for easy maintenance access
- Refrigerant receiver with liquid line
- Variety of options available



GC SH	MT application	LT application
No. of compressors	1 – 2	
Refrigeration capacity	16 – 153 kW	6 – 48 kW
Refrigerant	(R134a/R513A/R450A - MT only) / R407F / R448A / R449A	

Reference fluid (without glide), evaporating temp. MT -10°C/LT -35°C; ambient temperature = 32°C

GC5

Air-cooled condensing unit for medium to large supermarkets and warehouses

- Flexible design for outdoor installation
- Designed for applications without machinery room and restricted space outside
- Integrated condenser, positioned adjacent to the compressor housing
- Can be customized to suit customer requirements
- Semi-hermetic reciprocating compressors or scroll compressors
- Integrated control box, all components factory wired
- Removable side panels for easy maintenance access
- Refrigerant receiver with liquid line
- Variety of options available



GC5	MT application	LT application
No. of compressors	3 – 6	2 – 6
Refrigeration capacity	27 – 479 kW	9 – 213 kW
Refrigerant	R134a/R513A/R450A (MT only) / R407F / R448A / R449A	

Reference fluid (without glide), evaporating temp. MT -10°C/LT -35°C; ambient temperature = 32°C

Adagio

Air-cooled condenser for commercial and air-conditioning applications

- Small to medium-sized capacities
- Outdoor application
- Single or double row design
- Robust casing
- Vertical or horizontal airflow
- Optional high-efficiency EC fans and motors
- Compliant with ErP Directive
- EUROVENT certified



Adagio	
No. of fans	1 – 6
Capacity	4 – 312 kW
Refrigerant	R134a, R407A, R407C, R407F, R417A*, R448A, R449A, R450A, R513A

Fluid = Reference fluid (without glide); inlet air temp. = 25°C; condensing temp. = 40°C subcooling 3K
 *Non Eurovent certified fluids

Alto™

Air-cooled condenser for commercial and industrial refrigeration and air-conditioning applications

- Small to medium-sized capacities
- Outdoor installation
- Single or double row design
- Vertical or horizontal airflow
- Robust casing
- Optional high-efficiency EC fans and motors
- Compliant with ErP Directive
- EUROVENT certified



Alto™	
No. of fans	1 - 12
Capacity	22 - 1128 kW
Refrigerant	R134a, R407A, R407C, R407F, R417A*, R448A, R449A, R450A, R513A

Fluid = Reference fluid (without glide); inlet air temp. = 25°C; condensing temp. = 40°C subcooling 3K
 *Non Eurovent certified fluids

Rack units

Bare units

Packaged Condensing Units

Condensers / Gas Coolers / Fluid Coolers

Air Coolers

Air-cooled condenser for commercial and industrial refrigeration and air-conditioning applications

- Large capacities
- Outdoor installation
- Single or double row design
- Vertical airflow
- Robust casing
- Optional high-efficiency EC fans and motors
- Reduced footprint due to V-shaped configuration
- Compliant with ErP Directive
- EUROVENT certified



Tenor®	
No. of fans	2 – 20
Capacity	61 – 1915 kW
Refrigerant	R134a, R407A, R407C, R407F, R417A*, R448A, R449A, R450A, R513A

Fluid = Reference fluid (without glide); inlet air temp. = 25°C; condensing temp. = 40°C subcooling 3K
 *Non Eurovent certified fluids

Sirocco™ / CAC (Centrifugal)

Air-cooled condenser for indoor or outdoor applications that require a static pressure

- Small to large sized capacities
- Indoor or outdoor application
- Available static pressure of 0/50/100/150 Pa (Sirocco) and 100/200/300 Pa (CAC)
- Centrifugal fan assembly
- Vertical or horizontal airflow
- Connection for air duct system



Sirocco™ / CAC (Centrifugal)	
No. of fans	1 – 5
Capacity	11 – 530 kW
Refrigerant	R134a, R407A, R407C, R407F, R417A, R448A, R449A, R450A, R513A

Fluid = water; inlet air temp. = 25°C; inlet fluid temp. = 40°C fluid dT=5K

Adagio Fluid Cooler

Air-cooled fluid cooler for commercial and industrial refrigeration and air-conditioning applications

- Small to medium-sized capacities
- Outdoor application
- Single or double row design
- Vertical or horizontal airflow
- Robust casing
- Optional high-efficiency EC fans and motors
- Compliant with ErP Directive
- EUROVENT certified



Adagio Fluid Cooler	
No. of fans	1 – 6
Capacity	10 – 300 kW
Refrigerant	All fluids compatible with copper

Refrigerant = eau ; temp. d'entrée de l'air = 25°C; temp. d'entrée du Refrigerant = 40°C Refrigerant dT=5K

Alto™ Fluid Cooler

Air-cooled fluid cooler for commercial and industrial refrigeration and air-conditioning applications

- Small to medium-sized capacities
- Outdoor installation
- Single or double row design
- Vertical or horizontal airflow
- Robust casing
- Optional high-efficiency EC fans and motors
- Compliant with ErP Directive
- EUROVENT certified



Alto™ Fluid Cooler	
No. of fans	1 - 12
Capacity	90 - 1000 kW
Refrigerant	All fluids compatible with copper

Fluid = water; inlet air temp. = 25°C; inlet fluid temp. = 40°C fluid dT=5K

Tenor[®] Fluid Cooler

Air-cooled fluid cooler for commercial and industrial refrigeration and air-conditioning applications

- Large capacities
- Outdoor installation
- Single or double row design
- Vertical airflow
- Robust casing
- Optional high-efficiency EC fans and motors
- Reduced footprint due to V-shaped configuration
- Compliant with ErP Directive
- EUROVENT certified




Tenor [®] Fluid Cooler	
No. of fans	2 – 20
Capacity	51 – 1804 kW
Refrigerant	All fluids compatible with copper

Fluid = water; inlet air temp. = 25°C; inlet fluid temp. = 40°C fluid dT=5K

Solo™ 25-31 XS

Air cooler for cold room applications

- Compact, ceiling-mounted air cooler
- Designed for refrigerated display cases and small cold rooms
- Aluminium-Magnesium alloy casing
- Axial fans
- Finned coil with copper tubes and aluminium fins
- Optimized for a variety of refrigerants
- Large choice of fan diameter as well as fin spacing
- Optional coil coating, electric defrost and EC fan
- Compliant with ErP Directive
- EUROVENT certified

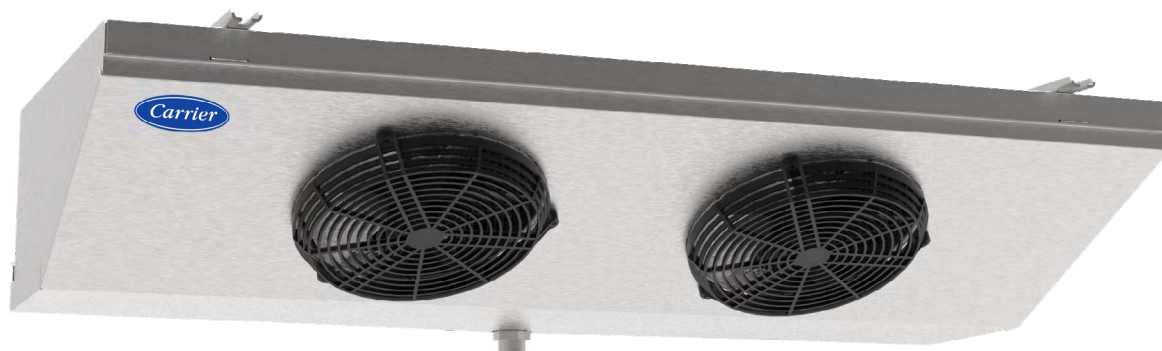

Solo™ 25-31 XS	MT application	LT application
No. of fans	1 – 4	
Refrigeration capacity	1,1 – 8,1 kW	0,7 – 6,3 kW
Refrigerant	R134a, R407F, R407A, R407C, R417A*, R449A, R448A, R513A (MT only) / R450A (MT) / R452A	

Fluid = Reference fluid (without glide); inlet air temp./evaporating temp.: MT = 0°C/-8°C; LT = -18°C/-25°C
 *Non Eurovent certified fluids

Solo™ 25-31-35

MT / LT air cooler for small to medium cold rooms applications

- Ceiling-mounted cubic air cooler
- Designed for all types of cold rooms from small to medium capacities
- Aluminium-Magnesium alloy casing
- Axial fans
- Finned coil with copper tubes and aluminium fins
- Optimized for a variety of refrigerants
- Casing complete with doors and removable pan
- Large choice of fan diameter as well as fin spacing
- Optional coil coating, electric defrost and EC fan
- Compliant with ErP Directive
- EUROVENT certified



Solo™ 25-31-35	MT application	LT application
No. of fans	1 – 5	
Refrigeration capacity	1,4 – 24 kW	0,9 – 15 kW
Refrigerant	R134a (MT only) / R407F / R407A / R407C / R417A* / R449A / R448A / R513A (MT only) / R450A (MT only) / R452A	

Fluid = Reference fluid (without glide); inlet air temp./evaporating temp.: MT = 0°C/-8°C; LT = -18°C/-25°C
 *Non Eurovent certified fluids

CAN/CAB 400-500 Evolution

MT / LT air cooler for small to medium cold rooms applications

- Ceiling-mounted cubic air cooler
- Designed for all types of cold rooms from small to medium capacities
- Large variety of dimensions, fin spacings and air flow configurations to suit cold room requirements
- Direct drive axial propeller fans
- Finned coil with copper tubes and aluminium fins
- Casing complete with doors and pivoting pan
- Variety of options available
- Compliant with ErP Directive
- EUROVENT certified



CAN/CAB 400/500 Evolution	MT application	LT application
No. of fans	1 – 6	
Refrigeration capacity	5,7 – 54 kW	4,4 – 40 kW
Refrigerant	R134a, R407F, R407A, R407C, R417A*, R449A, R448A, R513A, R450A	

Fluid = Reference fluid (without glide); inlet air temp./evaporating temp.: MT = 0°C/-8°C; LT = -18°C/-25°C
 *Non Eurovent certified fluids

Duo™ 31-35

MT / HT air cooler for preparation room applications

- Ceiling-mounted dual-discharge air cooler
- Designed for working areas, such as preparation rooms
- Aluminium-Magnesium alloy casing
- Low air speed for occupied areas
- Axial fans
- Comfortable sound level
- Finned coils with copper tubes and aluminium fins
- Optional coil coating, electric defrost and EC fan
- Compliant with ErP Directive
- EUROVENT certified



Duo™ 31-35	
No. of fans	1 – 6
Refrigeration capacity	2,9 – 25,6 kW
Refrigerant	R134a (MT only) / R407F / R407A / R407C / R417A* / R449A / R448A / R513A (MT only) / R450A (MT only) / R452A

Fluid = Reference fluid (without glide); inlet air temp./evaporating temp.: MT = 10°C/0°C

Solo 50-60-80

MT/LT air cooler for industrial cold rooms applications

- Ceiling-mounted cubic air cooler
- Designed for large capacity refrigeration, storage and freezing applications
- Hinged side covers and drain pan
- Wired fans with quick connectors and wired heaters
- Finned coil with grooved copper tubes and aluminium fins
- Delivered in mounting position (with drain pan)
- Variety of options available
- Compliant with ErP Directive
- EUROVENT certified



Solo 50-60-80	MT application	LT application
No. of fans	1 - 4	
Refrigeration capacity	7 - 128 kW	4 - 90 kW
Refrigerant	R134a, R407F, R407A, R407C, R417A*, R449A, R448A, R513A, R450A	

Fluid = Reference fluid (without glide); inlet air temp./evaporating temp.: MT = 0°C/-8°C; LT = -18°C/-25°C
 *Non Eurovent certified fluids

Duo Evolution

MT air cooler for preparation / process applications

- Ceiling-mounted dual-discharge air cooler
- Designed for refrigerated warehouses, preparation/processing cold rooms
- Low air speed for occupied areas
- Axial fans, configured for optimal air flow
- Comfortable sound level
- Finned coils with grooved copper tubes and aluminium fins
- Specially designed casing for easy cleaning and maintenance access
- Variety of options available, including factory mounted expansion valve
- Compliant with ErP Directive
- EUROVENT certified



Duo Evolution	
No. of fans	1 – 5
Refrigeration capacity	4 – 97 kW
Refrigerant	R134a, R407F, R407A, R407C, R417A*, R449A, R448A, R513A, R450A

Fluid = Reference fluid (without glide); inlet air temp./evaporating temp.: MT = 10°C/0°C
 *Non Eurovent certified fluids

QFC/QFR

MT/LT air cooler for fast freezing applications

- Modular design for floor mounting
- Designed for low temperature blast freezers (QFC) and medium temperature blast chillers (QFR)
- Standard fan pressure = 50 Pa
- Axial fans, configured for optimal air flow
- Finned coils with grooved copper tubes and aluminium fins
- Adjustable unit height according to customer needs
- Variety of options available



QFC/QFR	MT application	LT application
No. of fans		2 – 6
Refrigeration capacity	15 – 77 kW	10 – 53 kW
Refrigerant	Consult us	

Fluid = water; inlet air temp. = 25°C; inlet fluid temp. = 40°C fluid dT=5K Fluid = Reference fluid (without glide); evaporating temp./dT: MT = -8°C/8K; LT= -40°C/6K

Complete & Sustainable Refrigeration Solutions for Food Retailers

Project Planning

- Display cabinets to maximize merchandising opportunities
- Energy and environmental impact consulting and analysis
- Optimal refrigeration technology solutions for each store type
- Complete project design and documentation



Product Development & Manufacturing

- Next-generation display cabinets to help increase sales
- Advanced refrigeration technology and integrated systems
- Energy-efficient solutions for the system lifecycle
- Sustainable natural refrigerant technologies



Lifecycle Care

- Preventative maintenance program
- 24/7 call center and service assistance
- Remote monitoring to ensure optimized performance
- System modernization for improved efficiency

Installation

- Approach tailored to unique customer requirements
- Experienced teams with standard work processes
- A focus on quality throughout the process
- Limited on-site time for minimal business disruption



Carrier Commercial Refrigeration is a leading supplier of high-efficiency turnkey refrigeration systems and services in the food retail industry.

www.carrier-refrigeration.com | www.carrier.com

