

2019

LEAD-ACID BATTERIES

**DELTA**  
BATTERY





## DELTA lead-acid rechargeable batteries

**DELTA** is a brand of reliable lead-acid VRLA batteries (Valve Regulated Lead Acid), presented on the Russian market since 2001. **DELTA** is widely used in telecommunications, security systems, access control, power supply systems for mobile operators' base stations, solar and wind power systems, uninterruptible power supply systems and uninterruptible power supplies, and even motor vehicles.

DELTA batteries are manufactured using AGM and GEL technology and meet all modern requirements of autonomous, uninterruptible and backup power supply systems.

The DELTA product range includes several series optimized for use in various industries and systems.

DELTA batteries received the standard approval of the «Russian Maritime Register of Shipping» in 2016.



**FOR LOW CURRENT SYSTEMS**

**5**  
years

**DT** ..... pages 2-5

**6**  
years

**DTM** ..... pages 6-9

**UNIVERSAL BATTERIES**

10-12  
years

**DTM L** ..... pages 10-13

10-12  
years

**DTM I** ..... pages 14-17

**8**  
years

**HR** ..... pages 18-21

**UPS SERIES**

**8**  
years

**HR-W** ..... pages 22-25

**12**  
years

**HRL-X** ..... pages 26-29

10-12  
years

**GEL** ..... pages 30-33

**SOLAR SERIES**

**15**  
years

**GX** ..... pages 34-37

**SPECIAL PURPOSE**

**10**  
years

**FT-M** ..... pages 38-41

**STARTER BATTERIES**

**CT** ..... pages 42-43

**EPS** ..... pages 44-45


# DT FOR LOW CURRENT SYSTEMS

DELTA lead-acid batteries of DT series are specially designed for use in low current systems and optimized for buffer operation. They are manufactured using AGM technology (Absorbent Glass Mat - an electrolyte absorbed in a fiberglass separator). DELTA DT series batteries have low internal resistance and high energy density. They meet international safety standards and are recommended for use in fire protection systems and access control and management systems.

## Scopes of application:


- Safety systems
- Electronic cash registers
- Electronic test equipment
- Emergency lighting systems
- Geophysical and geodetic equipment
- Control and access systems



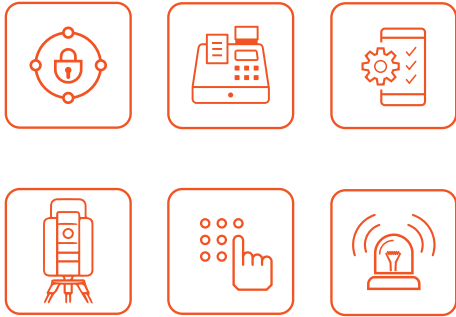

<b>Service life</b>	In buffer mode	up to 40Ah – 5 years, over 65Ah – 7-10 years
	In cyclic mode	up to 40Ah – 1000 cycles at 30% discharge depth, over 65Ah – 1100 cycles at 30% discharge depth.
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,4-2,5 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,27-2,3 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams

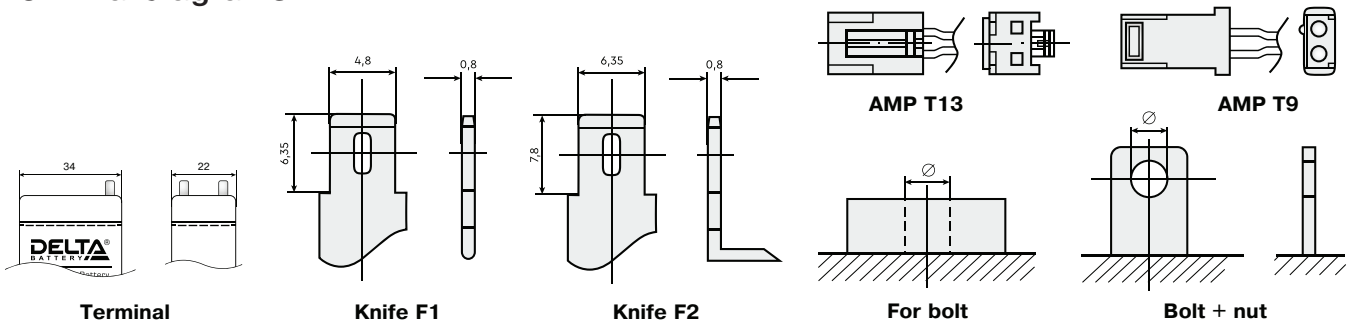

## Terminal diagrams


Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
<b>Material</b>	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## Housing types

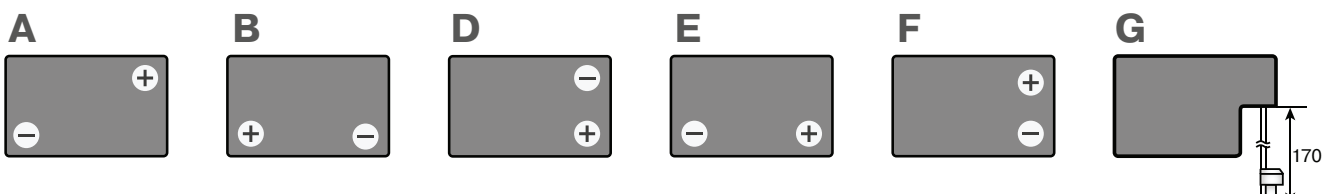





**TEMPERATURE INFLUENCE ON THE CAPACITANCE**

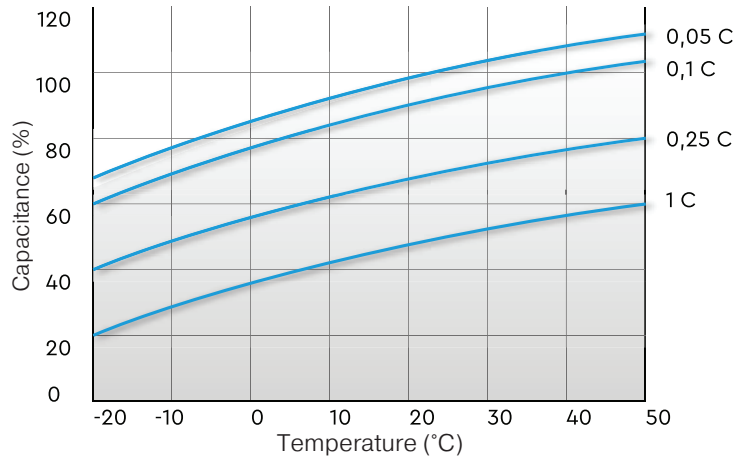


**SERVICE LIFE IN CYCLIC MODE (5 YEARS)**

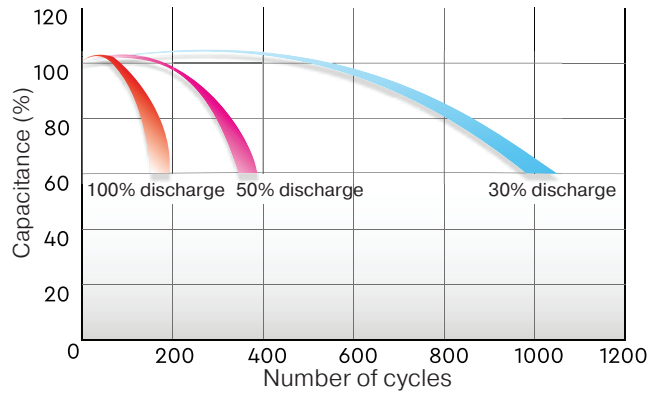

**SERVICE LIFE IN BUFFER MODE (5 YEARS)**

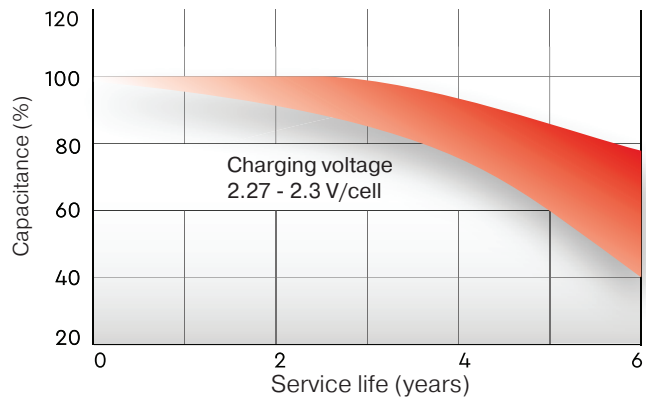


**DISCHARGE CHARACTERISTICS**

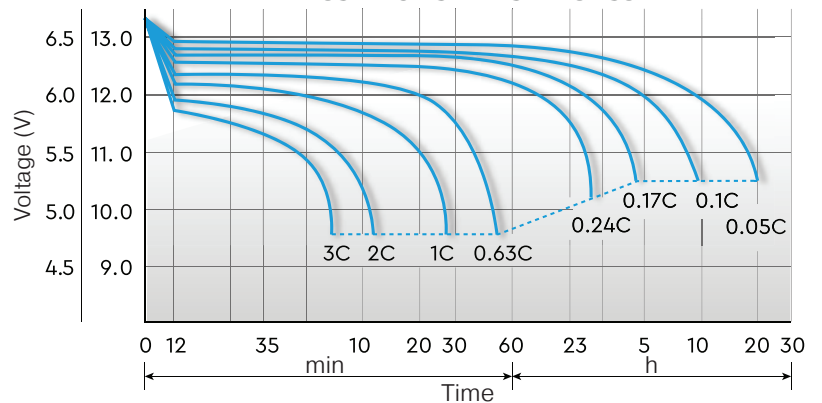




**SERVICE LIFE IN CYCLIC MODE (7-10 YEARS)**

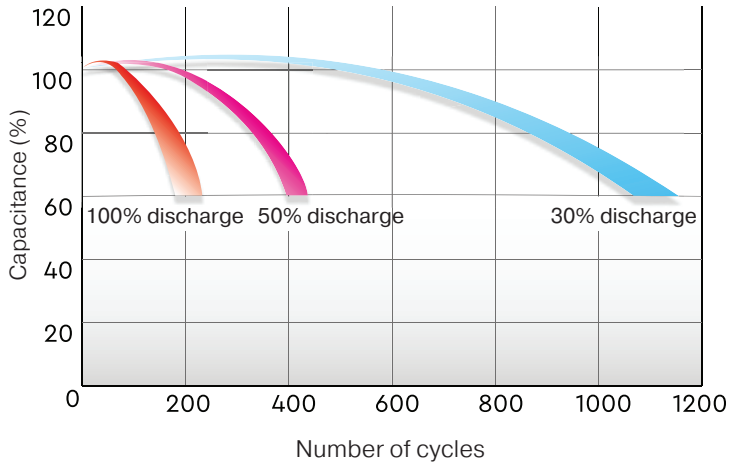

**SERVICE LIFE IN BUFFER MODE (7-10 YEARS)**

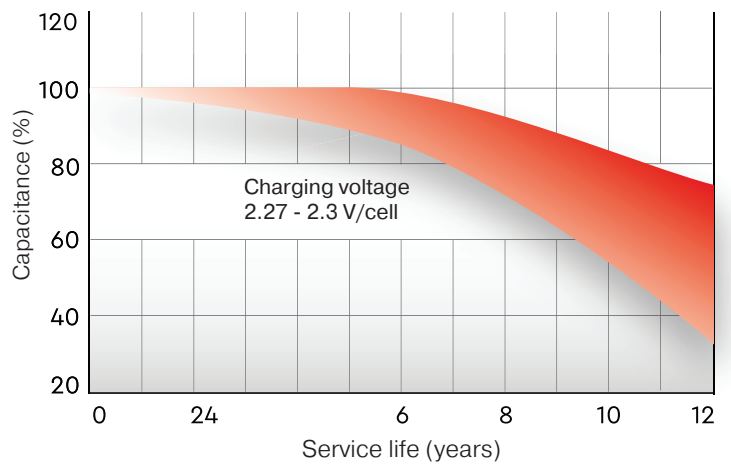

## Standard sizes

Type (Old)	Voltage, V	Capacitance, Ah*	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
DT 401	4	1	35	22	69	0.1	D	Terminal
DT 4035	4	3.5	90	34	66	0.46	B	Knife F1
DT 4045	4	4.5	70	47	105	0.5	A	Knife F1
DT 6012	6	1.2	97	24	58	0.29	B	Knife F1
DT 6015	6	1.5	97	24	58	0.3	B	Knife F1
DT 6023	6	2.3	44	47	107	0.45	A	Knife F1
DT 6028	6	2.8	66	33	99	0.61	A	Knife F1
DT 6033	6	3.3	134	34	66	0.7	B	Knife F1
DT 6033 (125)	6	3.3	125	33	67	0.64	B	Knife F1
DT 6045	6	4.5	70	47	107	0.75	A	Knife F1
DT 606	6	6	70	47	107	0.81	A	Knife F1
DT 612	6	12	151	50	100	1.65	B	Knife F2
DT 12008	12	0.8	97	25	63	0.4	G	AMP
DT 12012	12	1.2	97	43	59	0.58	F	Knife F1
DT 12022	12	2.2	178	35	66	0.97	B	Knife F1
DT 12032	12	3.3	135	67	67	1.35	D	Knife F1
DT 12045	12	4.5	90	70	107	1.55	B	Knife F1
DT 1207	12	7	151	65	102	2.15	D	Knife F1
DT 1212	12	12	151	98	101	3.7	D	Knife F2
DT 1218	12	18	181	76	168	5.2	E	Bolt + nut Ø 4-5.5 mm
DT 1226	12	26	167	175	126	8.1	E	For M5 bolt
DT 1233	12	33	197	131	180	10.1	B	Bolt + nut Ø 6-8 mm
DT 1240	12	40	198	166	170	13.5	E	Bolt + nut Ø 5.5-6 mm
DT 1265	12	65	350	167	179	21	B	For M6 bolt
DT 1275	12	75	259	169	213	22.5	B	For M6 bolt
DT 12100	12	100	329	172	219	29.2	B	For M6 bolt
DT 12120	12	120	410	176	226	32	B	For M6 bolt
DT 12150	12	150	486	171	243	40	B	For M8 bolt
DT 12200	12	200	523	240	224	54	F	For M8 bolt

\*Capacitance is indicated at the 20-hour discharge.

# DTM UNIVERSAL BATTERIES

DELTA lead-acid batteries of the DTM series are sealed, maintenance-free with a gas recombination system (VRLA). They are manufactured using AGM technology (Absorbent Glass Mat - an electrolyte absorbed in a fiberglass separator).

The DTM series is universal and is recommended for use in both buffer and cyclic operation - in various portable devices as well as in stationary systems with back-up power.

## **Scopes of application:**


- Sources of backup power supply
- Uninterruptible power supplies
- Electronic cash registers
- Medical equipment
- Portable and mobile devices
- Different areas of instrumentation
- Control and access systems
- Alarm systems





<b>Service life</b>	In buffer mode	6 years
	In buffer mode	1200 cycles at 30% discharge depth
<b>Self-discharge</b>	Less than 3% per month	
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,25-2,3 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams

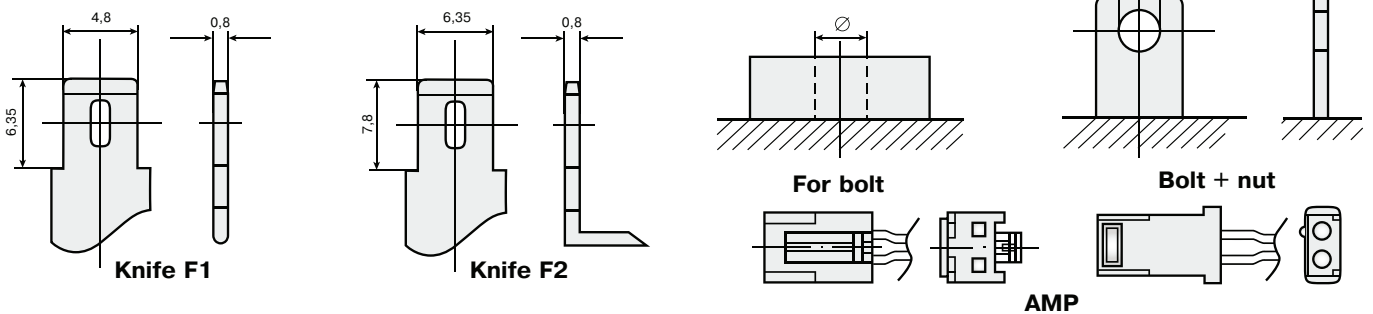

## Terminal diagrams


Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## Housing types

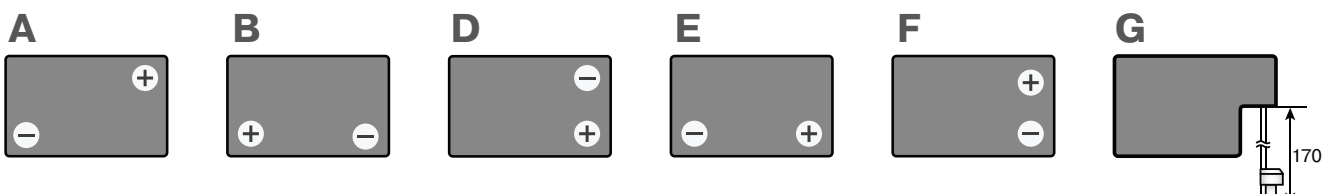





TEMPERATURE INFLUENCE ON THE CAPACITANCE

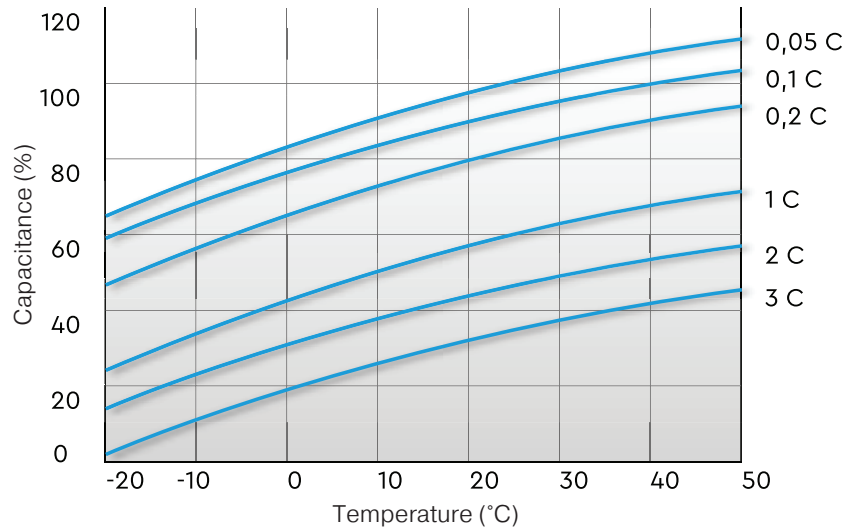

SERVICE LIFE IN CYCLIC MODE

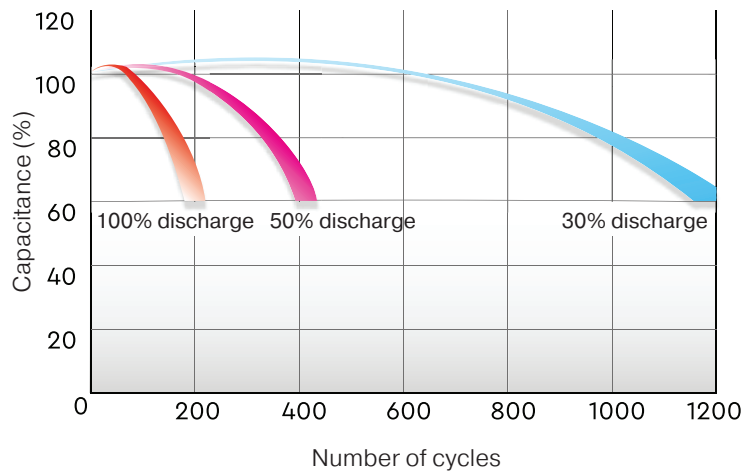

SERVICE LIFE IN BUFFER MODE

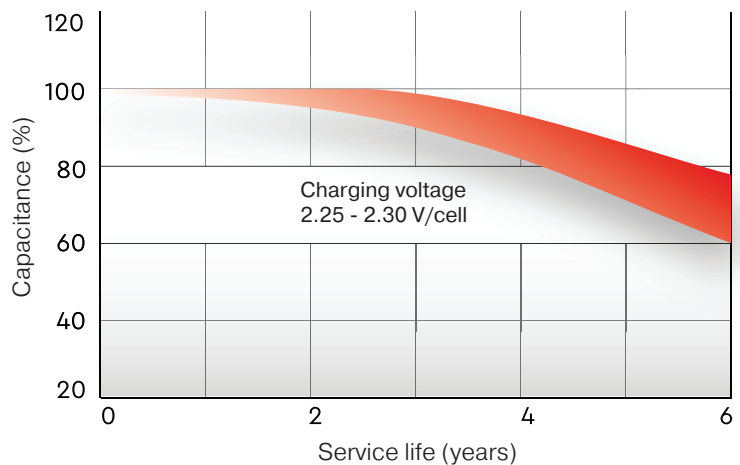



## Standard sizes

Type	Voltage, V	Capacitance, Ah*	Length (±2), mm	Width (±2), mm	Height (±2) max, mm	Weight, kg	Body	Terminal type
DTM 6012	6	1.2	97	24	58	0.31	B	Knife F1
DTM 6032	6	3.2	134	34	67	0.69	B	Knife F1
DTM 6045	6	4.5	70	47	107	0.78	A	Knife F1
DTM 607	6	7	151	34	100	1.2	B	Knife F1
DTM 612	6	12	151	50	100	1.85	B	Knife F1
DTM 12008	12	0.8	96	25	62	0.4	G	AMP
DTM 12012	12	1.2	97	43	58	0.61	F	Knife F1
DTM 12022	12	2.2	178	35	67	1	B	Knife F1
DTM 12032	12	3.2	134	67	67	1.4	F	Knife F1
DTM 12045	12	4.5	90	70	107	1.65	B	Knife F1
DTM 1205	12	5	90	70	107	1.8	B	Knife F1 / Knife F2
DTM 1207	12	7.2	151	65	100	2.4	D	Knife F2
DTM 1209	12	9	151	65	100	2.65	D	Knife F2
DTM 1212	12	12	151	98	101	3.8	D	Knife F2
DTM 1215	12	14.5	151	98	98	4.2	D	Knife F2
DTM 1217	12	17	181	77	167	5.6	E	Bolt + nut Ø 5.5
DTM 1226	12	26	166	175	125	9.2	F	For M5 bolt

\*Capacitance is indicated at the 20-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	5 min	15 min	30 min	1 hour	3 hours	5 hours	5 min	15 min	30 min	1 hour	3 hours	5 hours
DTM 6012	4.36	2.27	1.31	0.75	0.35	0.21	6.93	4.33	2.50	1.47	0.65	0.48
DTM 6032	11.6	5.55	3.40	1.94	0.83	0.59	20.2	10.6	6.44	3.75w	1.72	1.19
DTM 6045	14.3	8.19	4.41	2.83	1.16	0.74	28.0	15.5	8.69	5.30	2.34	1.53
DTM 607	25.5	13.4	7.70	4.57	1.75	1.25	50.0	26.7	15.3	9.12	3.50	2.20
DTM612	34.0	18.2	9.82	6.11	2.55	1.80	65.2	35.6	21.2	12.5	5.05	3.61
DTM 12008	3.08	1.44	0.88	0.5	0.21	0.14	5.48	2.66	1.64	0.95	0.40	0.27
DTM 12012	5.12	2.43	1.36	0.83	0.36	0.24	8.67	4.58	2.64	1.64	0.69	0.47
DTM 12022	8.27	4.13	2.29	1.29	0.54	0.39	16.0	7.86	4.28	2.28	0.98	0.73
DTM 12032	11.5	5.5	3.36	1.92	0.82	0.58	20.0	10.4	6.38	3.71	1.63	1.15
DTM 12045	13.6	7.97	4.25	2.74	1.12	0.71	26.6	15.2	8.28	4.77	2.23	1.41
DTM 1205	18.8	9.10	5.05	3.01	1.30	0.88	30.7	16.4	9.10	5.80	2.49	1.74
DTM 1207	26.0	13.6	7.62	4.22	1.74	1.17	46.9	25.4	14.0	8.23	3.40	2.25
DTM1209	42.8	15.8	9.36	5.56	2.12	1.45	74.8	30.1	17.9	11.0	4.13	2.80
DTM 1212	57.1	26.3	14.2	7.63	2.76	1.79	94.0	51.7	28.3	15.0	5.47	3.57
DTM 1215	58.8	28.3	16.4	8.52	3.0	2.11	107	54.0	29.6	15.8	5.85	4.10
DTM 1217	62.2	32.6	19.3	11.6	4.5	3.00	110	58.5	35.0	21.5	8.92	5.99
DTM 1226	98.3	47.3	28.5	15.7	7.10	4.64	173	85.8	52.9	31.0	12.9	8.18

# DTM L UNIVERSAL BATTERIES

DELTA lead-acid batteries of the DTM L series are sealed, maintenance-free with a gas recombination system (VRLA). They are manufactured using AGM technology (Absorbent Glass Mat - an electrolyte absorbed in a fiberglass separator).


The DTM L Series belongs to the Long Life range with a lifetime of up to 12 years. Due to their wide range and high performance characteristics, they are recommended for use in various uninterruptible power supply systems, including devices and equipment that require power quality (circulation and

submersible pumps and boilers of heating systems), emergency power supply, and other electrical devices.

**Scopes of application:**


- Sources of backup power supply
- Uninterruptible power supplies
- Medical equipment
- Wheelchairs
- Pumps, boilers of heating systems
- Solar and wind power systems

# DTM L

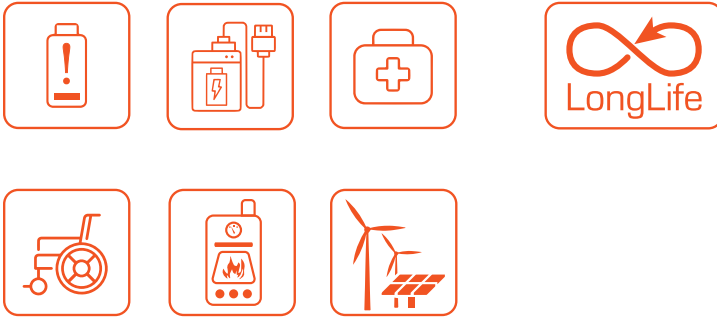

<b>Service life</b>	In buffer mode	10-12 years
	In buffer mode	1250 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,25-2,3 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams



## Terminal diagrams

Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


## Housing types

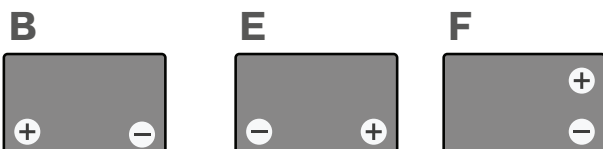







TEMPERATURE INFLUENCE ON THE CAPACITANCE

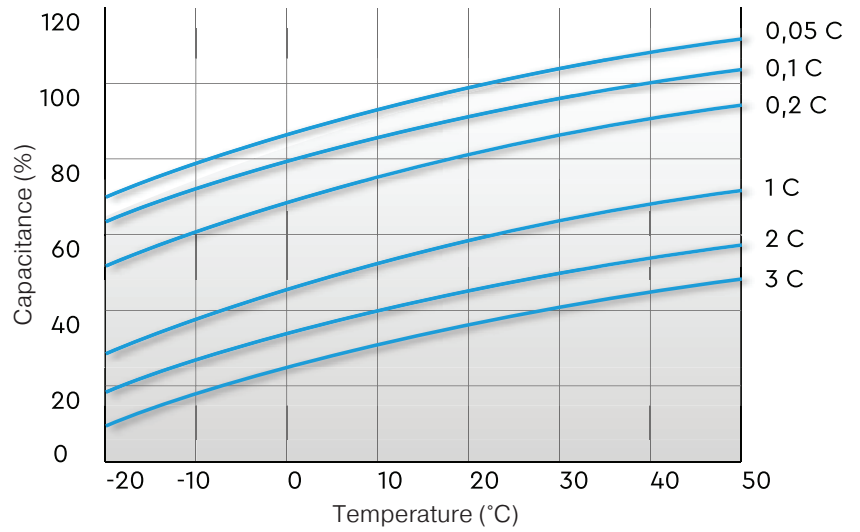

SERVICE LIFE IN CYCLIC MODE

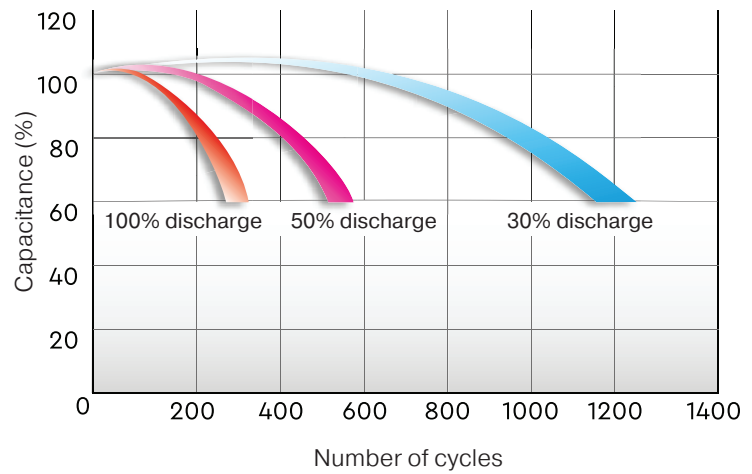

SERVICE LIFE IN BUFFER MODE

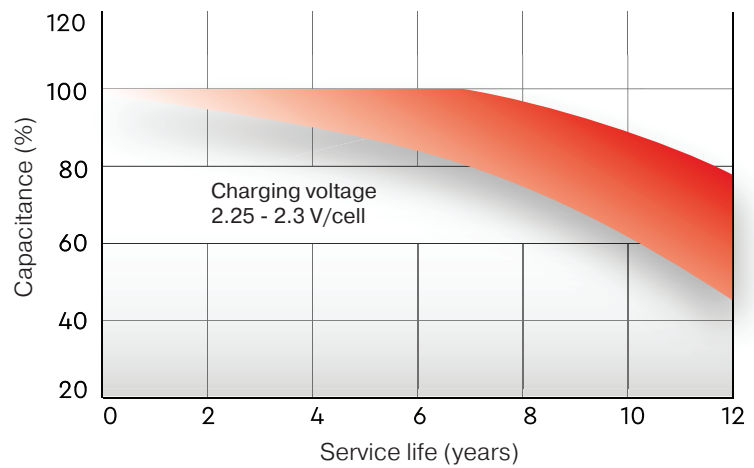

## Standard sizes

Type	Voltage, B	Capacitance*, Ah	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
DTM 1233 L	12	33	195	130	168	10.1	B	For M6 bolt
DTM 1240 L	12	40	198	166	170	14	E	For M6 bolt
DTM 1255 L	12	55	239	132	210	16.2	B	For M6 bolt
DTM 1265 L	12	65	350	167	179	22.4	B	For M6 bolt
DTM 1275 L	12	75	258	166	215	23	B	For M6 bolt
DTM 1290 L	12	90	306	169	216	27	B	For M6 bolt
DTM 12100 L	12	100	330	171	220	29	B	For M6 bolt
DTM 12120 L	12	120	410	176	224	34	B	For M8 bolt
DTM 12150 L	12	150	482	170	240	45	B	For M8 bolt
DTM 12200 L	12	200	522	238	223	59	F	For M8 bolt
DTM 12230 L	12	230	520	269	208	72.6	F	For M8 bolt
DTM 12250 L	12	250	520	269	227	74	F	For M8 bolt

\*Capacitance is indicated at the 10-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	10 min	15 min	30 min	1 hour	3 hours	5 hours	10 min	15 min	30 min	1 hour	3 hours	5 hours
DTM 1233 L	64.8	51.4	30.4	21.2	8.45	6.15	119	95.7	60.0	39.9	16.8	11.5
DTM 1240 L	77.8	64.5	37.3	24.2	9.89	6.97	144	117	76.3	48.3	20.3	13.6
DTM 1255 L	115	90.6	55.6	33.3	13.9	9.40	213	169	107	65.8	27.9	18.2
DTM 1265 L	138	110	64.3	41.0	16.1	11.0	243	190	117	75.3	32.4	21.8
DTM 1275 L	158	122	77.0	46.9	21.0	13.9	290	237	145	89.8	38.9	26.0
DTM 1290 L	183	145	86.4	51.3	23.0	15.7	350	281	163	99.0	45.1	30.9
DTM12100L	185	153	90.6	58.6	26.2	17.3	354	297	173	109	48.9	33.7
DTM 12120 L	231	193	110	71.3	28.7	19.7	414	343	211	143	56.6	40.2
DTM 12150 L	303	254	167	94.1	39.3	25.3	560	470	308	178	75.2	51.0
DTM 12200 L	400	337	206	120	55.0	36.6	704	586	382	221	105	71.2
DTM 12230 L	436	365	240	150	67.8	44.9	809	666	462	291	129	86.1
DTM 12250 L	517	436	265	158	72.0	47.0	898	784	488	299	138	91.0

# DTM I FOR LOW CURRENT SYSTEMS

DELTA sealed lead-acid batteries of the DTM I series are manufactured according to AGM technology (electrolyte absorbed in a fiberglass separator), equipped with an LCD display showing the battery operation status. The DTM I series belongs to the Long Life range with a lifetime of up to 12 years, with the possibility of increasing it by 15-30% by a single replenishment (refilling) of a specialized component solution.

They are recommended for use in uninterruptible power supplies, electromedical equipment, wheelchairs, heating system boilers and pumps, etc.

#### **Scopes of application:**

- Uninterruptible power supplies
- Sources of backup power supply
- Medical equipment
- Operating current cabinets
- Electromedical equipment, wheelchairs
- Heating and water supply systems




# DTM I



<b>Service life</b>	In buffer mode	10-12 years
	In buffer mode	1250 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,25-2,3 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams



## Terminal diagrams


Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## Housing types

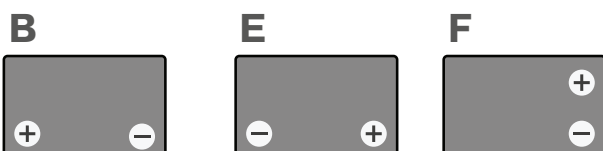





TEMPERATURE INFLUENCE ON THE CAPACITANCE

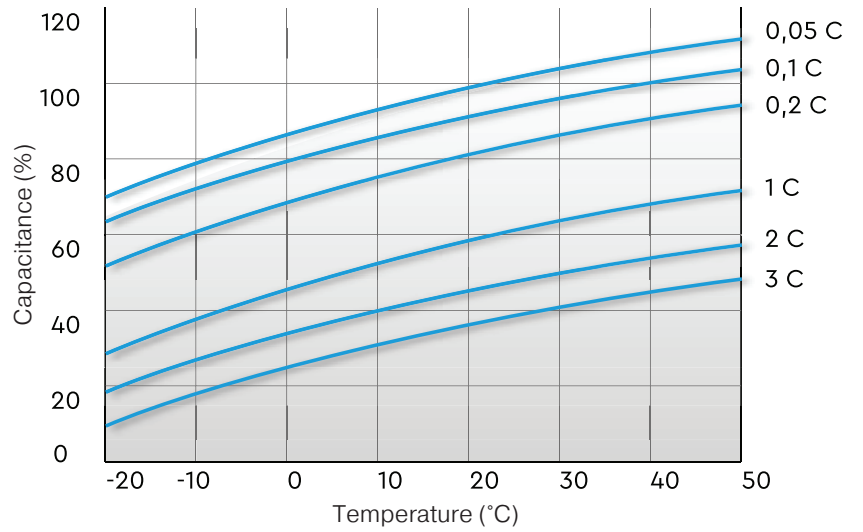

SERVICE LIFE IN CYCLIC MODE

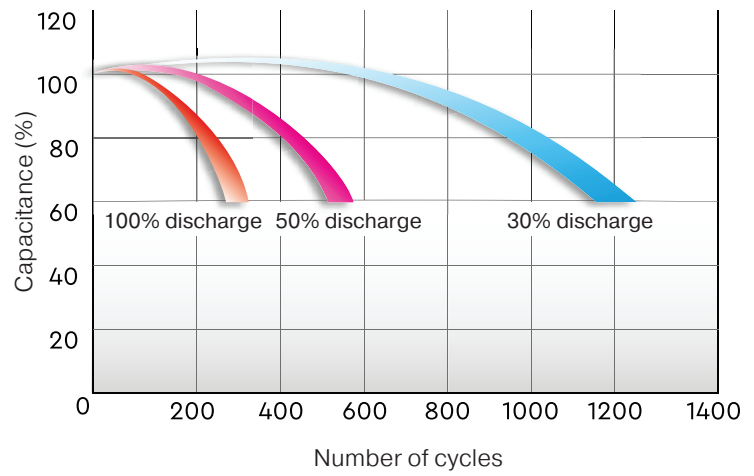

SERVICE LIFE IN BUFFER MODE

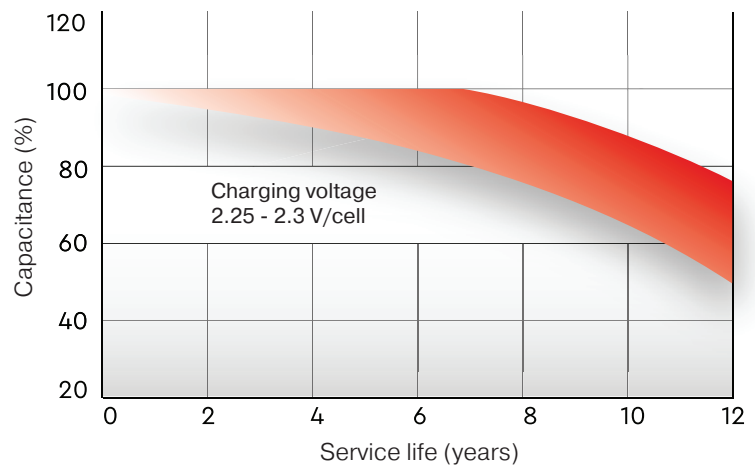

## Standard sizes

Type	Voltage, B	Capacitance*, Ah	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
DTM 1233 I	12	33	194	132	168	10	B	For M6 bolt
DTM 1240 I	12	40	196	166	173	12.8	E	For M6 bolt
DTM 1255 I	12	55	228	137	214	15.6	B	For M6 bolt
DTM 1265 I	12	65**	350	167	173	20.9	E	For M6 bolt
DTM 1275 I	12	75	260	168	219	21.7	B	For M6 bolt
DTM 12100 I	12	100**	333	173	222	31.5	B	For M6/M8 bolt
DTM 12120 I	12	120**	406	172	228	37.4	B	For M8 bolt
DTM 12150 I	12	150**	484	170	241	43.2	B	For M8 bolt
DTM 12200 I	12	200**	522	239	222	61	E	For M8 bolt
DTM 12250 I	12	250**	520	269	225	72	F	For M8 bolt

\*Capacitance is indicated at the 20-hour discharge.

\*\*Capacitance is indicated at the 10-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1,75 V/cell, A, at t 25°C.						Discharge with constant power up to 1,75 V/cell, W/cell, at t 25°C					
	10 min	15 min	30 min	1 hour	3 hours	5 hours	10 min	15 min	30 min	1 hour	3 hours	5 hours
DTM 1233 I	59.6	47.0	28.9	19.0	8.20	5.50	111	90.5	56.9	39.0	15.7	11.1
DTM 1240 I	73.4	58.5	37.0	22.4	9.70	6.80	135	111	72.7	45.1	19.6	13.2
DTM 1255 I	103.5	84.3	51.9	31.5	13.4	9.20	193	156	101	62.0	26.5	17.5
DTM 1265 I	124	104	61.0	38.5	15.4	10.6	224	182	111.8	72.2	31.2	21.2
DTM 1275 I	131	105	66.0	39.7	17.0	12.0	246	201	129	79.0	35.0	24.8
DTM12100 I	169.7	140	85.9	56.5	25.4	16.5	335	279	166	106	47.8	32.4
DTM 12120 I	213	181	104	67.9	27.5	18.9	386	324	201	137	55.2	39.3
DTM 12150 I	278	234	149	87.6	38.3	25.7	527	444	292	171	72.1	49.2
DTM 12200 I	375	314	196	115	52.7	35.9	668	566	366	213	99.0	68.4
DTM 12250 I	476	377	243	149	60.9	43.2	824	725	462	287	124	86.4




# HR UPS SERIES

DELTA lead-acid batteries of the HR series are sealed, maintenance-free with a gas recombination system (VRLA). They are manufactured using AGM technology (Absorbent Glass Mat - an electrolyte absorbed in a fiberglass separator). Thanks to this technology, the batteries have excellent discharge characteristics.

The HR series belongs to the DELTA UPS series, designed specifically for use in uninterruptible power supplies. Data center, in communication systems and other equipment.


## Scopes of application:

- Sources of backup power supply
- Uninterruptible power supplies
- Medical equipment
- Different areas of instrumentation
- Solar and wind power systems



<b>Service life</b>	In buffer mode	up to 26 Ah inclusive – 8 years Delta HR 12-40, HR 12-65, HR 12-100 – 10-12 years old
	In cyclic mode	Up to 26Ah inclusive – 1200 cycles at 30% discharge depth. Delta HR 12-40, HR 12-65, HR 12-100 – 1300 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,25-2,3 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams

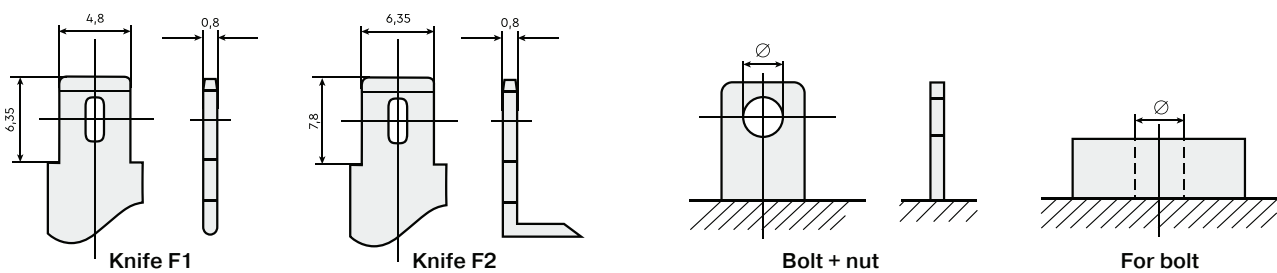

## Terminal diagrams


Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## Housing types

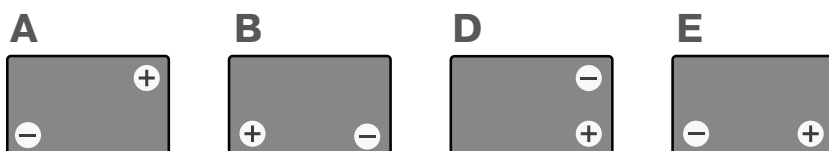





**TEMPERATURE INFLUENCE ON THE CAPACITANCE**

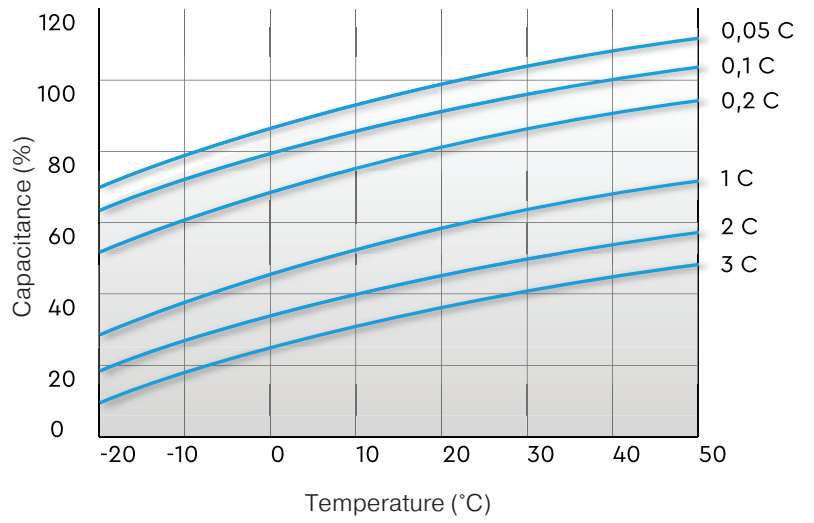

**SERVICE LIFE IN CYCLIC MODE (5 YEARS)**

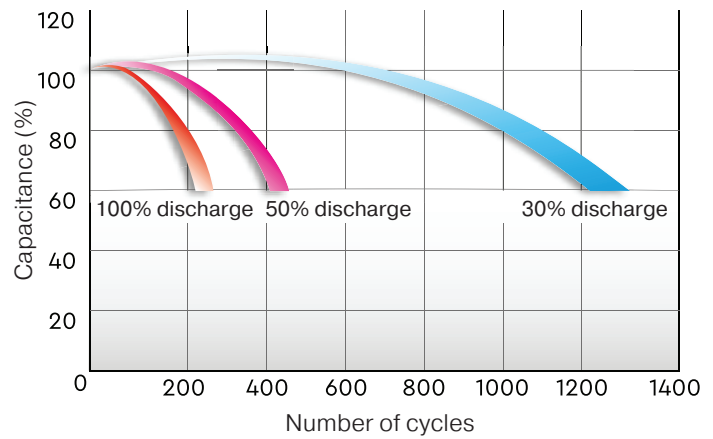


**SERVICE LIFE IN BUFFER MODE (8 YEARS)**

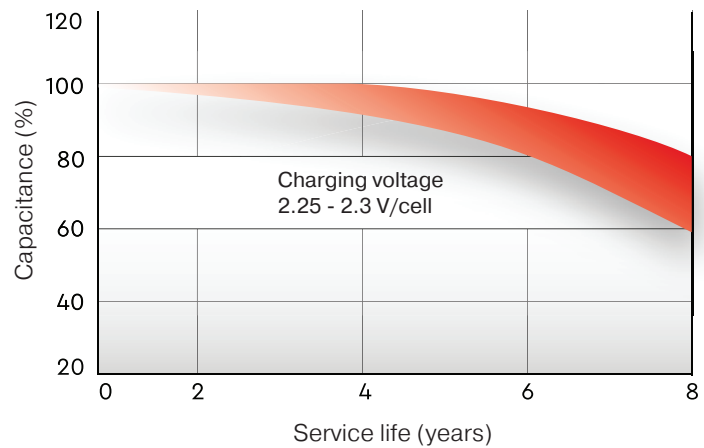




**SERVICE LIFE IN CYCLIC MODE (10 YEARS)**

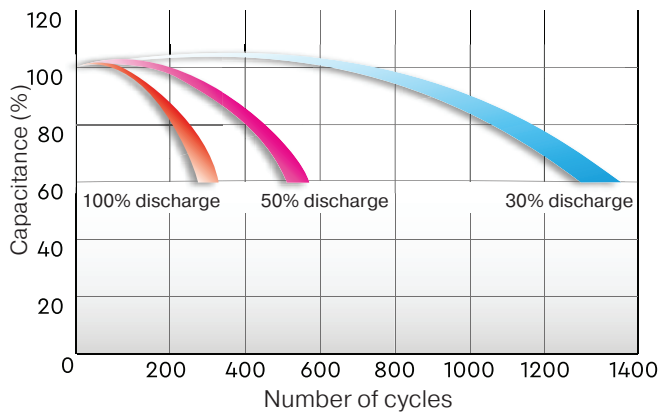

**SERVICE LIFE IN BUFFER MODE (10 YEARS)**

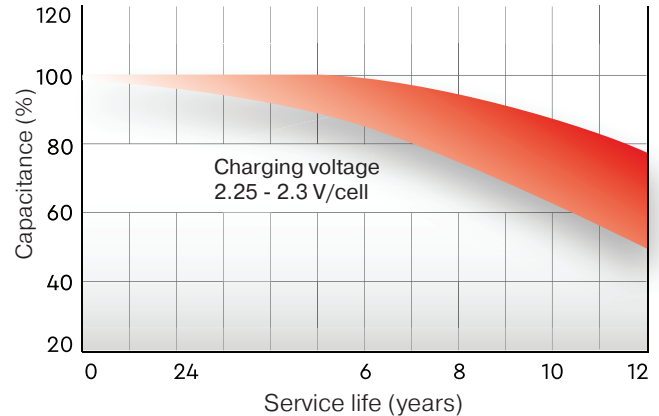

## Standard sizes

Type	Voltage, V	Capacitance, Ah*	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
HR 6-4.5	6	4.5	70	47	107	0.85	A	Knife F1
HR 6-7.2	6	7.2	151	34	100	1.36	B	Knife F1
HR 6-9	6	8.8	151	34	100	1.37	B	Knife F1
HR 6-12	6	12	151	50	100	1.95	B	Knife F1
HR 6-15	6	15	151	50	100	1.95	B	Knife F1
HR 12-4.5	12	4.5	90	70	107	1.75	B	Knife F1
HR 12-5	12	5	90	70	107	1.8	B	Knife F1
HR 12-5.8	12	5.4	90	70	107	1.95	B	Knife F1
HR 12-7.2	12	7.2	151	65	100	2.5	D	Knife F2
HR 12-9	12	9	151	65	100	2.78	D	Knife F2
HR 12-12	12	12	151	98	101	3.9	D	Knife F2
HR 12-15	12	15	151	98	101	4.6	D	Knife F2
HR 12-18	12	18	181	77	167	6.1	E	Bolt + nut Ø 5.5 mm
HR 12-26	12	26**	165	125	175	9.3	E	For M5 bolt
HR 12-40	12	45**	198	166	170	14.8	E	For M6 bolt
HR 12-65	12	65**	350	167	179	23.4	B	For M6 bolt
HR 12-100	12	100**	330	171	220	32	B	For M6 bolt

\*Capacitance is indicated at the 20-hour discharge.

\*\*Capacitance is indicated at the 10-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	5 min	15 min	30 min	1 hour	3 hours	5 hours	5 min	15 min	30 min	1 hour	3 hours	5 hours
HR 6-4.5	15.7	9.01	4.85	3.12	1.28	0.81	29.2	16.6	9.89	6.09	2.46	1.67
HR 6-7.2	25.5	13.4	7.70	4.57	1.75	1.25	50.0	26.7	15.3	9.11	3.50	2.20
HR 6-9	33.0	15.5	9.70	5.68	2.25	1.52	64.9	35.6	20.2	11.4	4.46	2.90
HR 6-12	44.7	22.8	12.4	7.22	3.10	2.08	77.1	42.5	24.5	14.4	6.22	4.10
HR 6-15	62.3	30.0	17.4	8.78	3.09	2.17	81.7	45.1	26.0	14.8	6.41	4.22
HR 12-4.5	19.7	10.0	5.41	3.33	1.35	0.88	36.7	16.4	9.56	5.84	2.55	1.68
HR 12-5	24.3	11.9	6.62	3.93	1.48	0.97	44.8	22.0	12.6	7.60	2.93	1.95
HR 12-5.8	25.0	12.8	7.06	4.07	1.62	1.02	49.1	24.9	14.1	8.10	3.26	1.99
HR 12-7.2	26.8	13.9	7.86	4.44	1.76	1.20	50.4	25.9	14.3	8.53	3.49	2.30
HR 12-9	33.1	17.7	10.5	6.18	2.46	1.59	66.9	32.9	20.0	11.5	4.74	3.21
HR 12-12	43.5	23.7	13.3	7.94	3.12	2.07	81.9	45.3	26.2	15.8	6.37	4.14
HR 12-15	63.9	31.9	18.6	10.6	4.04	5.22	113	58.3	34.5	19.2	7.42	4.58
HR 12-18	69.3	36.7	21.0	12.6	5.04	3.37	138	78.7	43.3	26.0	10.1	6.88
HR 12-26	100	51.0	30.9	19.2	7.86	4.95	183	95.3	58.2	35.7	15.9	10.0
HR 12-40	134	73.0	43.9	27.2	11.3	7.52	232	135	83.8	54.0	22.5	14.7
HR 12-65	191	114	66.3	41.5	16.9	11.5	337	197	118	77.2	33.7	22.4
HR 12-100	281	164	96.0	61.5	27.2	18.0	508	299	183	114	50.9	35.0

# HR-W UPS SERIES

DELTA lead-acid batteries of the HR-W series are sealed, maintenance-free with a gas recombination system (VRLA). They are manufactured using AGM technology (Absorbent Glass Mat - an electrolyte absorbed in a fiberglass separator).

The HRL-W series is part of DELTA UPS series designed specifically for use in uninterruptible power supplies to data centers, communication systems, and other equipment. The HR-W series has improved energy efficiency due to thicker plates and a modified lead grating structure.

## Scopes of application:


- Sources of backup power supply
- Uninterruptible power supplies
- Medical equipment
- Different areas of instrumentation
- Solar and wind power systems

# HR-W



<b>Service life</b>	In buffer mode	8 years
	In buffer mode	1200 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,25-2,3 V/cell Temperature compensation - 3.3 mV/cell°C

## Terminal diagrams

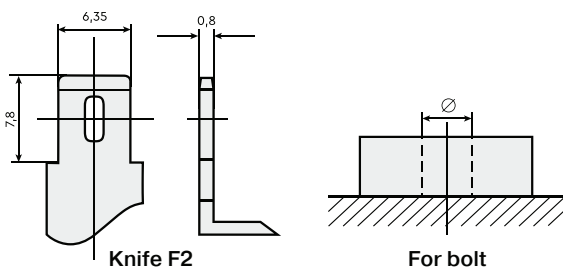

## Terminal diagrams

Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


## Housing types









TEMPERATURE INFLUENCE ON THE CAPACITANCE

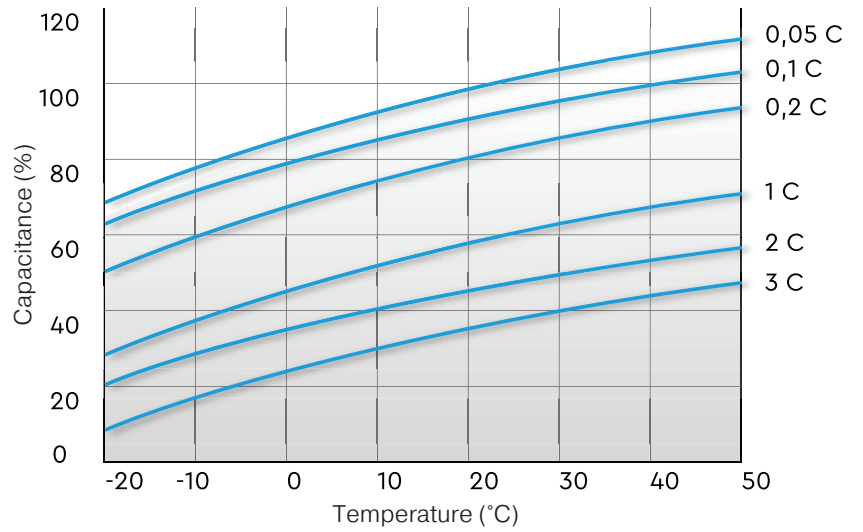

SERVICE LIFE IN CYCLIC MODE

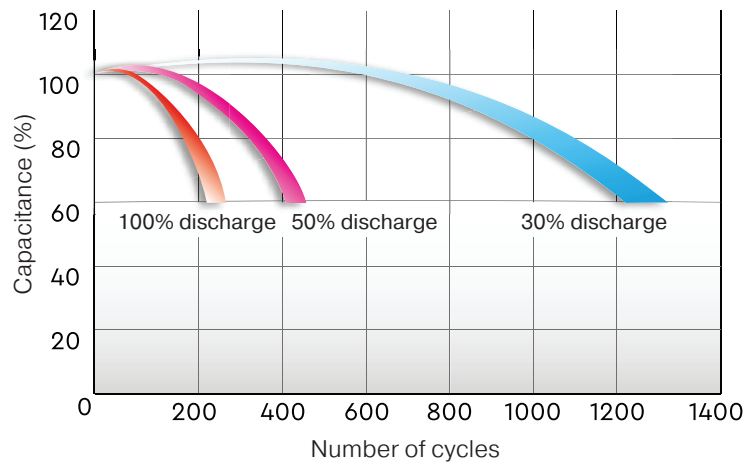

SERVICE LIFE IN BUFFER MODE

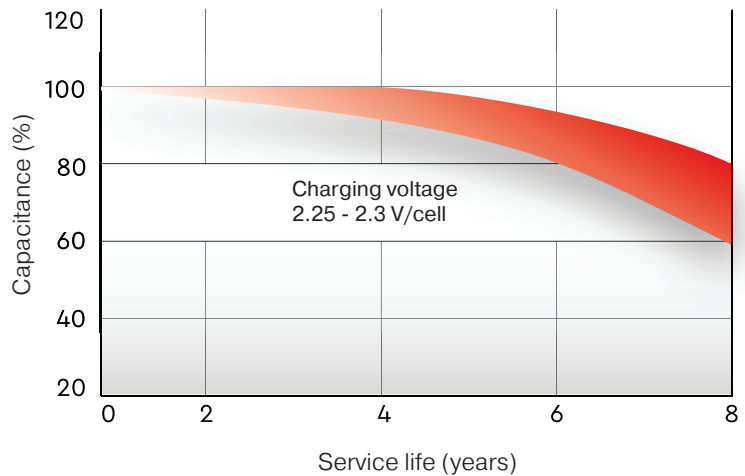

# HR-W

## Standard sizes

Type	Voltage, V	Capacitance, Ah*	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
HR 12-21 W	12	5	90	70	107	1.8	B	Knife F2
HR 12-24 W	12	6	151	52	99	2.18	D	Knife F2
HR 12-28 W	12	7	151	65	100	2.2	D	Knife F2
HR 12-34 W	12	9	151	65	100	2.62	D	Knife F2
HR 12-51 W	12	12	151	98	101	3.9	D	Knife F2
HR 12-80 W	12	20	181	76	166	6.5	E	For M5 bolt

\*Capacitance is indicated at the 20-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	5 min	15 min	30 min	1 hour	2 hours	3 hours	5 min	15 min	30 min	1 hour	2 hours	3 hours
HR 12-21 W	26.1	12.7	7.24	4.21	2.32	1.68	47.0	24.5	14.2	8.50	4.67	3.37
HR 12-24 W	28.7	15.0	8.51	4.68	2.65	1.94	53.0	27.1	15.8	8.90	5.39	4.06
HR 12-28 W	33.8	15.84	9.12	4.82	2.92	2.22	56.9	28.8	16.1	9.12	5.61	4.29
HR 12-34 W	37.0	18.1	9.9	5.61	3.47	2.73	68.1	34.1	19.3	10.9	6.77	5.35
HR 12-51 W	48.5	25.6	15.1	8.01	4.81	3.71	86.0	48.0	27.3	15.8	9.49	7.34
HR 12-80 W	87.0	48.9	27.7	15.2	8.35	6.04	164	83.5	50.1	28.5	15.8	11.4

# HRL-X UPS SERIES

DELTA lead-acid batteries of the HRL-X series are sealed, maintenance-free with a gas recombination system (VRLA). They are manufactured using AGM technology (Absorbent Glass Mat - an electrolyte absorbed in a fiberglass separator). Thanks to optimized technology, the batteries have excellent discharge characteristics over the entire time interval range.

The HRL-X series is part of the DELTA UPS series designed specifically for use in uninterruptible power supplies to data centers, servers, communication systems, and other equipment. The series is highly reliable and has a service life of up to 12 years.

## Scopes of application:

- Sources of backup power supply
- Uninterruptible power supplies
- Energy facilities
- Communication facilities
- Solar and wind power systems




# HRL-X



<b>Service life</b>	In buffer mode	12 years
	In buffer mode	1300 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,25-2,3 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams

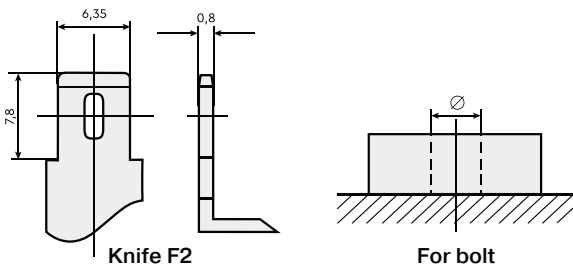

## Terminal diagrams


Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
<b>Material</b>	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## Housing types

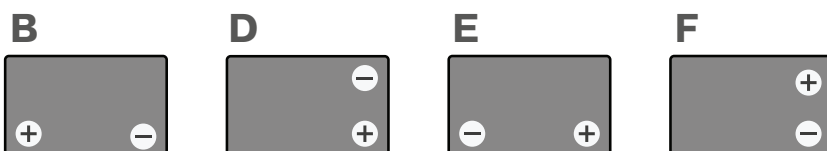





TEMPERATURE INFLUENCE ON THE CAPACITANCE

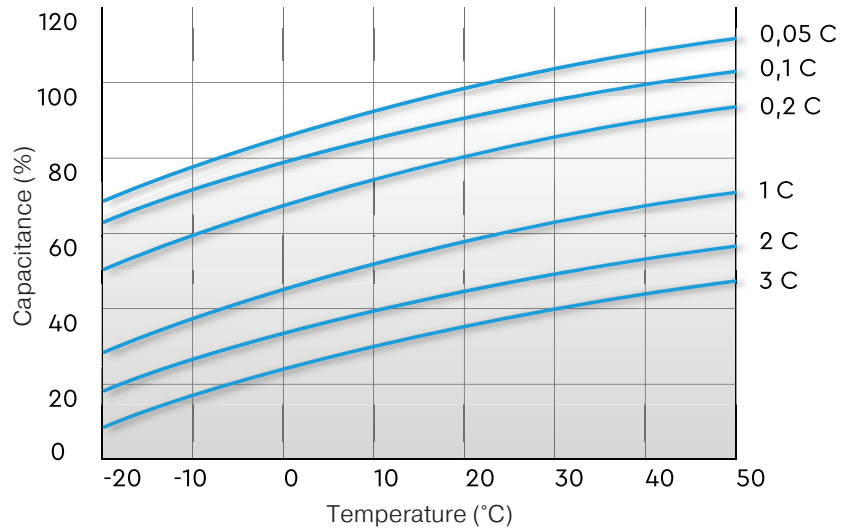

SERVICE LIFE IN CYCLIC MODE

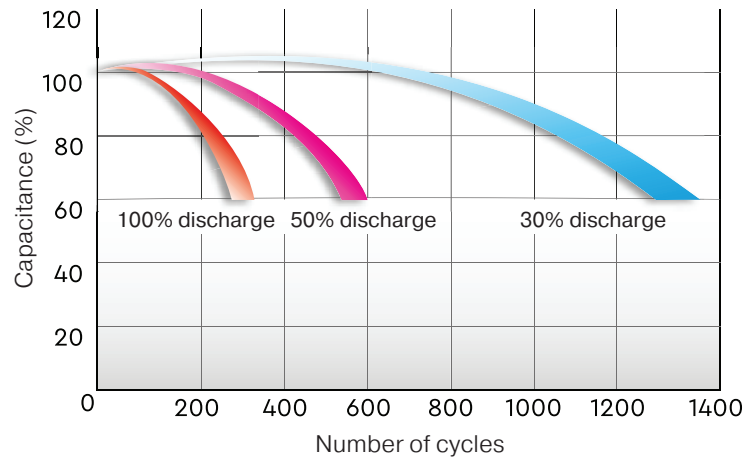

SERVICE LIFE IN BUFFER MODE

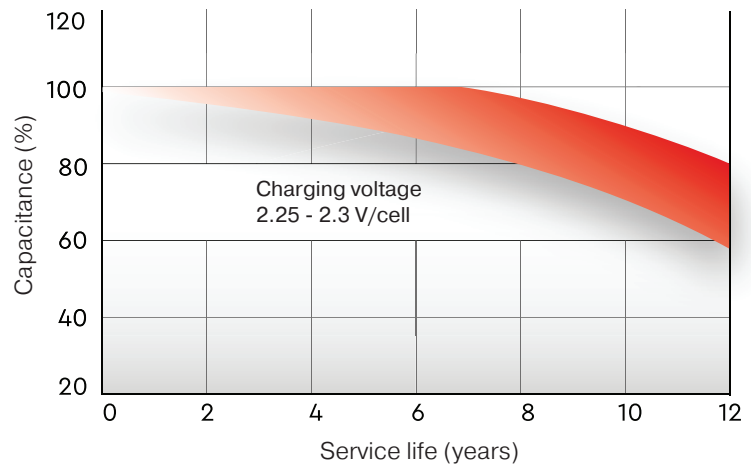

# HRL-X

## Standard sizes

Type	Voltage, V	Capacitance, Ah*	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
HRL 12-7.2 X	12	7.2	151	65	100	2.6	D	Knife F2
HRL 12-9 X (1234W)	12	9	151	65	100	2.65	D	Knife F2
HRL 12-12 X	12	12	151	98	101	4	D	Knife F2
HRL 12-18 X	12	17.8	181	77	167	6.2	E	For M5 bolt
HRL 12-26 X	12	28	165	125	175	9.7	E	For M5 bolt
HRL 12-33 X	12	33	195	130	168	11.5	B	For M6 bolt
HRL 12-45 X	12	45	198	166	170	14.8	E	For M6 bolt
HRL 12-55 X	12	55	229	138	213	19	B	For M6 bolt
HRL 12-65 X	12	65	350	167	179	23.4	B	For M6 bolt
HRL 12-75 X	12	75	258	166	215	24	B	For M6 bolt
HRL 12-80 X	12	80	350	167	179	24.2	B	For M6 bolt
HRL 12-90 X	12	90	306	169	215	28	B	For M6 bolt
HRL 12-100 X	12	100	330	171	220	33	B	For M6 bolt
HRL 12-140 X	12	140	342	173	287	41.5	B	For M8 bolt
HRL 12-180 X	12	180	522	238	223	62	F	For M8 bolt

\*Capacitance is indicated at the 10-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	5 min	15 min	30 min	1 hour	3 hours	5 hours	5 min	15 min	30 min	1 hour	3 hours	5 hours
HRL 12-7.2 X	25.4	13.9	7.86	4.44	1.76	1.20	46.2	25.9	14.3	8.53	3.49	2.30
HRL 12-9 X (1234W)	30.9	16.1	9.36	5.71	2.25	1.55	64.8	31.1	18.5	11.0	4.20	2.98
HRL 12-12 X	42.6	23.2	13.1	7.86	3.09	2.07	80.3	44.4	25.9	15.6	6.31	4.10
HRL 12-18 X	71.7	38.0	21.7	13.1	5.23	3.50	142	80.2	43.9	26.4	10.4	6.94
HRL 12-26 X	99.1	54.8	32.7	21.2	8.66	5.37	184	101	60.0	36.6	17.0	11.0
HRL 12-33 X	103	56.7	34.5	21.1	8.79	6.40	187	111	67.1	41.5	17.5	12.0
HRL 12-45 X	139	76.9	46.1	27.9	11.9	8.16	256	143	84.5	55.9	22.6	15.6
HRL 12-55 X	155	90.6	55.6	33.3	13.9	9.40	281	169	107	65.8	27.9	18.2
HRL 12-65 X	191	114	66.3	41.5	16.9	11.5	337	197	118	77.2	33.7	22.4
HRL 12-75 X	205	125	80.7	48.6	18.6	12.3	396	230	143	89.0	35.4	23.8
HRL 12-80 X	258	161	99.3	58.2	22.0	15.3	462	286	177	103	39.5	28.7
HRL 12-90 X	266	172	106	61.7	25.0	16.6	485	309	197	115	48.5	32.7
HRL 12-100 X	328	199	124	71.4	26.9	18.1	551	351	227	133	51.9	35.4
HRL 12-140 X	387	231	142	82.1	36.8	24.3	686	427	258	154	69.5	45.9
HRL 12-180 X	488	276	188	124	56.7	37.9	850	507	349	235	109	73.5



# GEL

## SPECIAL PURPOSE SERIES, GEL TECHNOLOGY


DELTA sealed lead-acid batteries of GEL series are manufactured according to AGM+GEL technology: combined AGM and GEL technology. DELTA batteries of GEL series (from 33 Ah) are equipped with an integrated controller and an LCD display showing the battery operation status. There are additional containers with a special solution under the battery cover, which can be refilled to extend the life of the battery by 15-30%.

Recommended for use in autonomous power systems, in alternative energy systems.

### Scopes of application:


- Uninterruptible power supplies
- Communication and telecommunication systems
- Solar and wind power systems
- Autonomous power supply systems
- Electromedical equipment, wheelchairs

# GEL

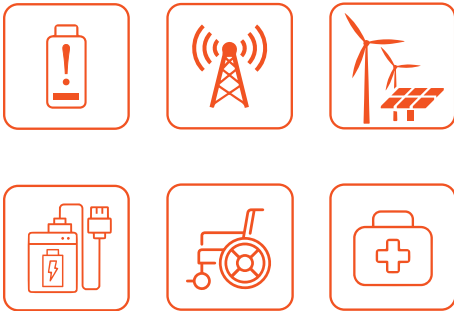

<b>Service life</b>	In buffer mode	10-12 years
	In buffer mode	1400 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,25-2,3 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams

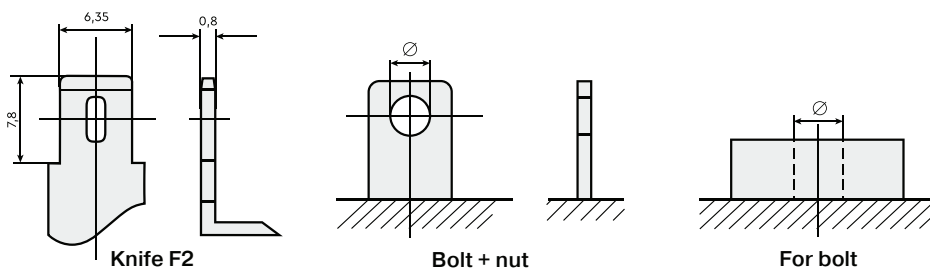

## Terminal diagrams


Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## Housing types

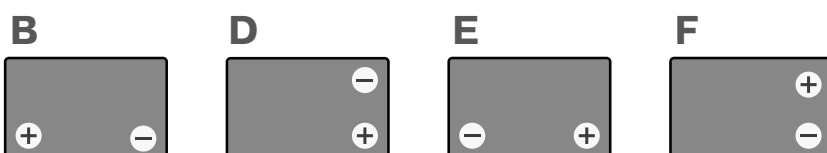





TEMPERATURE INFLUENCE ON THE CAPACITANCE

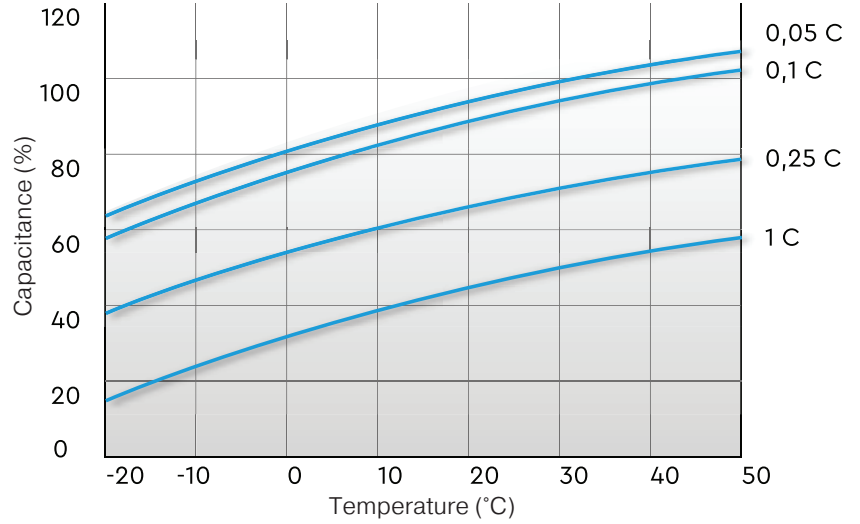

SERVICE LIFE IN CYCLIC MODE

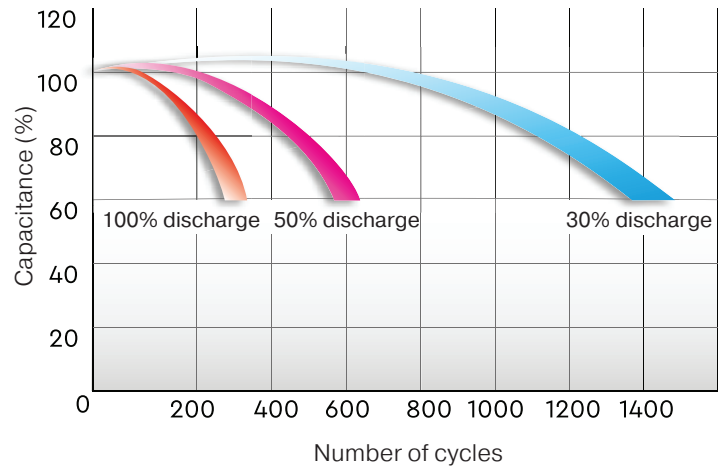

SERVICE LIFE IN BUFFER MODE

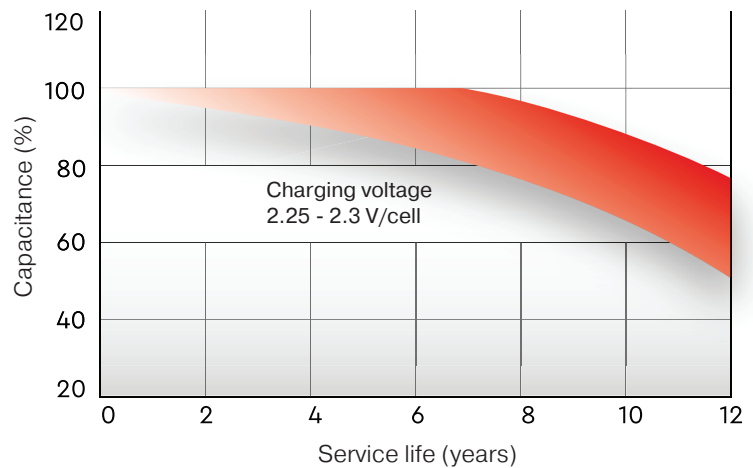



## Standard sizes

Type	Voltage, V	Capacitance, Ah*	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
GEL12-15	12	15	151	98	100	3.7	D	Knife F2
GEL12-20	12	20	181	77	167	5.3	E	Bolt + nut Ø 5.5 mm
GEL12-26	12	26	174	166	125	8.1	E	For M5 bolt
GEL12-33	12	33	194	132	168	10.6	B	Bolt + nut Ø 6.4 mm
GEL12-45	12	45	196	166	173	14.1	E	For M6 bolt
GEL12-55	12	55**	228	137	214	16.7	B	For M6 bolt
GEL12-65	12	65**	350	167	173	23.5	E	For M6 bolt
GEL12-75	12	75**	260	168	219	23	B	For M6 bolt
GEL12-85	12	85**	260	168	219	25.2	B	For M6 bolt
GEL12-100	12	100**	333	173	222	32.5	B	For M6 bolt
GEL12-120	12	120**	406	172	228	38.4	B	For M8 bolt
GEL12-150	12	150**	484	170	241	48.1	B	For M8 bolt
GEL12-200	12	200**	522	239	222	64.7	F	For M8 bolt

\*Capacitance is indicated at the 20-hour discharge.

\*\*Capacitance is indicated at the 10-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	10 min	15 min	30 min	1 hour	3 hours	5 hours	10 min	15 min	30 min	1 hour	3 hours	5 hours
GEL12-15	32.7	24.4	13.8	8.94	3.57	2.47	61.0	48.0	28.7	17.2	7.20	4.70
GEL12-20	41.4	33.2	19.9	11.4	4.75	3.17	77.7	63.3	38.1	22.6	9.41	6.31
GEL12-26	55.5	44.5	25.7	15.2	6.10	4.14	104	84.4	49.1	29.3	12.1	8.24
GEL12-33	67.8	54.1	30.2	20.6	8.13	5.62	118	93.0	58.0	37.5	15.6	10.9
GEL12-45	76.0	60.4	39.3	23.6	9.79	6.89	137	110	71.2	45.2	19.1	13.5
GX12-55	113	89.2	54.7	32.7	13.7	9.26	210	166	105	64.8	27.4	17.9
GEL12-65	134	108	63.0	40.3	15.8	10.7	240	195	115	75.6	32.1	21.5
GEL12-75	153	121	74.9	45.5	18.8	13.2	270	218	138	86.3	36.4	25.8
GEL12-85	166	132	82.3	47.8	21.3	14.0	301	254	156	100	41.1	28.2
GEL12-100	197	161	94.1	60.5	26.7	17.6	354	293	180	112	49.9	34.3
GEL12-120	220	183	110	68.6	30.4	20.3	397	340	210	129	53.9	37.7
GEL12-150	295	247	139	94.8	35.9	24.3	514	435	272	173	70.3	48.4
GEL12-200	359	296	202	120	49.3	36.8	647	531	371	226	94.2	66.3


# GX SPECIAL PURPOSE SERIES, GEL TECHNOLOGY

DELTA GX series lead-acid monoblocks are manufactured using GEL technology.

A composite gel is used as an electrolyte, which ensures deep discharge resistance and high temperature stability of Delta GX batteries. Designed for operation in both buffer and cyclic modes.


**Scopes of application:**

- Communication and telecommunication systems
- Uninterruptible power supplies
- Solar and wind power systems
- Autonomous power supply systems



<b>Service life</b>	In buffer mode	15 years
	In buffer mode	1400 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	25°C
	Cyclic mode	2,25-2,3 V/cell Temperature compensation - 5 mV/cell°C
	Buffer mode	2,35 - 2,4 V/cell Temperature compensation - 3.3 mV/cell°C


## Terminal diagrams

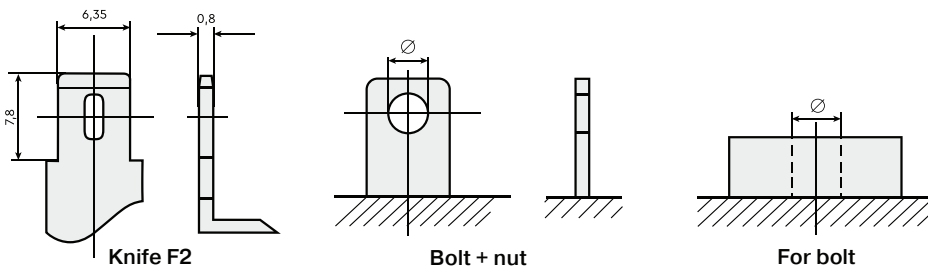

## Terminal diagrams

Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


## Housing types

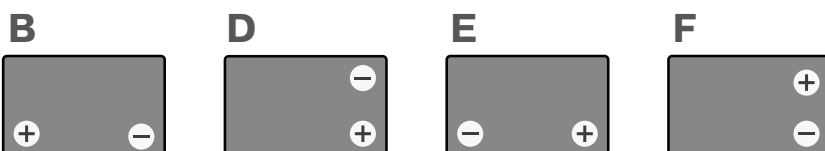







TEMPERATURE INFLUENCE ON THE CAPACITANCE

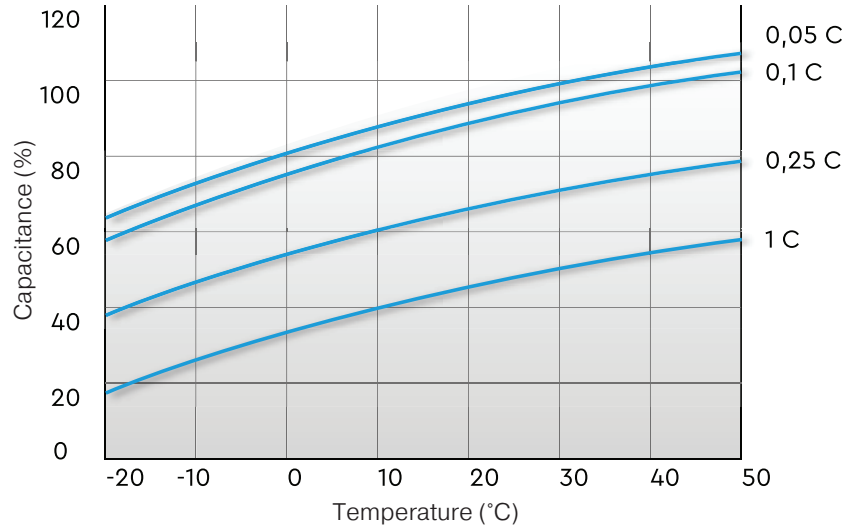

SERVICE LIFE IN CYCLIC MODE

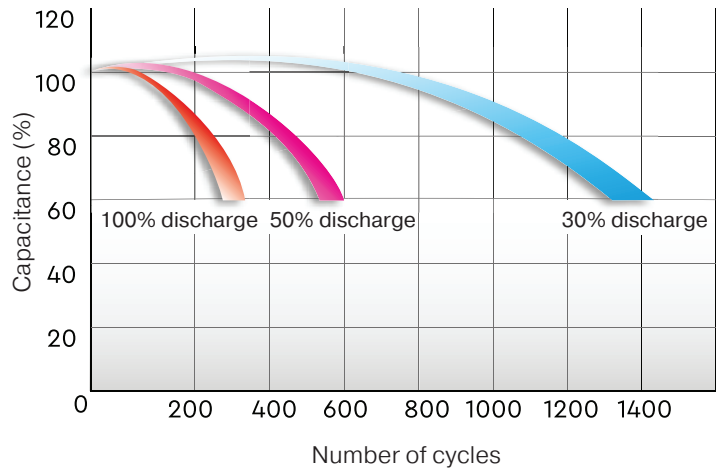

SERVICE LIFE IN BUFFER MODE

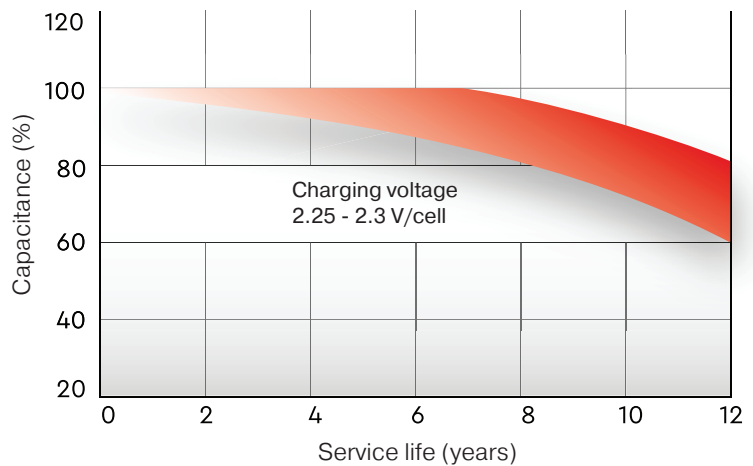

## Standard sizes

Type	Voltage, V	Capacitance, Ah*	Length (±1), mm	Width (±1), mm	Height max (±1), mm	Weight, kg	Body	Terminal type
GX12-12	12	12	151	95	101	3.67	D	Knife F2
GX12-17	12	17	181	77	167	5.5	E	Bolt + nut Ø 5.5 mm
GX12-24	12	24	166	175	125	8.3	E	For M5 bolt
GX12-33	12	33	195	130	180	11	B	For M6 bolt
GX12-40	12	40	197	165	170	14.7	E	For M6 bolt
GX12-45	12	45	197	165	170	14.6	E	For M6 bolt
GX12-55	12	55	239	132	210	17.3	B	For M6 bolt
GX12-60	12	60	258	166	235	23	B	For M6 bolt
GX12-65	12	65	350	167	183	23.4	B	For M6 bolt
GX12-75	12	75	258	166	215	23.5	B	For M6 bolt
GX12-80	12	80	350	167	183	24	B	For M6 bolt
GX12-90	12	90**	306	169	215	30	B	For M6 bolt
GX12-100	12	100**	330	171	220	32	B	For M6 bolt
GX12-120	12	120**	410	176	224	38	B	For M8 bolt
GX12-150	12	150**	482	170	240	47	B	For M8 bolt
GX12-200	12	200**	522	238	227	65	F	For M8 bolt
GX12-230	12	230*	520	269	208	72.6	F	For M8 bolt

\*Capacitance is indicated at the 20-hour discharge.

\*\*Capacitance is indicated at the 10-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	10 min	15 min	30 min	1 hour	3 hour	5 hours	10 min	15 min	30 min	1 hour	3 hour	5 hours
GX12-12	29.6	21.8	13.0	7.57	2.98	2.00	51.7	41.6	24.5	14.8	6.24	4.01
GX12-17	42.9	32.6	19.3	11.6	4.49	3.00	75.8	58.5	35.0	21.5	8.92	6.04
GX12-24	55.8	42.4	25.5	14.5	6.21	4.20	107	80.2	49.4	28.9	12.5	8.22
GX12-33	69.2	55.2	30.7	20.9	8.30	5.72	127	102	57.9	39.5	15.9	11.1
GX12-40	81.0	65.7	37.4	23.5	9.70	6.90	149	123	70.0	47.7	20.0	13.6
GX12-45	86.4	70.4	40.0	26.5	11.1	7.41	157	128	76.3	53.3	21.9	14.4
GX12-55	115	90.6	55.6	33.3	13.9	9.40	213	169	107	65.8	27.9	18.2
GX12-60	131	109	64.1	39.9	15.3	10.7	234	200	117	72.4	31.0	21.6
GX12-65	137	110	64.3	41.0	16.1	10.9	245	201	117	76.9	32.6	21.8
GX12-75	156	124	76.4	46.4	19.1	13.4	281	238	141	91.7	37.0	26.5
GX12-80	161	127	77.9	47.1	20.1	13.5	291	247	151	100	38.9	27.0
GX12-90	186	153	90	56.0	25.0	16.7	345	284	171	107	46.8	31.5
GX12-100	200	164	96.0	61.5	27.2	18.0	360	299	183	114	50.9	35.0
GX12-120	223	187	112	69.7	31.0	20.7	404	346	213	131	55.0	38.3
GX12-150	300	252	141	96.7	36.4	24.7	523	443	277	186	71.4	49.3
GX12-200	366	301	205	122	50.3	37.5	659	539	377	229	94.3	69.8
GX12-230	404	383	240	150	67.8	44.9	736	666	462	291	129	86.1



# FT-M SPECIAL PURPOSE SERIES, FT-M TECHNOLOGY

DELTA maintenance-free front-end lead-acid batteries of series FT-M are manufactured according to AGM technology with an absorbed electrolyte. Thanks to this technology, the batteries do not need to be refilled with distillate throughout their lifetime.

Housing is optimized for installation in 19" and 23" telecommunication cabinets and racks. The front-end arrangement of the terminals ensures easy installation and maintenance during operation.

DELTA batteries of FT-M series are optimized for power supply systems of base stations of mobile operators and other telecommunication infrastructure facilities.

## Scopes of application:

- Power supply of telecommunication equipment of mobile and fixed communication operators, Internet providers and backbone networks
- Use in «indoor» and «outdoor» cabinets, and communication containers
- Power redundancy for radio relay systems
- Operation in UPS and power plants
- Power racks for communication systems
- Telephone stations




# FT-M



<b>Service life</b>	In buffer mode	10-12 years
	In buffer mode	1300 cycles at 30% discharge depth
<b>Self-discharge</b>		Less than 3% per month
<b>Charging method</b>	DC voltage charging	20°C
	Cyclic mode	2,35-2,4 V/cell Temperature compensation - 30 mV/cell°C
	Buffer mode	2,27 - 2,3 V/cell Temperature compensation - 20 mV/cell°C

## Terminal diagrams



For bolt

## Terminal diagrams

Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


## Housing types

**F**







TEMPERATURE INFLUENCE ON THE CAPACITANCE

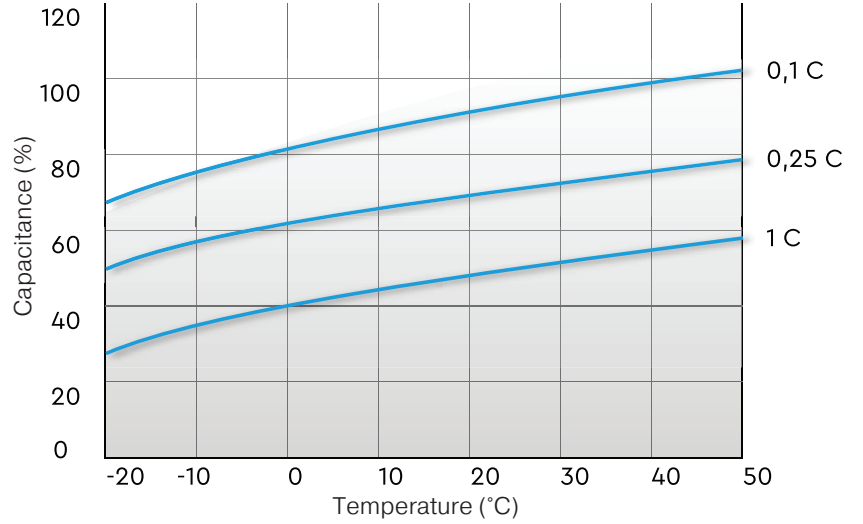

SERVICE LIFE IN CYCLIC MODE

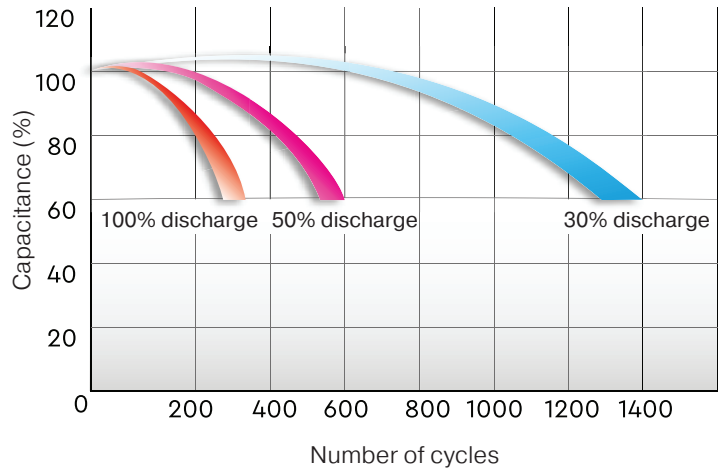

SERVICE LIFE IN BUFFER MODE

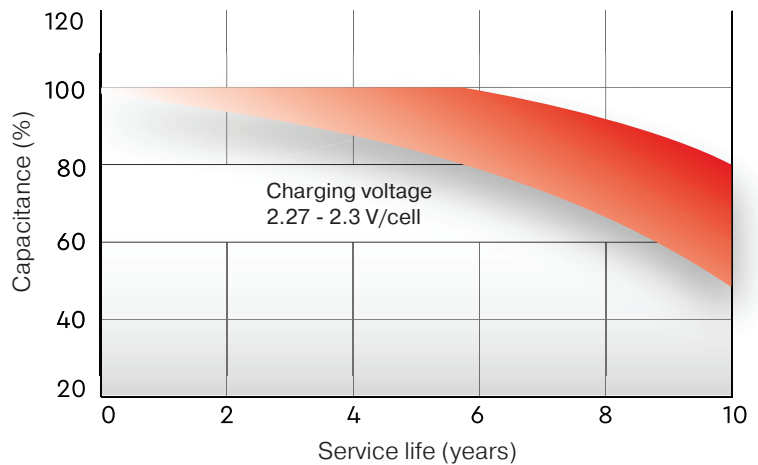

## Standard sizes

Type	Voltage, V	Capacitance, Ah*	Length (±2), mm	Width (±2), mm	Height max (±2), mm	Weight, kg	Body	Terminal type
FT 12-50 M	12	50	277	106	243	17	F	For M6 bolt
FT 12-100 M	12	100	508	110	238	29	F	For M6 bolt
FT 12-105 M	12	105	395	110	293	31.5	F	For M8 bolt
FT 12-125 M	12	125	436	108	317	36	F	For M8 bolt
FT 12-150 M	12	150	548	105	316	45.5	F	For M8 bolt
FT 12-180 M	12	180	546	125	323	53	F	For M8 bolt

\*Capacitance is indicated at the 10-hour discharge.

## Discharge characteristics

Type	DC discharge up to 1.70 V/cell, A, at t 25°C.						Discharge with constant power up to 1.70 V/cell, W/cell, at t 25°C					
	30 min	45 min	1 hour	3 hour	5 hours	8 hours	30 min	45 min	1 hour	3 hour	5 hours	8 hours
FT 12-50 M	51.7	40.2	32.8	13.7	9.02	6.05	99.0	77.5	63.3	27.1	17.6	11.8
FT 12-100 M	95.1	68.8	55.6	25.5	17.5	11.9	178	133	106	50.2	33.8	23.5
FT 12-105 M	109	82.1	68.8	28.7	18.7	12.6	208	158	133	56.9	37.1	24.5
FT 12-125 M	127	96.0	80.1	33.6	22.9	15.3	232	178	146	62.8	42.3	28.7
FT 12-150 M	159	121	103	43.9	28.6	18.5	274	212	180	83.7	54.9	35.0
FT 12-180 M	181	133	109	48.0	32.1	21.6	326	249	211	93.2	61.2	14.4



# CT STARTER BATTERIES

DELTA CT Series lead-acid batteries are specially designed for systems that use multiple powerful discharges.

They meet international safety standards and are recommended for use in motorcycles, scooters, water motorcycles, quad bikes, all-terrain vehicles, as well as gasoline and diesel generators. DELTA batteries of CT series offer an attractive price, excellent performance and high reliability.


## Scopes of application:

- Motorcycles
- Scooters
- Quadrocycles
- All-terrain vehicles
- Hydrocycles
- Snowmobiles
- Motoblocks
- Diesel and gasoline generators



<b>Self-discharge</b>	Less than 3% per month
<b>Constant recharging voltage</b>	14,4-14,8 V

## Terminal diagrams

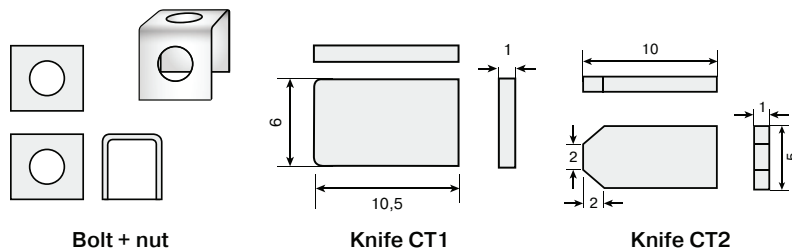

## Housing types



## Standard sizes

Type	Voltage, V	Capacitance, Ah	Length, mm	Width, mm	Height max, mm	Weight, kg	Starting current, CCA (-18°C), A	Polarity	Body	Terminal type (*)
CT 12025	12	2.5	114	39	87	0.89	40	side (reverse)	F	Knife CT1
CT 12026	12	2.5	115	50	86	0.99	45	side (reverse)	F	Knife CT2
CT 1204	12	4	114	70	87	1.32	50	reverse (- +)	E	Bolt + nut Ø5 mm
CT 1205	12	5	114	70	106	1.82	80	reverse (- +)	E	Bolt + nut Ø5 mm
CT 1205.1	12	5	120	61	129	1.94	65	reverse (- +)	E	Bolt + nut Ø5 mm
CT 1207	12	7	150	86	94	2.47	105	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1207.1	12	7	114	70	132	2.31	100	reverse (- +)	E	Bolt + nut Ø6 mm
CT 1207.2	12	7	114	70	108	2	130	reverse (- +)	E	Bolt + nut Ø6 mm
CT 1208	12	8	150	66	95	2.25	130	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1209	12	9	150	86	108	3.03	135	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1209.1	12	9	151	71	107	2.65	115	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1210	12	10	137	77	135	2.79	100	direct (+ -)	B	Bolt + nut Ø5.5mm
CT 1210.1	12	10	150	86	93	2.95	190	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1211	12	11	151	86	112	3.36	210	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1212	12	12	150	86	131	3.85	180	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1212.1	12	12	151	71	130	3.25	155	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1212.2	12	14	151	71	146	3.9	155	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1214	12	14	151	88	147	4.72	200	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1214.1	12	14	132	89	164	4.6	165	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1216	12	16	205	70	162	6.09	200	reverse (- +)	E	Bolt + nut Ø6 mm
CT 1216.1	12	16	151	88	164	5.25	230	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1218	12	20	177	88	154	4.72	270	direct (+ -)	B	Bolt + nut Ø6 mm
CT 1220	12	20	204	91	159	6.5	250	reverse (- +)	E	Bolt + nut Ø6 mm
CT 1220.1	12	20	181	77	167	5.22	260	reverse (- +)	B	Bolt + nut Ø6 mm
CT 12201	12	20	177	88	154	6.3	270	reverse (- +)	E	Bolt + nut Ø6 mm
CT 1230	12	20	168	126	175	8.57	300	reverse (- +)	E	Bolt + nut Ø6 mm

Type	YUASA analog	Type	YUASA analog
CT 12025	YT4B-BS	CT 1211	YTZ12S, YTZ14S
CT 12026	YTR4A-BS	CT 1212	YTX14-BS, YTX12-BS
CT 1204	YB4L-B, YB4L-A, YTX4L-BS	CT 1212.1	YT12B-BS
CT 1205	YTX5L-BS, YTZ7S, YT5L-BS	CT 1212.2	YT14B-BS
CT 1205.1	12N5-3B, YB5L-B	CT 1214	YTX14-BS, YTX14H-BS, YTX16-BS, YB16B-A
CT 1207	YTX7A-BS	CT 1214.1	YB14-BS, YTX14AH, YTX14AH-BS
CT 1207.1	YTX7L-BS	CT 1216	YB16AL-A2
CT 1207.2	YTZ7S	CT 1216.1	YTX16-BS, YB16B-A
CT 1208	YT7B-BS, YT7B-4, YT9B-BS	CT 1218	YTX20-BS, YTX20H, YB16-B-CX, YB16-B, YB18-A
CT 1209	YTX9-BS, YTX9	CT 1220	Y50-N18L-A3, YTX24HL-BS, YTX24HL
CT 1209.1	YT9B-BS	CT 1220.1	YT19BL-BS
CT 1210	YB9A-A, YB9-B, 12N9-4B-1	CT 12201	YTX20L-BS, YTX20HL-BS, YB16L-B, YB18L-A
CT 1210.1	YTZ10S	CT 1230	YIX30L, YIX30L-BS, YB30L-B

## Terminal diagrams

Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

# EPS STARTER BATTERIES

DELTA starter batteries of EPS (Extreme Power Series) series are sealed, maintenance-free lead-acid batteries manufactured according to NANO-GEL technology especially for motor vehicles with high energy consumption. EPS series is designed for starting engines in extreme temperature conditions, for engines of intensively used motor vehicles, for engines of large volumes, for diesel engines.

**Scopes of application:**


- Motorcycles
- Quadrocycles
- Hydrocycles
- Snowmobiles



<b>Self-discharge</b>	Less than 3% per month
<b>Constant recharging voltage</b>	14,4-14,8 V




**Terminal diagrams**



Bolt + nut

**Housing types**

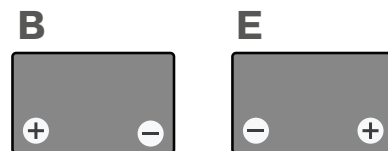

**Terminal diagrams**

Component	Positive plate	Negative plate	Container	Cover	Valve	Terminals	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid



## Standard sizes

Type	Voltage, V	Capacitance, Ah	Length, mm	Width, mm	Height max, mm	Weight, kg	Starting current, CCA (-18°C), A	Polarity	Body	Terminal type (*)
EPS 1214	12	14	149	87	144	4.6	220	direct (+ -)	B	Bolt + nut 6 mm
EPS 1216	12	16	205	70	162	5.86	230	reverse (- +)	E	Bolt + nut 6 mm
EPS 1218	12	20	176	87	154	6.5	270	direct (+ -)	B	Bolt + nut 6 mm
EPS 1218.1	12	20	151	87	161	5.96	250	direct (+ -)	B	Bolt + nut 6 mm
EPS 1220	12	24	205	87	162	7.74	350	reverse (- +)	E	Bolt + nut 6 mm
EPS 12201	12	20	176	87	154	6.5	310	reverse (- +)	E	Bolt + nut 6 mm
EPS 1230	12	30	166	130	175	9.83	400	reverse (- +)	E	Bolt + nut 6 mm

Type	YUASA analog
EPS 1214	YTX14-BS, YTX14H-BS
EPS 1216	YTX16AL-A2
EPS 1218	YTX20-BS, YTX20H-BS
EPS 1218.1	YTX20CH-BS
EPS 1220	YTX24HL-BS, YTX24HL
EPS 12201	YTX20HL-BS, YTX20L-BS
EPS 1230	YTX30HL-BS, YTX30L-B, YTX30L

## Scope of applications for DELTA batteries

Series	DT	DTM	DTM I	DTM L	HR	HR-W	HRL	GEL	GX	FT-M	CT	EPS
Alternative energy					••	••	•••	••••	••••			
Uninterruptible and redundant power supplies		••	•••	•••	•••	••••	••••	••••	••••	••		
Motorcycles, scooters, diesel generators											•••••	•••••
Portable measuring instruments, power tools	•••	•••	••	••	••	••	••					
Safety systems	••••	••••	•••	•••	•••	••	•					
Heating and water supply systems		••	••••	••••	••	••	••••					
Communication and telecommunication systems					••	••	••	••	••	••••		
Electrical medical equipment, wheelchairs	••	••	•••	•••	••	••	•••	•••	•••			
Terminals of self-service	•••	•••	•••	•••	•••	•••	•••			•••		

**DELTA** batteries provide reliable power and smooth operation of your equipment and are recommended by leading vendors.

The products pass several stages of quality control, which allows producing the battery with stable technical parameters. Tests by independent research centres confirm the excellent performance and reliability of **DELTA** batteries.

### Features and benefits:

- AGM technology enables recombination of up to 99% of the gas released;
- No restrictions on air traffic;
- UL compliance;
- Operation in any position;
- Calcium-alloyed lead plates provide high energy density;
- Long service life;
- Maintenance-free. No distilled water refills required;
- Low self-discharge;
- The battery case is made of ABS plastic that is not flammable.



[www.delta-batt.com](http://www.delta-batt.com)