

► Air Cooled Water Chillers

Aqualogic

AQL 40 to 130



42 to 131 kW



Engineering Data Manual

EDM AQL-A.3GB

Date : November 2007

Supersedes : TM AQL-A.2GB/03.04

Specifications

The **Aqu@Logic** air cooled water chillers comprises **10 models** covering a nominal cooling capacity range of from **42 to 131 kW**.

Aqu@Logic represents a new generation of innovative water chillers, integrating components using the very latest technological advances.

These components provide **Aqu@Logic** air cooled water chillers with considerable advantages in terms of compact design and improved efficiency and reliability.

All **Aqu@Logic** air cooled water chillers are equipped with **ILTC (Intelligent Liquid Technology Chiller)** control providing optimised control across the unit's entire operating range.

As standard equipment, each unit has two compressors, fitted in tandem, for adapting to partial system loads.

Pressure and temperature sensors provide data to the electronic control system for taking account of the prevailing operating parameters in order to optimise system performance.

This intelligent control system enables water temperature to be maintained within the required range, whilst only using a small volume of water (**2.5 l/kW**) and thus eliminating, for the majority of comfort air conditioning applications, the need for a buffer water tank.

A maximum of technology

The new generation of **Aqu@Logic** air cooled water chillers integrates high technology components :

- Scroll compressors.
- Brazed stainless steel plate heat exchangers.
- High efficiency axial fans with external rotors.
- Microprocessor based ILTC control.
- HFC 407C refrigerant fluid.

Quick and easy installation at minimal cost

- Compact units taking up the strict minimum of ground surface area. for easy installation.
- "Plug and Play" design with an integrated hydraulic module for minimising installation costs.
- Perfect accessibility : easy access to all components, thanks to panels removable by a quarter turn key or screw, thus significantly reducing unit maintenance times.

Increased performance

- Optimal efficiency, thanks to the use of Scroll compressors with a high Coefficient Of Performance (COP), fitted in tandem on all models in the range.
- Guaranteed for operating at outdoor temperatures between -10 °C and +46 °C inclusive, thanks to the automatic condensing pressure management system supplied as standard equipment on all models in the range.
- Silent running, thanks to the dual-speed fan, selected for being one of the quietest fans currently available on the market, and thanks to the use of particularly quiet, low vibration, Scroll compressors.

Built to last

- ILTC control automatically manages the balancing of the compressors' running times, thus enabling their service life to be extended.
- Sealed refrigerant circuit : all the refrigerant components and pipe work are brazed, thus eliminating any risks of leakage. Pressure transducers replace the HP and LP pressostats, along with their capillary tubes (principal source of leaks).

Energy savings all year round

Thanks to ILTC control :

- Providing intelligent management of the compressors' running times.
- In the majority of cases. obviating the need for a buffer tank for comfort air conditioning applications.
- Continuously monitoring and managing all the machine's operating parameters.

Cabinet and structure

- Made of galvanised steel panels coated with oven-baked epoxy paint. Colour : **RAL 9001**.
- For access to all components, the panels are removable by just releasing quarter turn locks or screws.

Compressors

- Hermetically sealed, high output Scroll type compressors with a high Coefficient Of Performance (COP).
- All models in the range equipped with compressors fitted in tandem for reducing both starting current draw and power absorbed under partial load conditions.
- Excellent acoustic performance with extremely quiet operation and minimal vibration.
- Robust and reliable Scroll compressor technology : Few moving parts (only 3), high tolerance to liquid pressure shocks, low starting torque, protection against excessive discharge temperatures.
- Compressor motor cooled by intake gasses and equipped with automatic reset internal high temperature protection.
- All compressors are mounted on anti-vibration pads in order to minimise noise and vibration transmission. Furthermore, they are supplied with soundproof jackets.

Evaporator

- Direct expansion type, made of brazed stainless steel plates.
- The evaporator is surrounded by an electrical heating resistance and insulated with cellular polyurethane foam to provide anti-freeze protection down to an ambient temperature of - 20 °C.

Air condenser

- Comprising a heat exchanger coil equipped with aluminium fins mechanically crimped on to copper tubes.

Fan motor assembly

- Helicoidal type fans with direct drive by a dual speed motor (Protection Index : IP 54), equipped with automatic reset internal high temperature protection.
- One 800 mm diameter vertical flow fan on models 40 to 80 and two 800 mm diameter vertical flow fans on models 90 to 130. Each fan is equipped with a fan blade protection grille.

Specifications (continued)

Refrigerant circuit

The refrigerant circuit comprises all the required components such as filter-dryer, sight glass with moisture indicator and thermostatic expansion valve. It also comprises high and low pressure sensors, as well as sensors for inlet and outlet water temperatures and a discharge temperature sensor.

To facilitate maintenance operations, the low and high pressure sections of the refrigerant circuit are equipped with pressure tapping points.

All the refrigerant components and pipe work are brazed, thus eliminating any risks of leakage and ensuring total, long lasting circuit tightness.

Pressure transducers replace the HP (High Pressure) and LP (Low Pressure) pressostats, along with their capillary tubes (principal source of leaks).

The refrigerant circuit is optimised to operate with HFC 407C refrigerant fluid.

Electrical panel

Access to the electrical panel is possible after having taken off the panels, removable by just releasing quarter turn locks or screws. The electrical panel of models 90 to 130 rotates to allow an easy access for inspection inside the unit.

The following equipment is mounted on the power circuit side of the electrical panel : a power supply connection terminal block - 400 V / 3 Ph / 50 Hz + Neutral (models 40 to 80) or 400 V / 3 Ph / 50 Hz (models 90 to 130), a main switch, a main terminal block, a distribution terminal block, the compressors contactors, the thermal relays and contactors for the fans, and the hydraulic pump (if fitted).

On the control circuit side of the panel, the ILTC control electronic circuit board with its 230 V single phase power supply is mounted.

Integrated hydraulic module

An integrated hydraulic module is available for all Aqu@Logic air cooled water chillers. offering savings in installation times and reducing installation costs.

Each hydraulic module comprises the following components : Automatic air bleed valve, water flow adjustment valve, water flow switch, drain cock, expansion tank, safety valve, pressure gauge, hydraulic pump and fitted water filter.

As standard, all pumps produce available pressure higher than 100 kPa. A pump producing available pressure higher than 150 kPa can be supplied on request.

Other standard equipment

- **Anti-vibration pads kit** : Aqu@Logic units are supplied with rubber anti-vibration pads as standard, to be fitted on site by the installer.
- **Water flow switch** : For Aqu@Logic units without an integrated hydraulic module, a field-installed paddle type water flow switch is supplied as standard.
- **Water filter** : Supplied loose.
- **Coil protection grilles** : Aqu@Logic units are supplied with heat exchanger coil protection grilles as standard.

Accessories and options

- **Anti-vibration mount kit** : Visible spring anti-vibration mounts for the unit and the ground mounting holes. For on site fitting by the installer.
- **Condenser coil protective coating** :
 - aluminium fins with hydrophilic coating.
 - aluminium fins with polyurethane coating.
- **High pressure fans** : For models 40 to 120 with ductable fans providing external static pressure of 80 Pa (models 40 to 60) and 100 Pa (models 70 to 120).
- **400 V / 230 V transformer** : For models 40 to 80 with electrical supply without neutral.
- **Buffer tank kit** : For air conditioning applications where it is not possible to comply with the water volume ratio of 2.5 l / kW.


This kit comprises a factory-fitted module, mounted under the unit, and supplied with the external hydraulic pipe work to be fitted on site.

The hydraulic module is fully encased in galvanised steel panels, painted the same colour as the unit. and comprises a buffer tank, fully insulated with 30 kg / m³ density cellular polyurethane foam.

As standard, the buffer tank is equipped with anti-freeze protection in the form of an immersion heater.

- **Remote control terminal** : Hard-wired control enabling the unit's Start / Stop functions to be controlled remotely.
- **Phase monitor** : Factory-fitted option enabling the compressor's rotational direction to be checked and to stop the unit if the minimum voltage threshold is reached.
- **Low ambient kit (-18 °C)** : Factory-fitted option.
- **Chiller sequencer** : Supplied loose. it allows a control up to 4 units.
- **HP and LP manometers** : Supplied loose.
- **Water isolating valves** : Supplied loose.
- **Packaging** : Sea worth or wooden crate.

ILTC control system

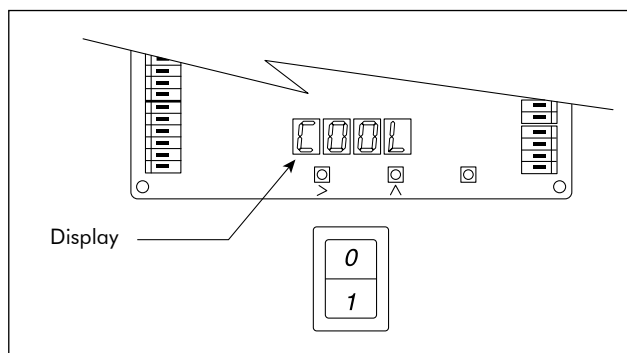

The ILTC control system is an intelligent digital control system designed especially for optimising the operation of **Aqu@Logic** units and maintaining conditions of maximum comfort.

Before each start-up, the ILTC control system runs through a complete machine checklist. It continuously monitors and manages all the machine's operating parameters and safety devices. It precisely manages the running of the compressors and fans in order to optimise energy consumption. It also controls the operation of the water circulation pump.

User interface

The ILTC control system has an easy-to-use user interface comprising a 4 character, 7 segment red colour LED display, 3 keys below the display for access to the different menus : the right key is reserved for the TEST mode, the centre key for scrolling up and down the menus, and the left key for selecting a parameter and displaying its value.

Six main menus are available for accessing all the machine's controls :

- Parameters.
- Temperature sensors and pressure transducers.
- Active safety alarms.
- Compressors' operating times.
- Safety alarms history (last 10 alarms).
- Machine operating status.

Using these 6 menus enables a machine status diagnosis to be performed as well as checking all the Aqu@Logic unit's parameter settings.

ILTC control system description

- Intelligent regulation with return water temperature control and outlet water temperature measurement.
- The selection and operating time duration of each compressor is automatically managed by the ILTC control system, with the possibility of balancing the compressors' operating times. When they are operating, the compressors are monitored constantly to improve their operating cycle and to avoid any excessive cycling. Thus, these Aqu@Logic units can operate in complete safety with a low volume of water in the installation, enabling the buffer tank to be dispensed with in the majority of comfort air conditioning applications.
- The ILTC control system is intelligent, i.e. it continuously adapts to changes in the installation's thermal load by optimising running times with the selection of one or both compressors, in relation to actual demand.

- Condensing pressure control is included as standard, thus enabling all Aqu@Logic units to operate between - 10 °C and + 46 °C. Condensing pressure control is provided by an algorithm, automatically managing the fan speeds operation. In partial load or low ambient outdoor temperature conditions, the fan is switched automatically to low speed running, offering a significant reduction in noise levels.
- Water pump control with 2 possible operating modes : Continuous operation in ON / OFF mode or operating only in ON mode.
- As standard, the ILTC control system offers the possibility of selecting a "Night-time running mode" function.
When the "Night-time Running" mode is activated, four operating modes are available :
 - 1st mode : Selected to change the set temperature for energy savings when the building is unoccupied.
 - 2nd mode : Selected to enable the set temperature to be lowered.
 - 3rd mode : Selected to change the set condensing pressure values, to force the fan to run at low speed and to obtain silent running during the night.
 - 4th mode : Selected for applying a combination of modes 1 and 3.
- In addition, as a standard feature, the ILTC control system offers the possibility of automatically compensating the set temperature value in relation to changes in the outdoor air temperature.

Safety

The system measures changes in parameters (temperatures, pressures...) and reacts to keep the compressor within its operating range.

If, despite everything, a parameter exceeds its limit, a warning message is generated and the machine is shut down.

The following faults cause the machine to shut down :

- Suction pressure too low.
- Discharge pressure too high.
- Outlet water temperature below authorised limits.
- Discharge temperature too high.
- Compressor(s), fan(s), water pump overload.
- Compressor direction of rotation reversed.
- Temperature sensors and pressure transducers fault.
- Evaporator anti-freeze protection.

The ILTC control system has **33 alarm codes** enabling the origin of breakdowns to be determined.

The following safety devices protect the units :

- Water flow switch or differential pressostat.
- Fan high speed and low speed thermal relays.
- N° 1 and N° 2 compressor internal thermal protection.
- Hydraulic pump thermal relay.
- HP safety pressostat.


Remote unit management

The system enables the following functions to be operated, by means of dry contacts :

- Remote ON / OFF switch.
- Remote Day / Night running mode switch.
- Loadshedding mode.
- Remote alarm reading.

Refrigerant flow diagrams


Models 40 to 80

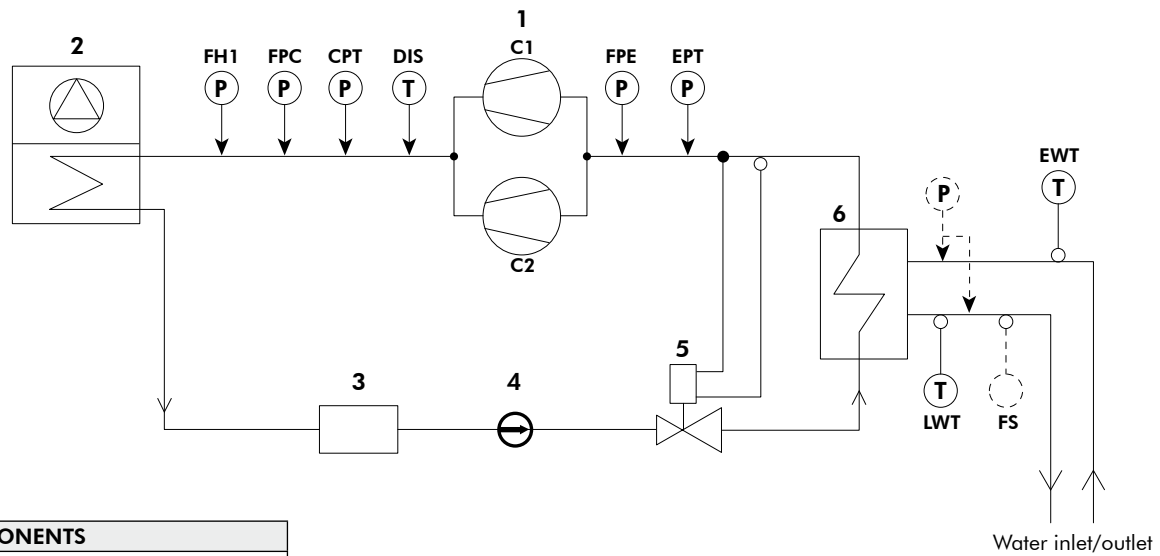

COMPONENTS	
1	C1/C2 compressors
2	Condenser
3	Filter dryer
4	Sight glass with moisture indicator
5	Expansion valve
6	Plate heat exchanger

CONTROL AND SAFETY COMPONENTS			
CPT	Condenser pressure tapping point	FH1	High pressure safety pressostat
DIS	Discharge temperature sensor	FPC	Condenser pressure transducer
EPT	Evaporator pressure tapping point	FPE	Evaporator pressure transducer
EWT	Inlet water temperature sensor	LWT	Outlet water temperature sensor

Models 90 to 130

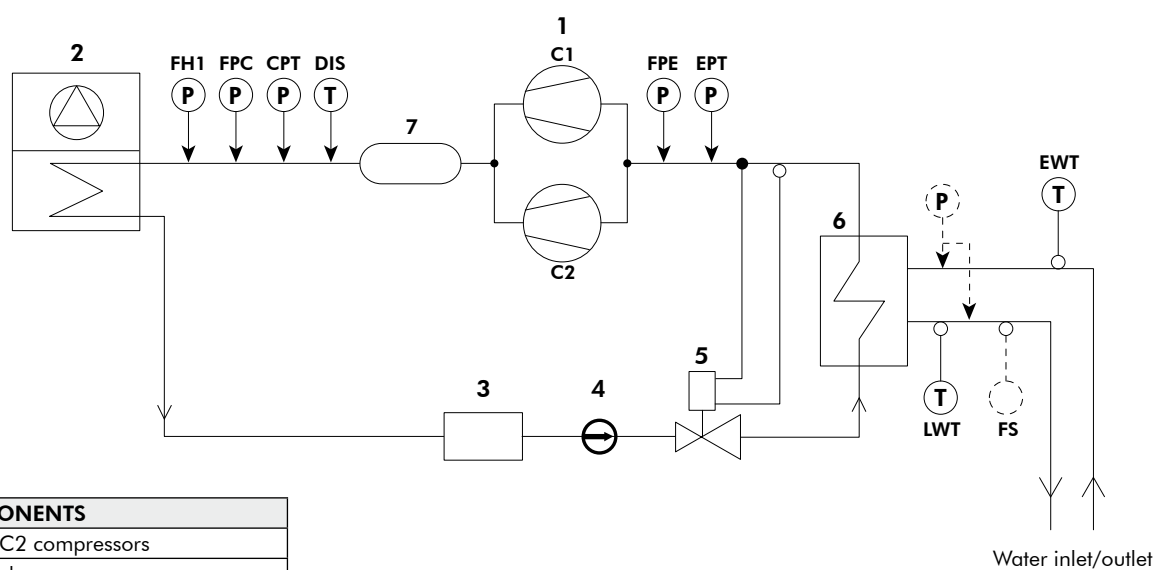

COMPONENTS	
1	C1/C2 compressors
2	Condenser
3	Filter dryer
4	Sight glass with moisture indicator
5	Expansion valve
6	Plate heat exchanger
7	Muffler

CONTROL AND SAFETY COMPONENTS			
CPT	Condenser pressure tapping point	FH1	High pressure safety pressostat
DIS	Discharge temperature sensor	FPC	Condenser pressure transducer
EPT	Evaporator pressure tapping point	FPE	Evaporator pressure transducer
EWT	Inlet water temperature sensor	LWT	Outlet water temperature sensor

The low pressure refrigerant fluid flows into the evaporator. it evaporates and is then superheated by absorbing heat from the passing of "chilled" water through the evaporator.


The low pressure vapour is sucked in by the compressor to be compressed at high pressure and high temperature.

The high pressure, superheated refrigerant flows into the condenser where the heat is rejected into the ambient air.

Then the condensed, subcooled refrigerant fluid flows into the expansion valve, where the pressure and temperature is lowered before the fluid is returned to the evaporator.

Operating limits and correction factors

Operating temperature ranges

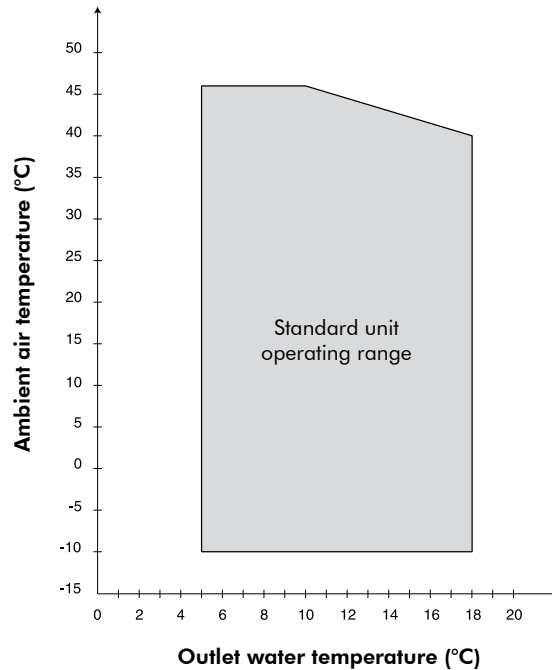

Operating limits (*)

TEMPERATURE		MIN.	MAX
Inlet water at start-up	°C	10	30
Inlet water during running	°C	10	23
Outlet water during running (without glycol)	°C	5	18
Water temperature difference	K	3	7
Working pressure	bar	-	3
Air	°C	-10	46

(*) For chilled water $\Delta T = 5K$.

Evaporator fouling factors

Fouling factors (m ² .°C/kW)	Cooling capacity correction factors	Power consumption correction factors
0.044	1.000	1.000
0.088	0.987	0.995
0.176	0.964	0.985
0.352	0.915	0.962

Altitude correction factors

Altitude (m)	Cooling capacity correction factors	Power consumption correction factors
0	1.000	1.000
600	0.987	1.010
1200	0.973	1.020
1800	0.958	1.029
2400	0.943	1.038

Condenser fouling factors

Fouling factors (m ² .°C/kW)	Cooling capacity correction factors	Power consumption correction factors
0.044	1.000	1.000
0.088	0.987	1.023
0.176	0.955	1.068
0.352	0.910	1.135

Hydraulic circuit water volume

Minimum volume for comfort air conditioning applications

SIZES	40	50	60	70	80	90	100	110	120	130
Volume * (litres)	105	120	145	170	190	220	245	280	310	330

(*) Volumes calculated for Eurovent operating conditions (air : 35 °C, water 12/7 °C) with a 2.5 l/kW ratio. For other nominal operating conditions, recalculate the minimum volume by multiplying the corresponding cooling capacity by the 2.5l/kW ratio.
If the minimum volume requirement can not be met, an additional buffer tank must be included in the installation.

Maximum volume (*) in litres for comfort air conditioning applications

SIZES	40 to 80	90 to 130
Water	600	1500
10% glycol solution	450	1200
15% glycol solution	425	1100
20% glycol solution	400	1000
25% glycol solution	375	930
30% glycol solution	350	860
35% glycol solution	300	800

(*) Limit linked to the unit's expansion tank volume. In the case of an installation with a water volume greater than the values stated in the above table, an additional buffer tank must be included in the installation.

Technical data

AQL SIZES		40	50	60	70	80
Power supply (V/Ph/Hz)		400/3+N/50				
Cooling capacity *	kW	42.0	46.5	56.9	67.3	75.4
Total power consumption with pump	kW	16.1	19.4	23.9	28.1	30.7
Total power consumption	kW	15.4	18.7	22.8	27.0	29.6
COP		2.9	2.6	2.7	2.7	2.7
Refrigerant charge	kg	9	9	10	11	16
Lw sound power levels	dB(A)	82	82	84	87	87
COMPRESSORS						
Type		Scroll - Hermetically sealed				
Number		2	2	2	2	2
Capacity reduction stages		2	2	2	2	2
Minimum capacity	%	45	36	36	45	50
Safety pressostat		HP (fixed set point)				
		LP transducer				
		HP transducer				
EVAPORATOR						
Type		Brazed stainless steel plates				
Maximum pressure refrigerant side	bar	30				
Maximum pressure water side	bar	10				
Safety		Water flow switch				
Anti-freeze protection heating resistance		1	1	1	1	1
Water volume	litres	3.44	4.33	5.33	6.33	7.10
CONDENSER						
Type		3/8" copper tube - Louvred aluminium fins				
FANS						
Number		1	1	1	1	1
Fan diameter	mm	800	800	800	800	800
Speed (High/Low)	rpm	700/500	700/500	700/500	900/520	900/520
Max. air flow (High Speed)	m ³ /h	15500	15500	15500	21000	21000
WATER CONNECTIONS						
Type		Gas - Threaded				
Diameter	inches	2"	2"	2"	2"	2"
Expansion tank	litres	12				
Filter		2", supplied fitted				
Safety valve calibration	bar	3	3	3	3	3
WATER CIRCULATION PUMP						
Type		Single speed centrifugal pump				
Material		Composite				
Protection index		IP54				
Three phase motor		Class F				
WEIGHT						
With pump	kg	500	550	570	600	620
Without pump	kg	480	530	550	580	600
DIMENSIONS						
Length	mm	1737	1737	2168	2168	2168
Width	mm	1201	1201	1201	1201	1201
Height	mm	1634	1634	1634	1634	1634

* Values based on chilled water inlet / outlet temperatures of 12 / 7° C and an ambient air temperature of 35° C.

Technical data (continued)

AQL SIZES		90	100	110	120	130
Power supply (V/Ph/Hz)		400/3/50				
Cooling capacity *	kW	86.4	98.0	112.0	122.2	131.0
Compressor power consumption	kW	31.0	35.7	39.8	44.4	43.0
Total power consumption	kW	43.2	48.4	54.9	60.1	62.0
COP		2.8	2.7	2.8	2.8	3.0
Refrigerant charge	kg	24	28	30	34	34
Lw sound power levels	dB(A)	86	86	87	87	90
COMPRESSEURS						
Type		Scroll - Hermetically sealed				
Number		2	2	2	2	2
Capacity reduction stages		2	2	2	2	2
Minimum capacity	%	45 / 55	40 / 60	45 / 55	50 / 50	50 / 50
Safety pressostat		HP (fixed set point)				
		LP transducer				
		HP transducer				
EVAPORATOR						
Type		Brazed stainless steel plates				
Maximum pressure refrigerant side	bar	30				
Maximum pressure water side	bar	10				
Safety		Water flow switch				
Antifreeze protection heating resistance	W	70	70	70	70	70
Water volume	litres	7.1	8.4	10.3	11.3	13.9
FANS						
Number		2	2	2	2	2
Fan diameter	mm	800	800	800	800	800
Speed (High/Low)	rpm	700/500	700/500	700/500	700/500	900/520
Max. air flow (High Speed)	m ³ /h	30000	30000	30000	30000	40000
WATER CONNECTIONS						
Type		Gas - Male threaded				
Diameter	inches	2"	2"	2"	2"	2"
WEIGHT						
Shipping weight	kg	1000	1050	1100	1100	1120
DIMENSIONS						
Length	mm	2523	2523	2865	2865	2865
Width	mm	1201	1201	1201	1201	1201
Height	mm	1634	1634	1634	1634	1634

* Values based on chilled water inlet / outlet temperatures of 12 / 7° C and an ambient air temperature of 35° C.

Technical data (continued)

Protection devices

AQL SIZES	40	50	60	70	80	90	100	110	120	130
Fan thermal protection	YES									
Compressors thermal protection	YES									
Ancillaries / Fan circuit breakers	YES									
Compressors circuit breakers										
Water pressure differential pressostat										
Water flow switch	YES									
HP pressostat	YES									
Evaporator antifreeze protection	YES									
HP transducer	YES									
LP transducer	YES									

Lw (A) sound power levels

AQL SIZES	FREQUENCY IN OCTAVE BAND (HZ)								GLOBAL dBA
	63	125	250	500	1000	2000	4000	8000	
40	62	70	74	80	74	70	67	64	82
50	62	70	74	80	74	70	67	64	82
60	63	71	75	82	75	71	68	65	84
70	67	75	79	84	75	74	72	69	87
80	67	80	84	84	75	79	77	74	87
90	80	79	73	79	80	76	71	61	86
100	80	79	73	79	80	76	71	61	86
110	81	81	74	80	80	78	73	61	87
120	81	81	74	80	80	78	73	61	87
130	86	86	79	85	85	83	83	67	90

Lp (A) sound pressure levels

AQL SIZES	FREQUENCY IN OCTAVE BAND (HZ)								GLOBAL dBA
	63	125	250	500	1000	2000	4000	8000	
40	46	54	58	64	58	54	51	48	65
50	46	54	58	64	58	54	51	48	65
60	47	55	59	65	58	54	52	48	67
70	51	59	63	68	59	58	56	53	70
80	51	64	68	68	59	63	61	58	70
90	63	62	56	62	63	59	54	44	69
100	63	62	56	62	63	59	54	44	69
110	63	63	56	61	61	60	55	43	69
120	63	63	56	61	61	60	55	43	69
130	68	68	61	67	67	65	65	49	72

Sound pressure levels indicated at 1 m from the unit in a free field condition.

Electrical data

Unit with hydraulic module

AQL SIZES		40	50	60	70	80	90	100	110	120	130
Supply voltage (V / Ph / Hz)		400 / 3+N / 50					400 / 3 / 50				
Permissible voltage		380-420									
Nominal power consumption	kW	16.1	19.4	23.9	28.1	30.7	34.7	39.4	43.8	48.4	48.8
Maximum power consumption	kW	20.1	25.3	30.0	36.1	38.9	44.7	49.9	56.7	61.9	63.8
Nominal current	A	31.0	36.0	42.9	49.5	53.3	64.3	71.4	79.6	86.7	89.9
Maximum current	A	38.5	46.5	53.5	63.1	67.1	76.3	85.0	95.4	104.1	107.3
Maximum starting current	A	145	189	222	231	235	253	308	318	327	330
External fuse (aM)	A	50	50	63	63	80	100	100	125	125	125
Cable section (100 m max.)	mm ²	16	16	25	25	25	35	35	50	50	50

Unit without hydraulic module

AQL SIZES		40	50	60	70	80	90	100	110	120	130
Supply voltage (V / Ph / Hz)		400 / 3+N / 50					400 / 3 / 50				
Permissible voltage		380-420									
Nominal power consumption	kW	15.4	18.7	22.8	27.0	29.6	33.2	37.9	42.0	46.6	47.0
Maximum power consumption	kW	19.4	24.5	28.9	35.0	37.8	43.2	48.4	54.9	60.1	62.0
Nominal current	A	28.9	33.9	39.8	46.4	50.2	60.5	67.6	74.7	81.8	85.0
Maximum current	A	36.4	44.4	50.4	60.0	64.0	72.5	81.2	90.5	99.2	102.4
Maximum starting current	A	142	186	218	228	232	249	304	313	322	325
External fuse (aM)	A	50	50	63	63	80	100	100	125	125	125
Cable section (100 m max.)	mm ²	16	16	25	25	25	35	35	50	50	50

Compressors

AQL SIZES		40	50	60	70	80
Nominal power consumption	kW	7.9 + 6.4	11.2 + 6.4	13.8 + 7.6	13.8 + 11.2	13.8 + 13.8
Maximum power consumption	kW	10 + 8	15 + 8	18 + 10	18 + 15	18 + 18
Nominal current	A	14.3 + 12.2	19.3 + 12.2	23.1 + 14.3	23.1 + 19.3	23.1 + 23.1
Maximum current	A	18 + 16	26 + 16	30 + 18	30 + 26	30 + 30
Crankcase heater	W	70 + 70	70 + 70	70 + 70	70 + 70	70 + 70

AQL SIZES		90	100	110	120	130
Nominal power consumption	kW	17.6 + 13.4	22 + 13.7	23.9 + 15.9	22.2 + 22.2	21.5 + 21.5
Maximum power consumption	kW	24 + 17	29 + 17	29 + 24	29 + 29	29 + 29
Nominal current	A	31.4 + 24.3	38.5 + 24.3	38.5 + 31.4	38.5 + 38.5	38.5 + 38.5
Maximum current	A	38.5 + 29	47 + 29	47 + 38.5	47 + 47	47 + 47
Crankcase heater	W	130 + 75	130 + 75	130 + 130	130 + 130	130 + 130

Standard condenser fans

AQL SIZES		40	50	60	70	80	90	100	110	120	130
Supply voltage (V / Ph / Hz)		400 / 3 / 50									
Number		1	1	1	1	1	2	2	2	2	2
Nominal power consumption	kW	1.1	1.1	1.1	2	2	1.1	1.1	1.1	1.1	2
Nominal current consumption	A	2.4	2.4	2.4	4	4	2.4	2.4	2.4	2.4	4

Standard pumps

AQL SIZES		40	50	60	70	80	90	100	110	120	130
Supply voltage (V / Ph / Hz)		400 / 3 / 50									
Nominal power consumption	kW	0.8	0.8	1.1	1.1	1.1	1.5	1.5	1.8	1.8	1.8
Nominal current consumption	A	2.1	2.1	3.1	3.1	3.1	3.8	3.8	4.9	4.9	4.9

Evaporator heating resistance

AQL SIZES		40	50	60	70	80	90	100	110	120	130
Supply voltage (V / Ph / Hz)		230 / 1 / 50									
Maximum power consumption	W	35	35	35	35	35	35+35	35+35	35+35	35+35	35+35

Performance data

AQL SIZES	OUTDOOR AIR TEMPERATURE (°C)														
	LCWT (°C)	25		30		32		35		40		43		46	
		Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs
40	5	41.9	12.7	40.8	14.0	40.3	14.5	39.5	15.3	36.6	16.7	34.8	17.6	33.0	18.7
	6	43.2	12.8	42.0	14.1	41.5	14.6	40.7	15.4	37.7	16.9	35.9	17.8	34.1	18.8
	7	44.6	12.8	43.4	14.2	42.8	14.7	42.0	15.5	38.9	17.0	37.0	17.9	35.2	18.9
	8	45.9	13.0	44.7	14.3	44.2	14.8	43.4	15.6	40.2	17.1	38.3	18.0	36.4	19.1
	9	47.3	13.1	46.0	14.4	45.5	14.9	44.6	15.7	41.4	17.2	39.4	18.2	37.5	19.2
	10	48.7	13.2	47.5	14.5	46.9	15.0	46.0	15.9	42.7	17.3	40.6	18.4	38.7	19.3
50	5	46.8	15.4	45.4	16.8	44.9	17.4	43.9	18.3	40.4	20.0	38.4	21.0	36.4	22.1
	6	48.2	15.5	46.7	17.0	46.2	17.6	45.2	18.5	41.6	20.2	39.6	21.2	37.5	22.3
	7	49.5	15.7	48.1	17.2	47.5	17.8	46.5	18.7	42.9	20.4	40.7	21.4	38.6	22.6
	8	50.9	15.9	49.5	17.3	48.9	17.9	47.8	18.9	44.1	20.7	42.0	21.7	39.7	22.8
	9	52.3	16.0	50.8	17.5	50.1	18.1	49.1	19.1	45.4	20.9	43.1	21.9	40.9	23.0
	10	53.7	16.2	52.2	17.7	51.5	18.3	50.5	19.3	46.6	21.0	44.4	22.2	42.1	23.3
60	5	56.9	18.8	55.3	20.5	54.7	21.2	53.6	22.3	49.5	24.4	47.1	25.7	44.7	26.9
	6	58.6	18.9	57.0	20.7	56.3	21.4	55.2	22.6	51.1	24.6	48.5	25.9	46.1	27.2
	7	60.4	19.1	58.7	21.0	58.1	21.7	56.9	22.8	52.6	24.9	50.1	26.1	47.4	27.5
	8	62.2	19.4	60.4	21.1	59.7	21.9	58.7	23.0	54.2	25.2	51.5	26.5	48.9	27.8
	9	63.9	19.5	62.3	21.3	61.5	22.1	60.3	23.3	55.8	25.4	53.0	26.7	50.3	28.1
	10	65.8	19.7	64.0	21.5	63.3	22.3	62.1	23.5	57.4	25.7	54.6	27.0	51.7	28.4
70	5	67.6	22.3	65.6	24.3	64.7	25.1	63.4	26.6	58.6	28.9	55.6	30.4	52.6	31.9
	6	69.6	22.3	67.6	24.5	66.7	25.4	65.4	26.8	60.3	29.2	57.3	30.7	54.4	32.2
	7	71.7	22.5	69.6	24.7	68.7	25.6	67.3	27.0	62.2	29.4	59.1	30.9	56.0	32.6
	8	73.8	22.7	71.8	24.9	70.8	25.8	69.4	27.2	64.0	29.7	60.8	31.3	57.7	32.9
	9	75.9	23.0	73.9	25.1	72.9	26.0	71.4	27.4	65.9	30.0	62.7	31.5	59.4	33.1
	10	78.1	23.2	75.9	25.4	75.0	26.3	73.5	27.8	67.9	30.3	64.5	31.8	61.2	33.4
80	5	75.7	24.3	73.6	26.6	72.8	27.6	71.3	29.1	65.9	31.6	62.8	33.3	59.7	35.0
	6	78.0	24.4	75.7	26.8	74.8	27.8	73.3	29.4	67.9	32.0	64.7	33.7	61.4	35.4
	7	80.1	24.7	77.9	27.1	76.9	28.0	75.4	29.6	69.8	32.2	66.5	33.9	63.1	35.7
	8	82.2	24.9	80.0	27.3	79.1	28.3	77.5	29.8	71.7	32.6	68.3	34.3	64.9	36.1
	9	84.5	25.2	82.0	27.6	80.9	28.5	79.2	30.1	73.7	32.8	70.1	34.5	66.7	36.3
	10	86.7	25.4	84.4	27.8	83.3	28.9	81.7	30.4	75.6	33.2	72.0	34.9	68.4	36.7

All the cooling capacity and power consumption values are expressed in kW.

The values indicated in **bold** are based on Eurovent conditions (chilled water inlet/outlet temperatures of 12/7 °C and an outdoor air temperature of + 35 °C).

The power consumption values stated in the table include compressors and fans in operation.

LCWT : Leaving Chilled Water Temperature

Pf : Cooling capacity

Pabs : Power consumption

Performance data (continued)

AQL SIZES	OUTDOOR AIR TEMPERATURE (°C)														
	LCWT (°C)	25		30		32		35		40		43		46	
		Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs	Pf	Pabs
90	5	87.6	28.3	84.7	30.3	83.4	31.2	81.4	32.5	75.4	35.8	71.7	37.9	68.1	40.2
	6	90.2	28.6	87.2	30.7	85.8	31.5	83.8	32.8	77.6	36.2	73.9	38.3	70.1	40.6
	7	92.9	28.9	89.8	31.0	88.5	31.8	86.4	33.2	80.0	36.6	76.2	38.7	72.4	41.0
	8	95.5	29.3	92.5	31.4	91.1	32.2	88.9	33.6	82.4	37.0	78.5	39.1	74.5	41.4
	9	98.4	29.6	95.2	31.7	93.7	32.6	91.5	33.8	84.8	37.3	80.8	39.5	76.8	41.8
	10	101.1	29.9	97.9	32.1	96.4	32.9	94.2	34.2	87.3	37.7	83.1	39.9	79.0	42.2
100	5	99.3	32.3	96.1	34.7	94.7	35.7	92.4	37.2	85.4	40.9	81.3	43.3	77.1	45.8
	6	102.3	32.7	98.9	35.1	97.5	36.1	95.1	37.5	88.0	41.3	83.7	43.7	79.3	46.2
	7	105.2	33.1	101.9	35.5	100.4	36.4	98.0	37.9	90.6	41.7	86.2	44.2	81.7	46.7
	8	108.3	33.5	104.8	36.0	103.3	36.8	100.8	38.4	93.3	42.2	88.8	44.6	84.1	47.1
	9	111.4	33.9	107.7	36.3	106.2	37.3	103.6	38.8	95.9	42.6	91.2	45.0	86.7	47.4
	10	114.4	34.3	110.7	36.7	109.1	37.7	106.6	39.2	98.6	43.0	93.8	45.4	89.0	47.9
110	5	115.2	36.0	111.7	38.5	110.0	39.5	107.6	41.1	99.8	45.3	95.2	47.9	90.5	50.6
	6	118.7	36.4	114.9	39.0	113.3	40.0	110.8	41.5	102.9	45.7	98.1	48.3	93.3	51.2
	7	122.1	36.9	118.3	39.4	116.7	40.5	112.0	42.0	106.1	46.2	101.1	48.9	96.2	51.7
	8	125.6	37.3	121.7	39.9	120.1	41.0	117.4	42.6	109.2	46.7	104.1	49.4	99.1	52.2
	9	129.2	37.7	125.2	40.4	123.5	41.4	120.9	43.1	112.4	47.3	107.2	50.0	102.1	52.7
	10	132.8	38.2	128.8	40.9	127.1	41.9	124.3	43.5	115.5	47.9	110.3	50.6	105.0	53.3
120	5	123.4	39.7	119.8	42.6	118.1	43.8	115.4	45.5	107.2	50.0	102.1	52.8	97.1	55.8
	6	127.1	40.2	123.2	43.1	121.5	44.3	118.9	46.0	110.3	50.6	105.1	53.4	99.9	56.4
	7	130.6	40.7	126.8	43.7	125.1	44.8	122.2	46.6	113.5	51.1	108.2	54.0	102.8	56.9
	8	134.3	41.3	130.4	44.2	128.5	45.4	125.7	47.1	116.7	51.7	111.3	54.6	105.6	57.6
	9	138.1	41.8	134.0	44.8	132.1	46.0	129.2	47.7	119.9	52.3	114.3	55.2	108.7	58.2
	10	141.8	42.4	137.6	45.4	135.8	46.5	132.7	48.3	123.2	53.0	117.4	55.8	111.6	58.9
130	5	131.1	40.3	127.3	43.3	125.6	44.4	122.9	46.1	114.0	50.6	108.7	53.4	103.4	56.4
	6	135.1	40.8	131.2	43.8	129.4	44.9	126.6	46.7	117.7	51.2	112.1	54.0	106.6	57.0
	7	139.3	41.3	135.2	44.3	133.4	45.5	131.0	47.0	121.2	51.7	115.5	54.6	109.8	57.6
	8	143.4	41.8	139.3	44.8	137.3	45.9	134.3	47.7	124.8	52.3	118.9	55.2	113.1	58.2
	9	147.7	42.4	143.4	45.3	141.5	46.5	138.3	48.3	128.4	52.8	122.5	55.7	116.4	58.7
	10	152.0	42.9	147.5	45.8	145.5	47.0	142.4	48.7	132.2	53.4	126.0	56.4	119.7	59.3

All the cooling capacity and power consumption values are expressed in kW.

The values indicated in **bold** are based on Eurovent conditions (chilled water inlet/outlet temperatures of 12/7 °C and an outdoor air temperature of + 35 °C).

The power consumption values stated in the table include compressors and fans in operation.


LCWT : Leaving Chilled Water Temperature

Pf : Cooling capacity

Pabs : Power consumption

Unit external static pressure


Models 40, 50, 60, 70 & 80

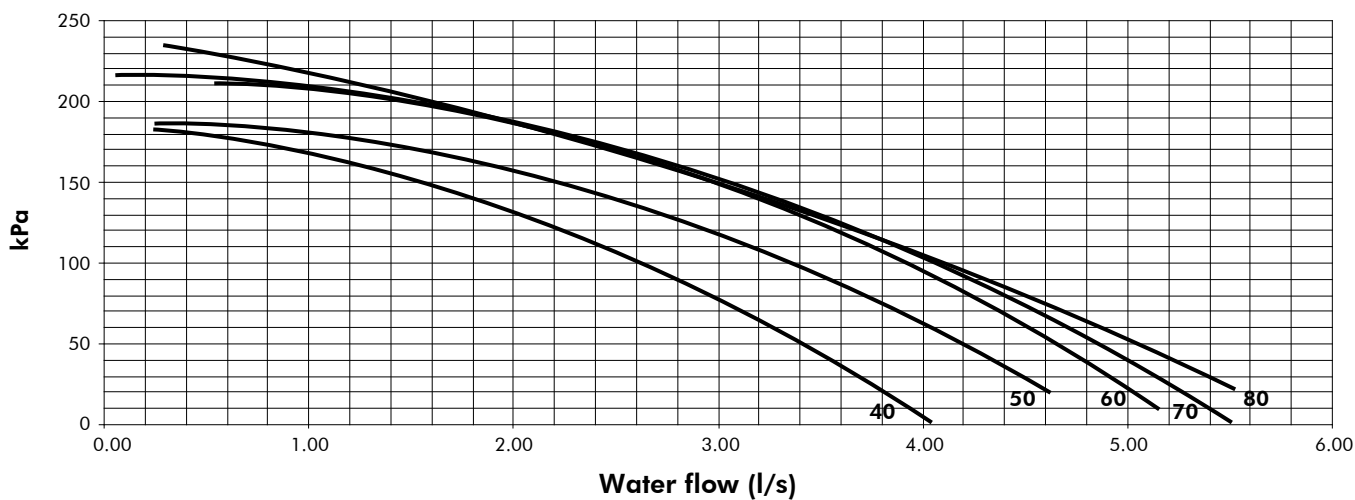

WATER FLOW (l/s)	MODEL 40	MODEL 50	MODEL 60	MODEL 70	MODEL 80
Nominal (1)	2.01	2.22	2.72	3.22	3.60
Minimal (2)	1.34	1.48	1.81	2.14	2.40
Maximal (3)	3.34	3.70	4.53	5.36	6.00

- (1) Eurovent conditions, water : 12/7 °C, air : 35 °C.
- (2) With water ΔT : 7.5 K at nominal capacity.
- (3) With water ΔT : 3 K at nominal capacity.

Models 90 to 130

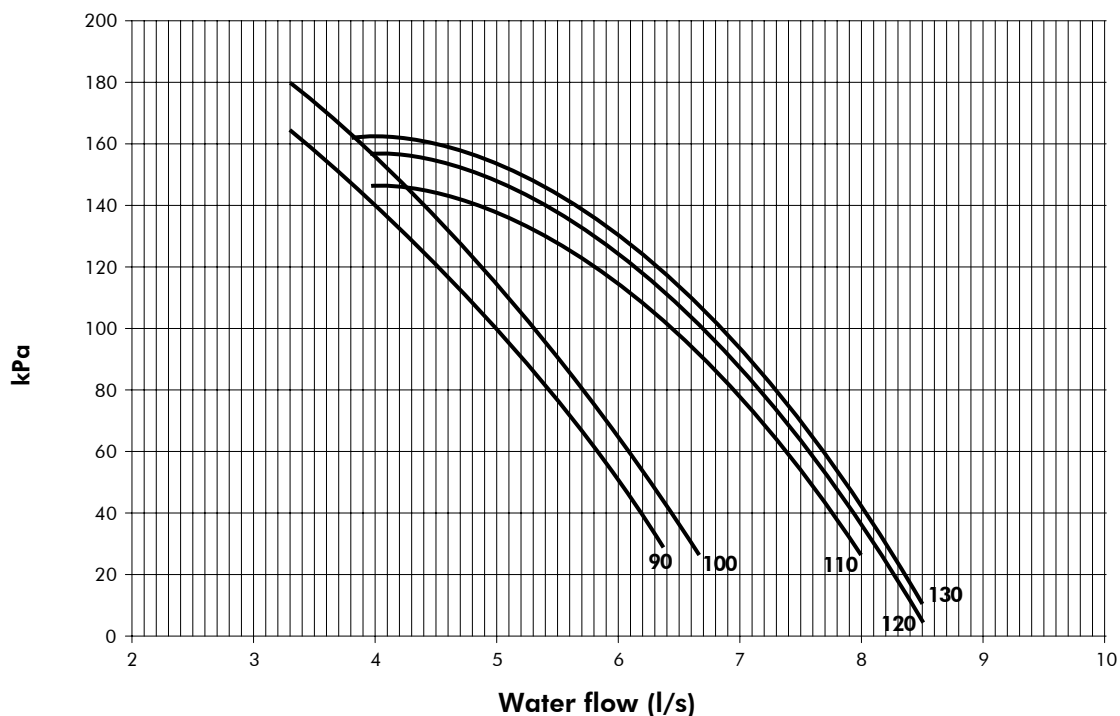


WATER FLOW (l/s)	MODEL 90	MODEL 100	MODEL 110	MODEL 120	MODEL 130
Nominal (1)	4.13	4.68	5.35	5.84	6.26
Minimal (2)	2.75	3.12	3.57	3.89	4.17
Maximal (3)	6.88	7.80	8.92	9.73	10.43


- (1) Eurovent conditions, water : 12/7 °C, air : 35 °C.
- (2) With water ΔT : 7.5 K at nominal capacity.
- (3) With water ΔT : 3 K at nominal capacity.

Heat exchanger water pressure drop


Models 40, 50, 60, 70 & 80

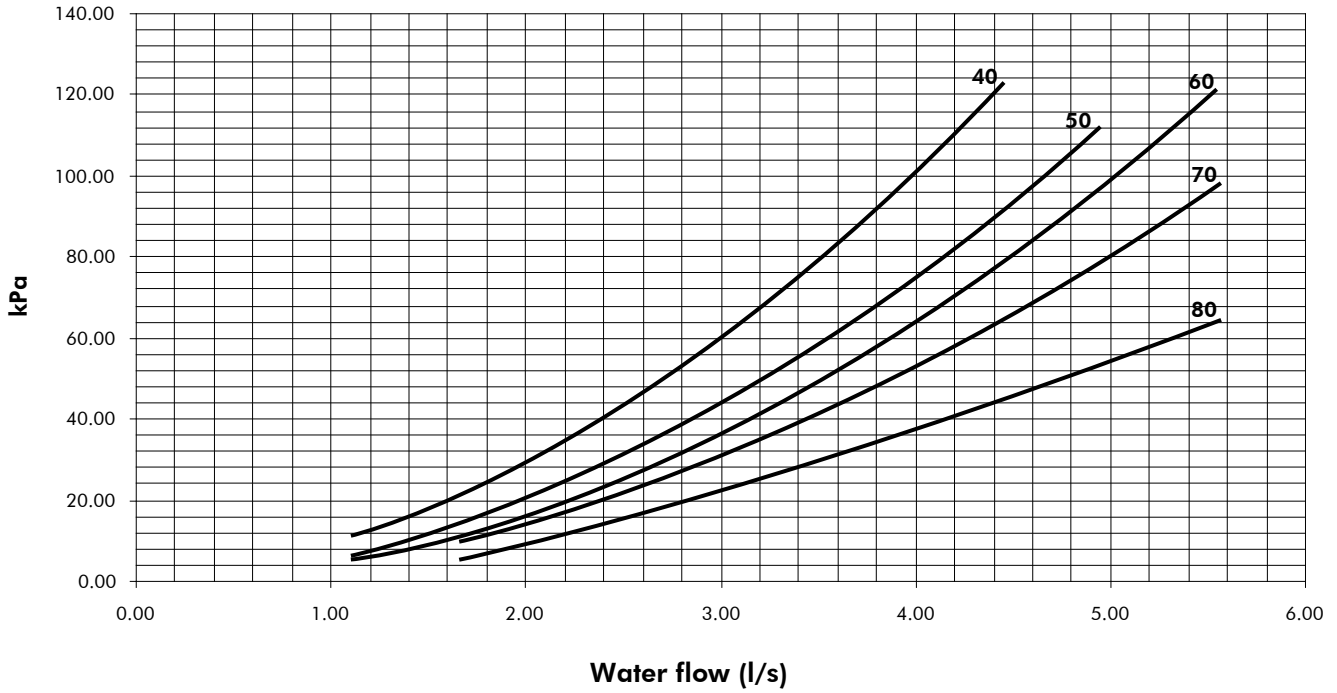


Models 90 to 130

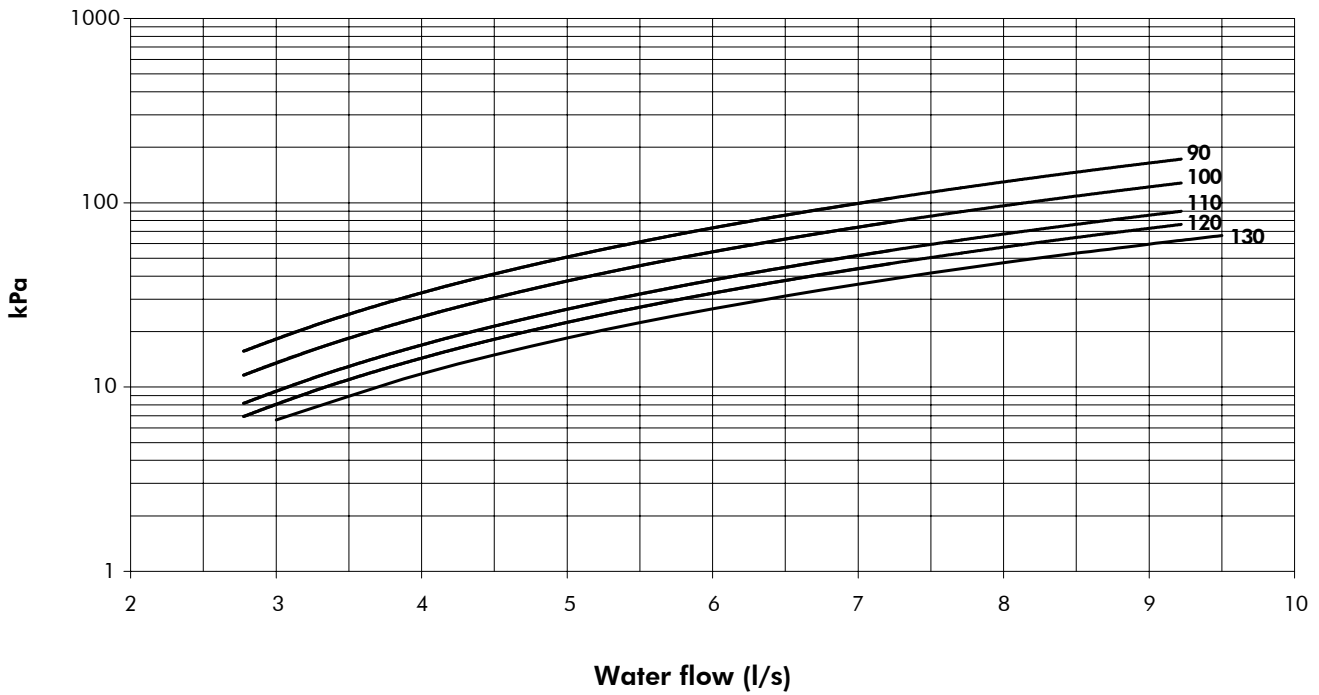


Dimensions - AQL sizes 40 and 50

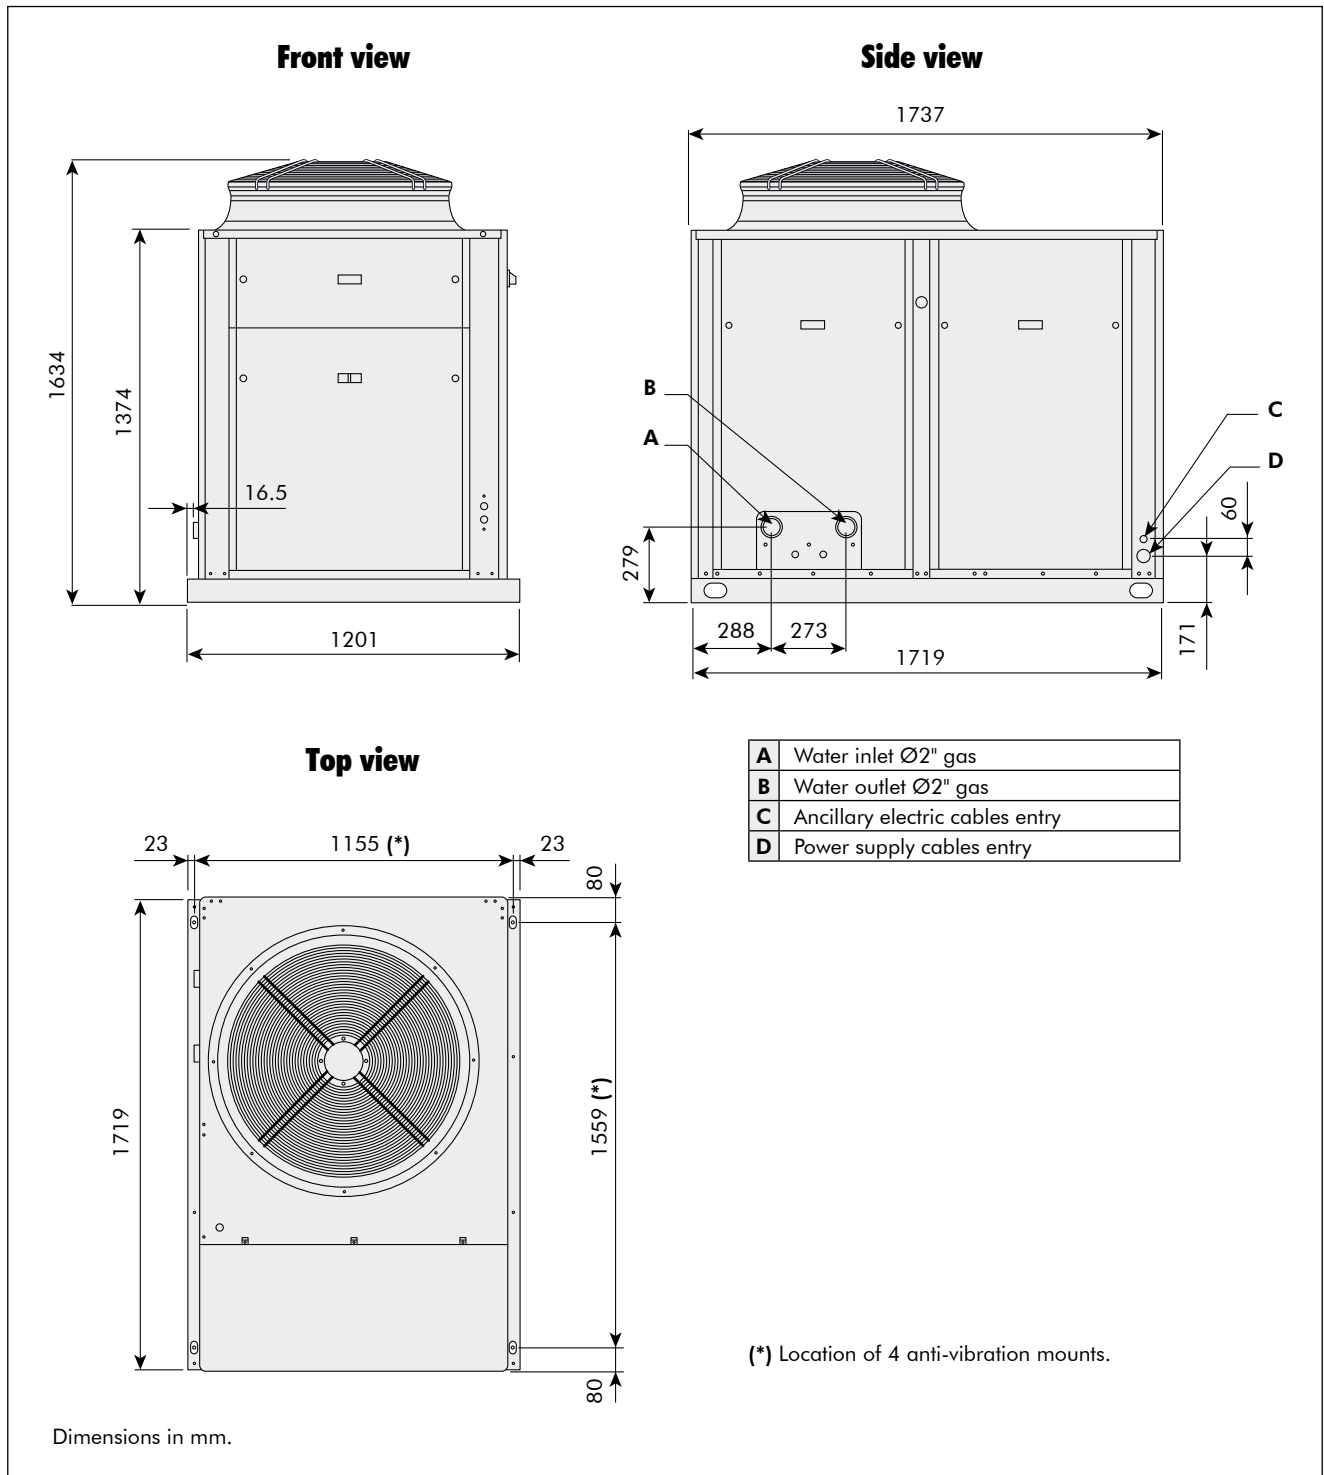


Dimensions - AQL sizes 60, 70 and 80

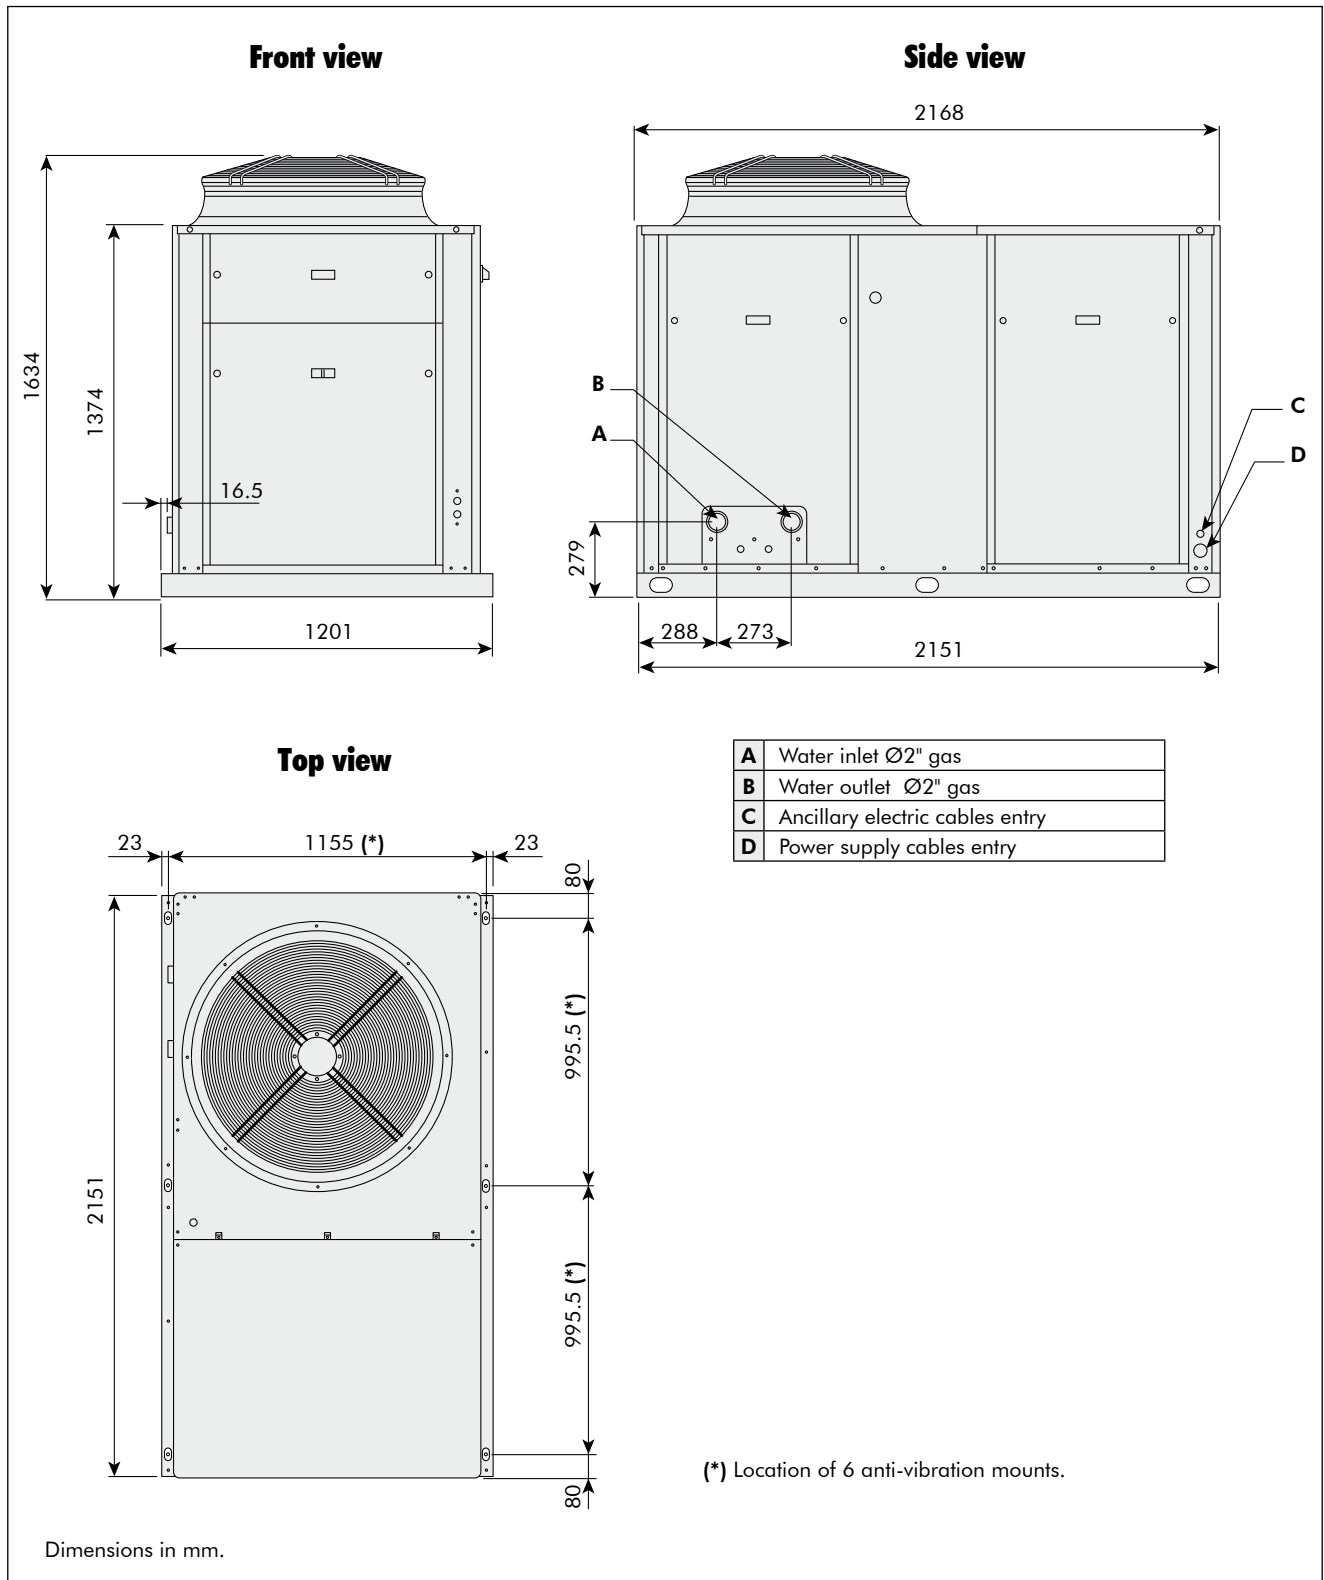

Dimensions - AQL sizes 90 and 100

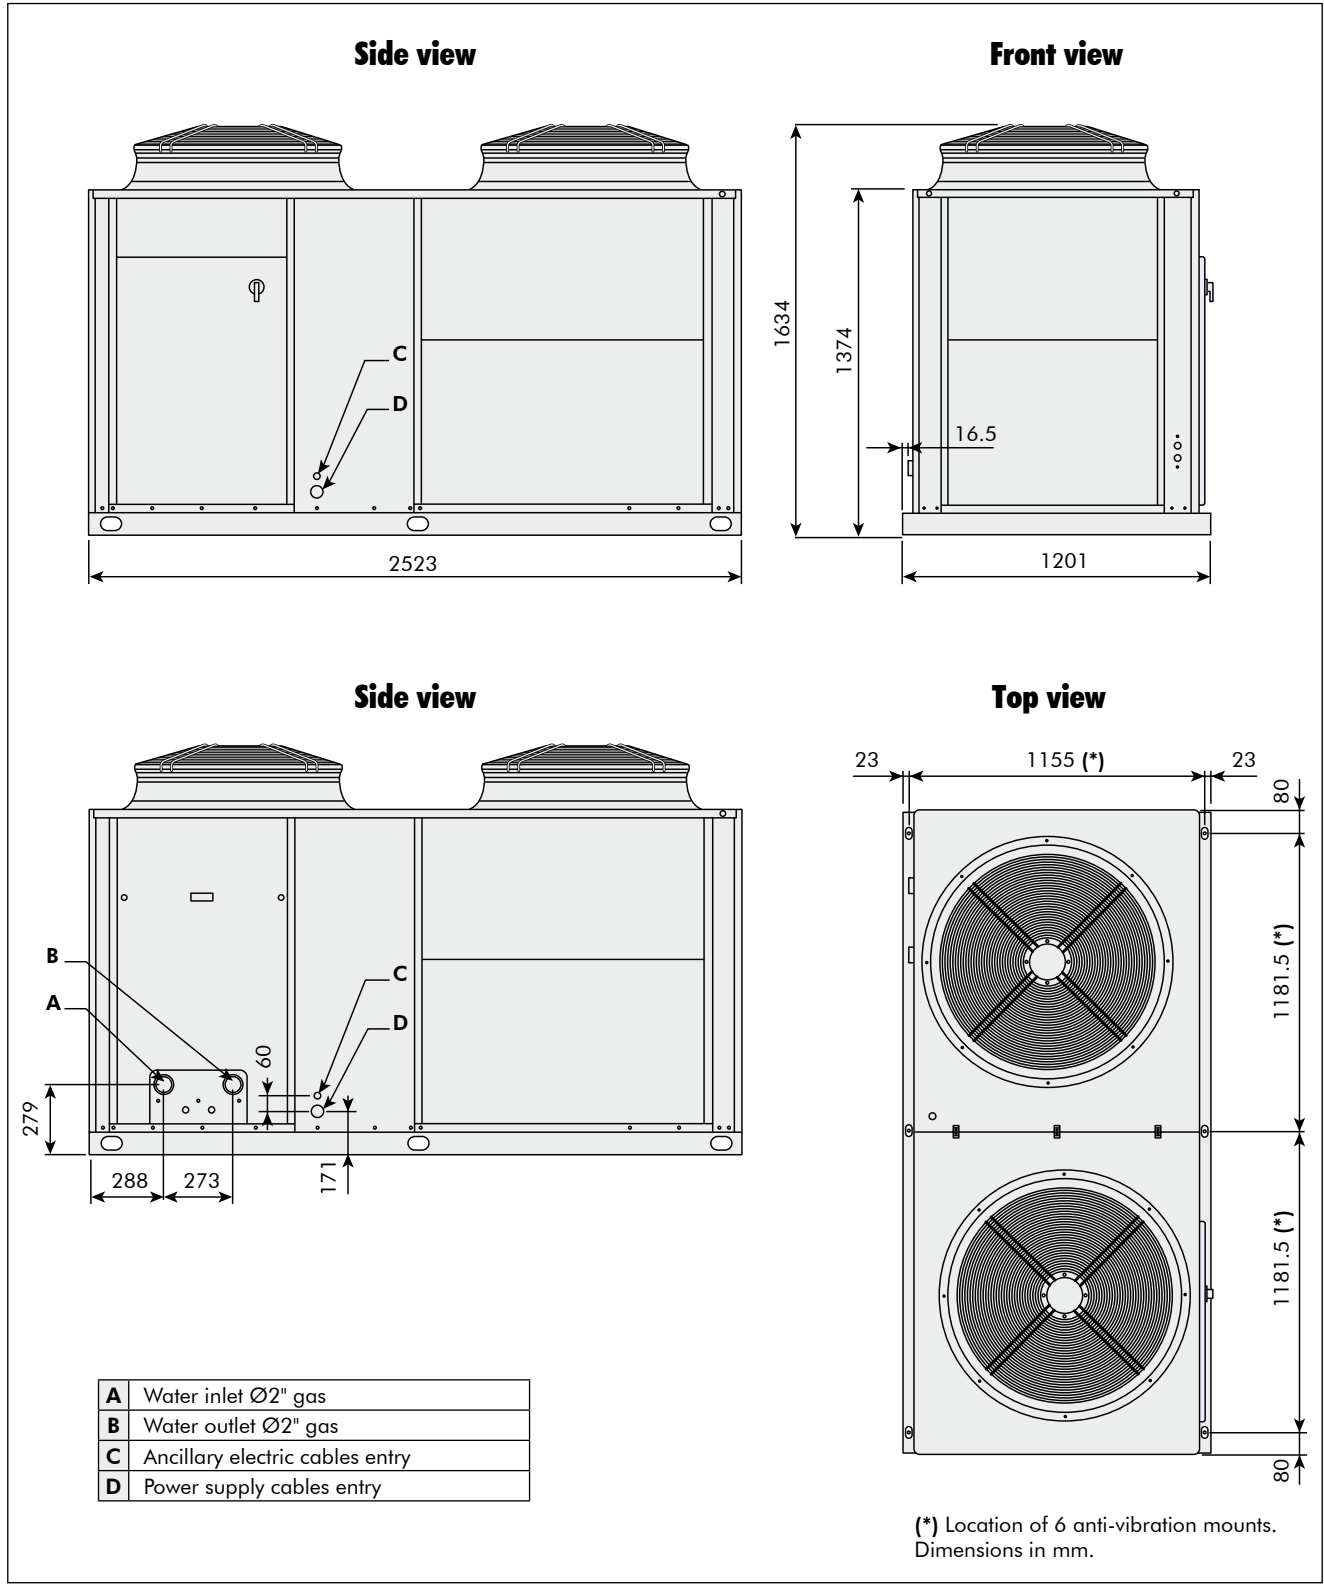

Dimensions - AQL sizes 110, 120 and 130

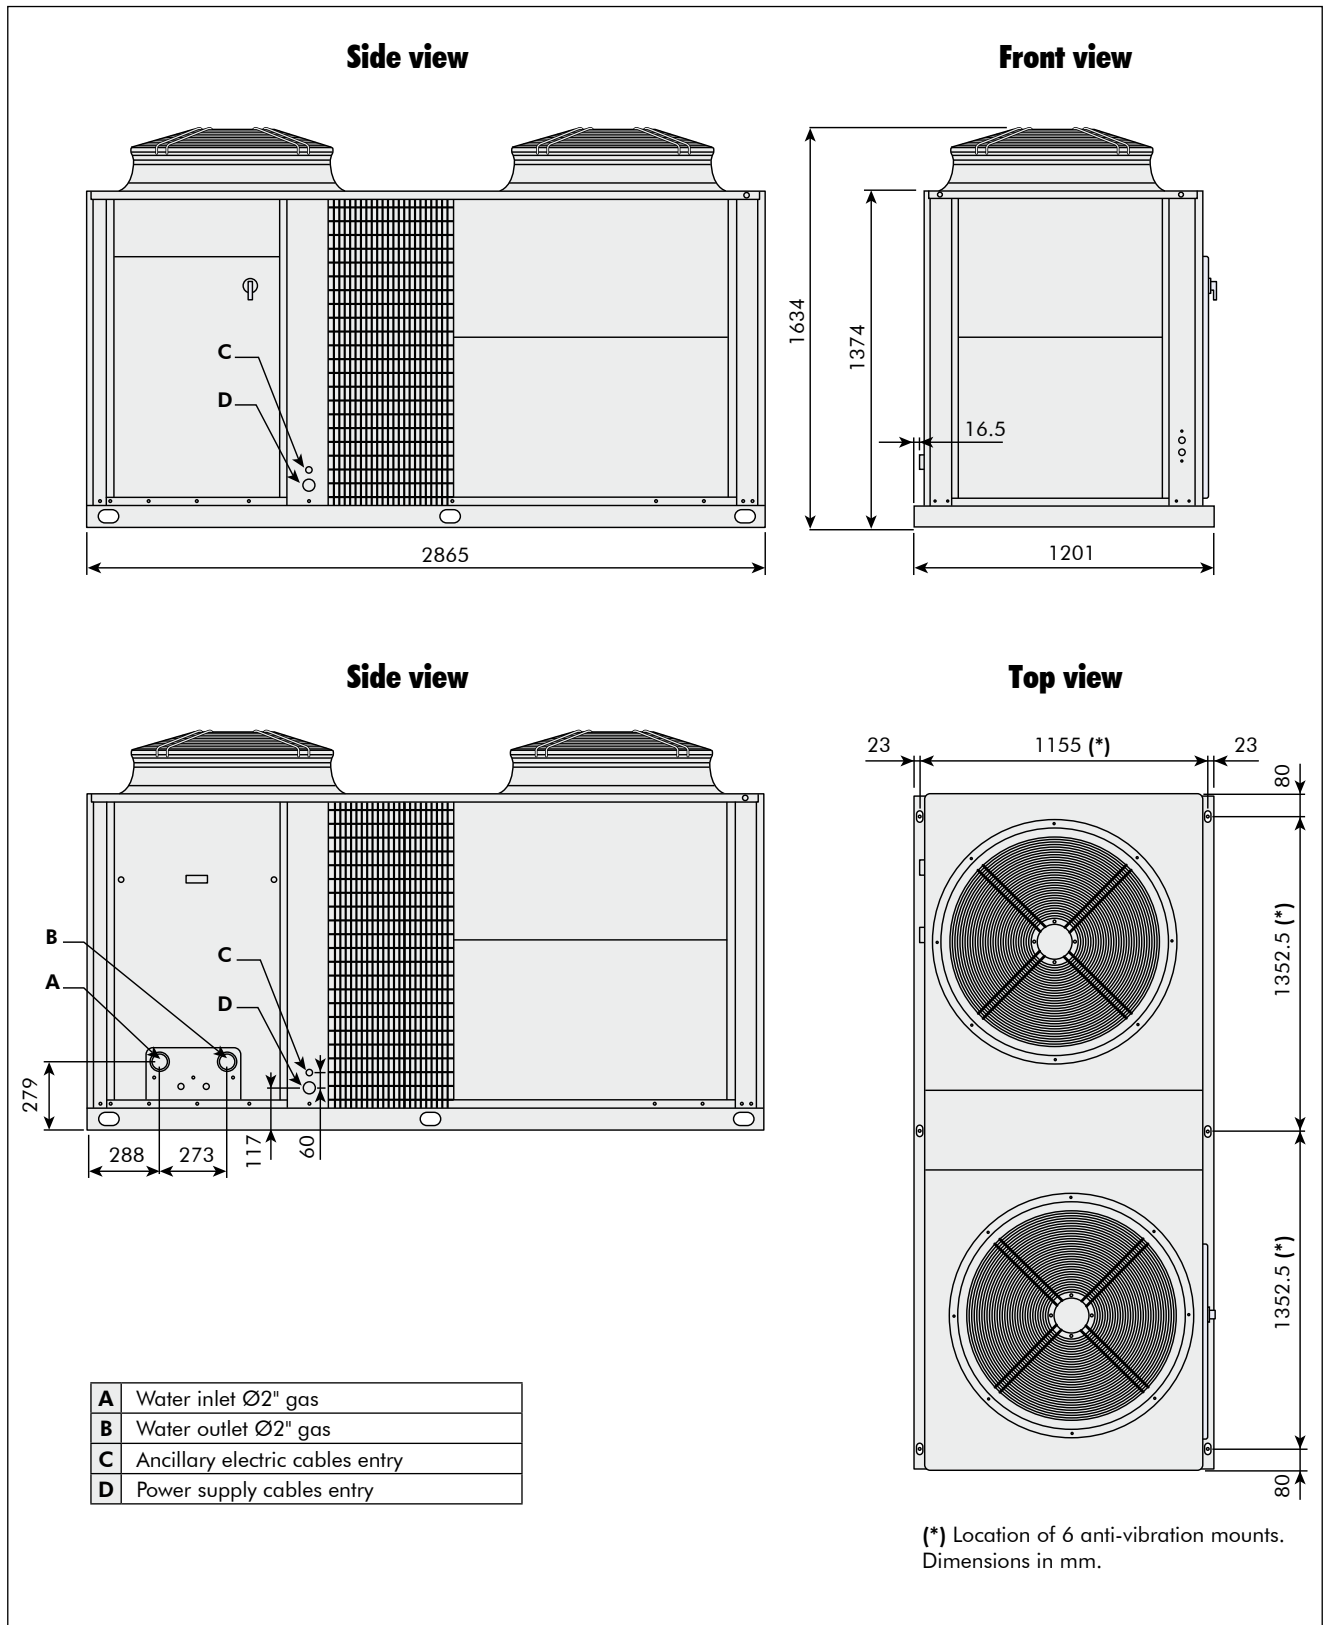

224 and 294-litre water tank kit (optional)

The optional water tank kit, designed to be installed underneath the Aqu@Logic units, is a complete kit where all the hydraulic and electric elements necessary to the correct startup of the system are provided.

This optional water tank kit is completely assembled and tested in factory, and is ready for use after carrying out electric and hydraulic connections.

It is available only for units equipped with integrated hydraulic module.

Features

The water tank kit is composed of two reservoirs, one antifreeze electric heater, one drain valve, one automatic filling valve, one automatic vent valve and one safety valve set to 3 bar.

The antifreeze electric heater allows an operation until an ambient temperature of -10 °C.

It must be wired to the control panel as indicated on the wiring diagram supplied with the unit.

Each reservoir is entirely insulated by a closed cell polyurethane

foam with density of 30 kg/m³. It is located in a galvanized steel casing painted with the same colour as the unit.

The casing is fitted with access panels allowing an easy inspection on internal components.

A spring type antivibration mount kit is available as field-installed option.

Important : It is recommended to use antivibration mounts underneath the units equipped with hydraulic module.

Installation

The optional water tank kits are to be installed underneath the Aqu@Logic units as shown in figures 1 and 2.

The hydraulic connections are to be realized at site outside the machine.

The electrical connections of the antifreeze resistance must be performed in compliance with the wiring diagram supplied with the machine.

Figure 1



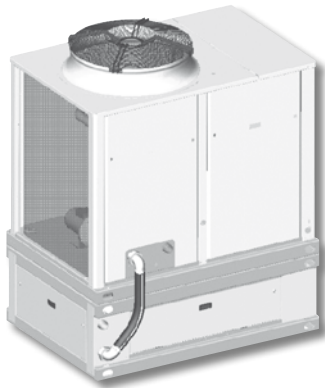



Figure 2

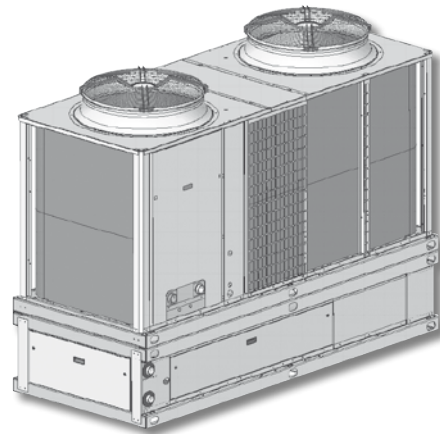


Dimensions - 224-litre water tank kit for AQL 40 and 50

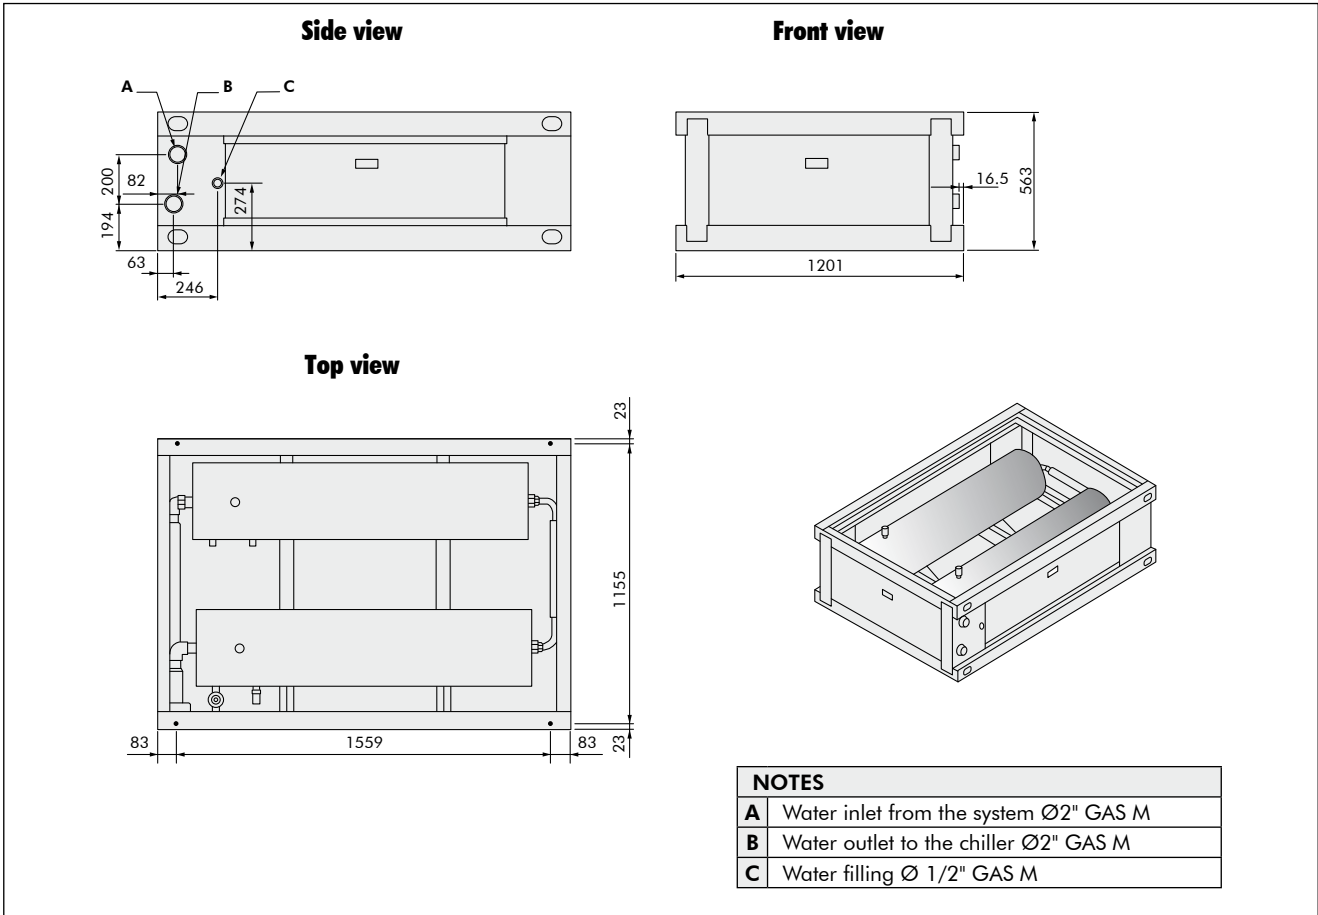


Dimensions - 294-litre water tank kit for AQL 60 to 80

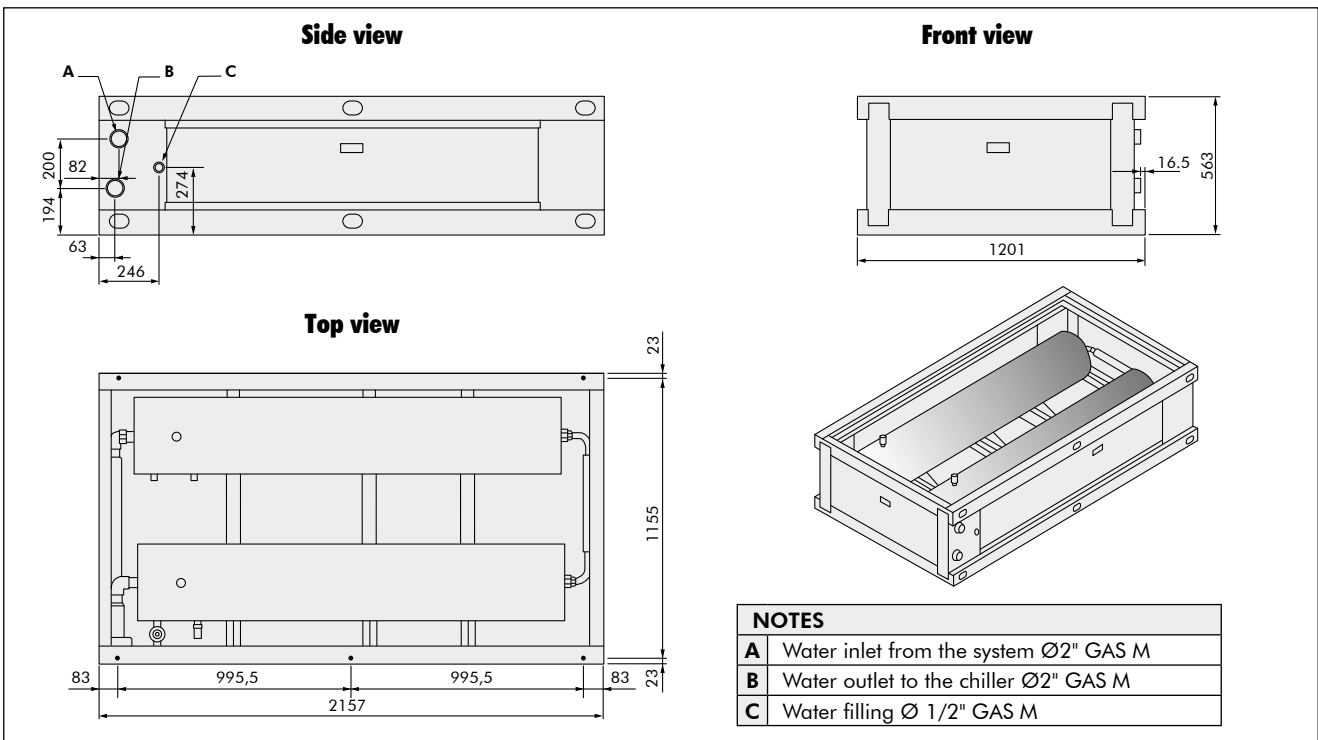

Dimensions - 294-litre water tank kit for AQL 90 and 100

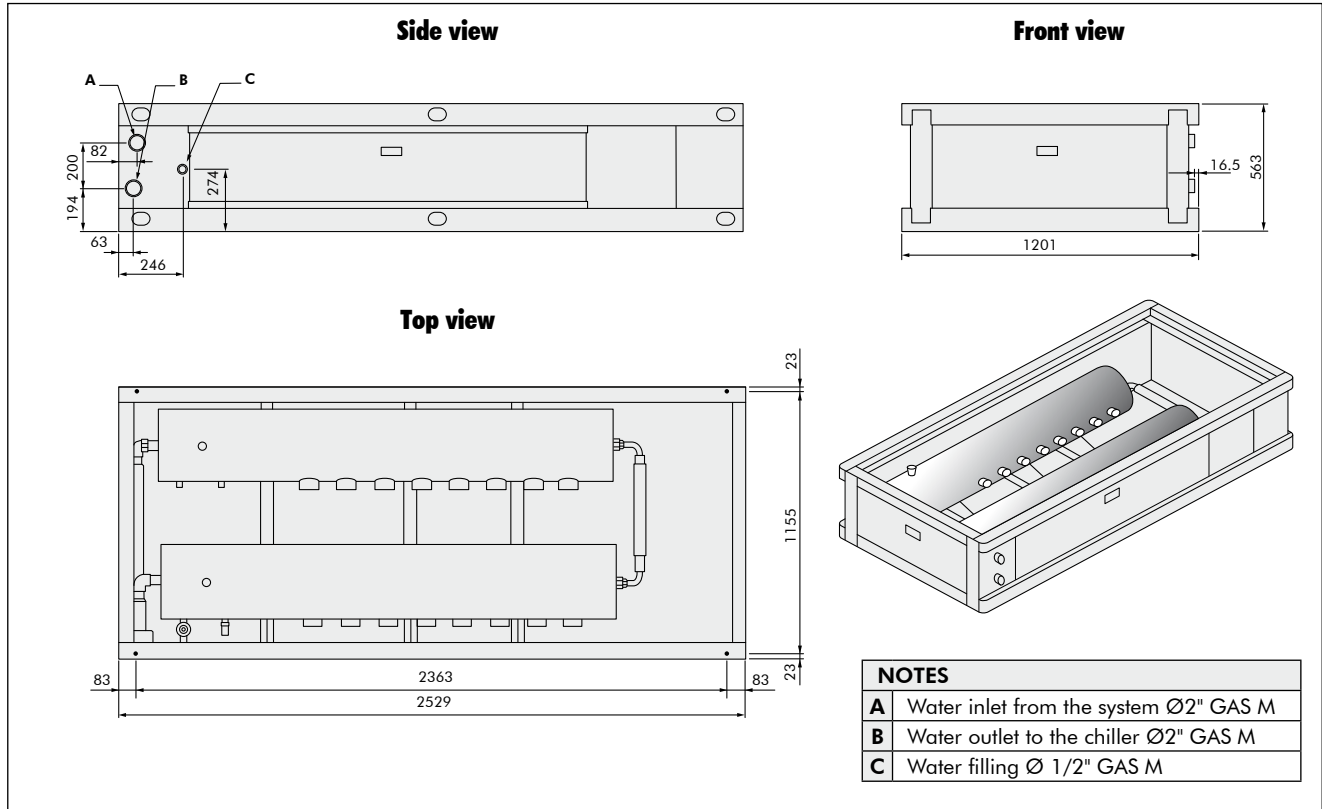


Dimensions - 294-litre water tank kit for AQL 110 to 130

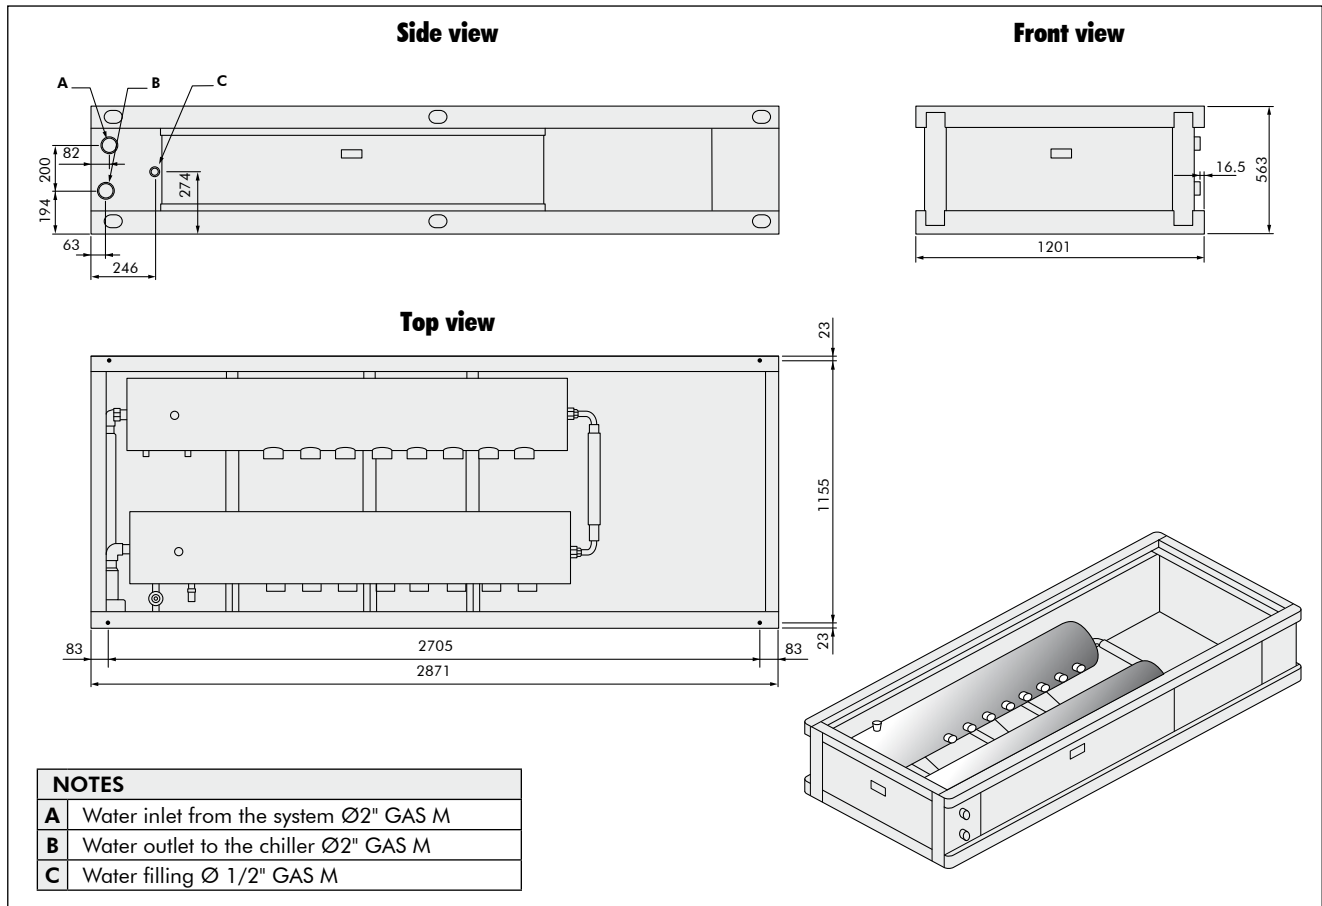


Minimum clearance around the unit

Aqu@Logic AQL 40 to 80

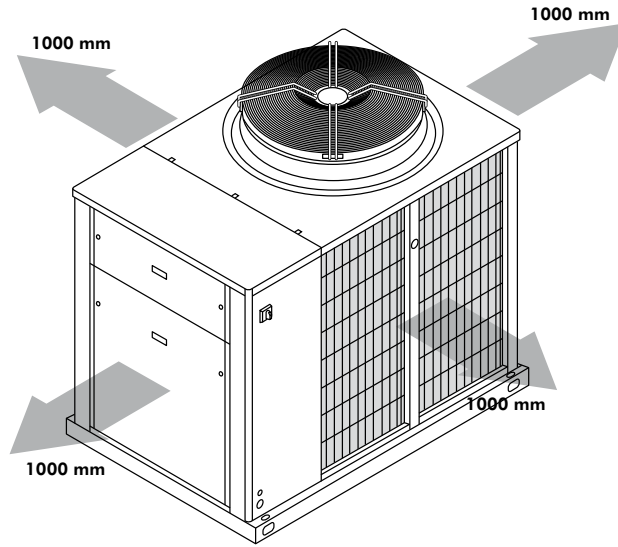

Aqu@Logic AQL 90 to 130

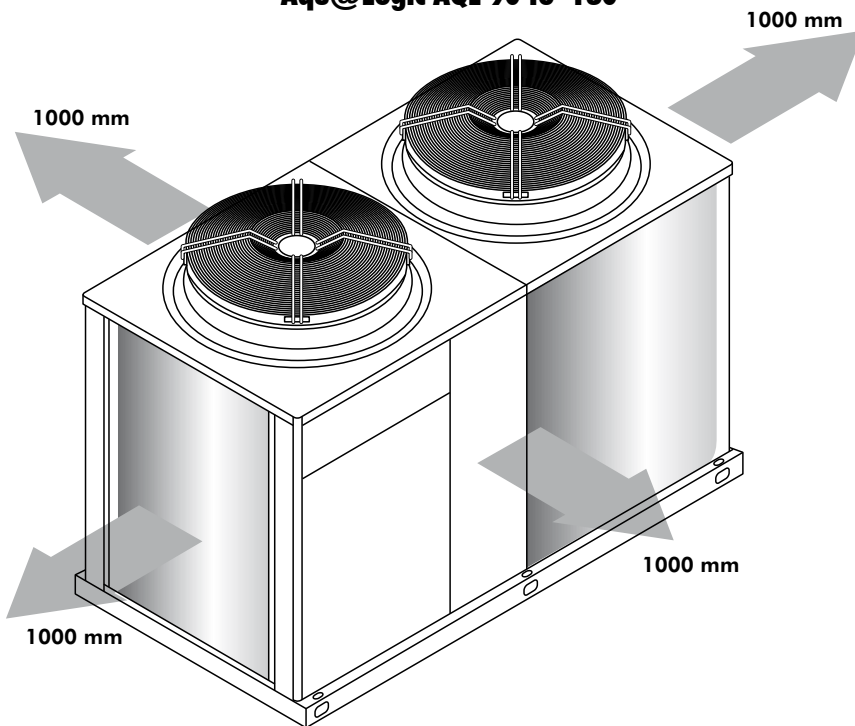

Airwell

ACE Marketing S.A.S.

CAC Export Department
42 cours Jean-Jaurès
17800 Pons - France
Tel. : +33 (0)5 46 92 33 33 - Fax : +33 (0)5 46 91 26 44
www.airwell.com

Your distributor :

As part of our ongoing product improvement programme, our products are subject to change without prior notice. Non contractual photos.