



www.esbe.se



**SERIES CRA120**




NO.1 IN HYDROMIC SYSTEM CONTROL

Modellnr. 9814 03 92 • Rittnrnr. 9212 utg. B • Rev. 1012



Series CRA120

CE  
LVD 2006/95/EC  
EMC 2004/108/EC  
RoHS 2002/95/EEC



**i**

+

3MG, 4MG	3G, 4G	3F, 4F <math>\leq</math> DN50
3HG, 4HG, 3H, 4H	BV	T, TM

**i**

**1**

**2**

**3**

**1**





**i**


**2**

**i**

**1**



**2**

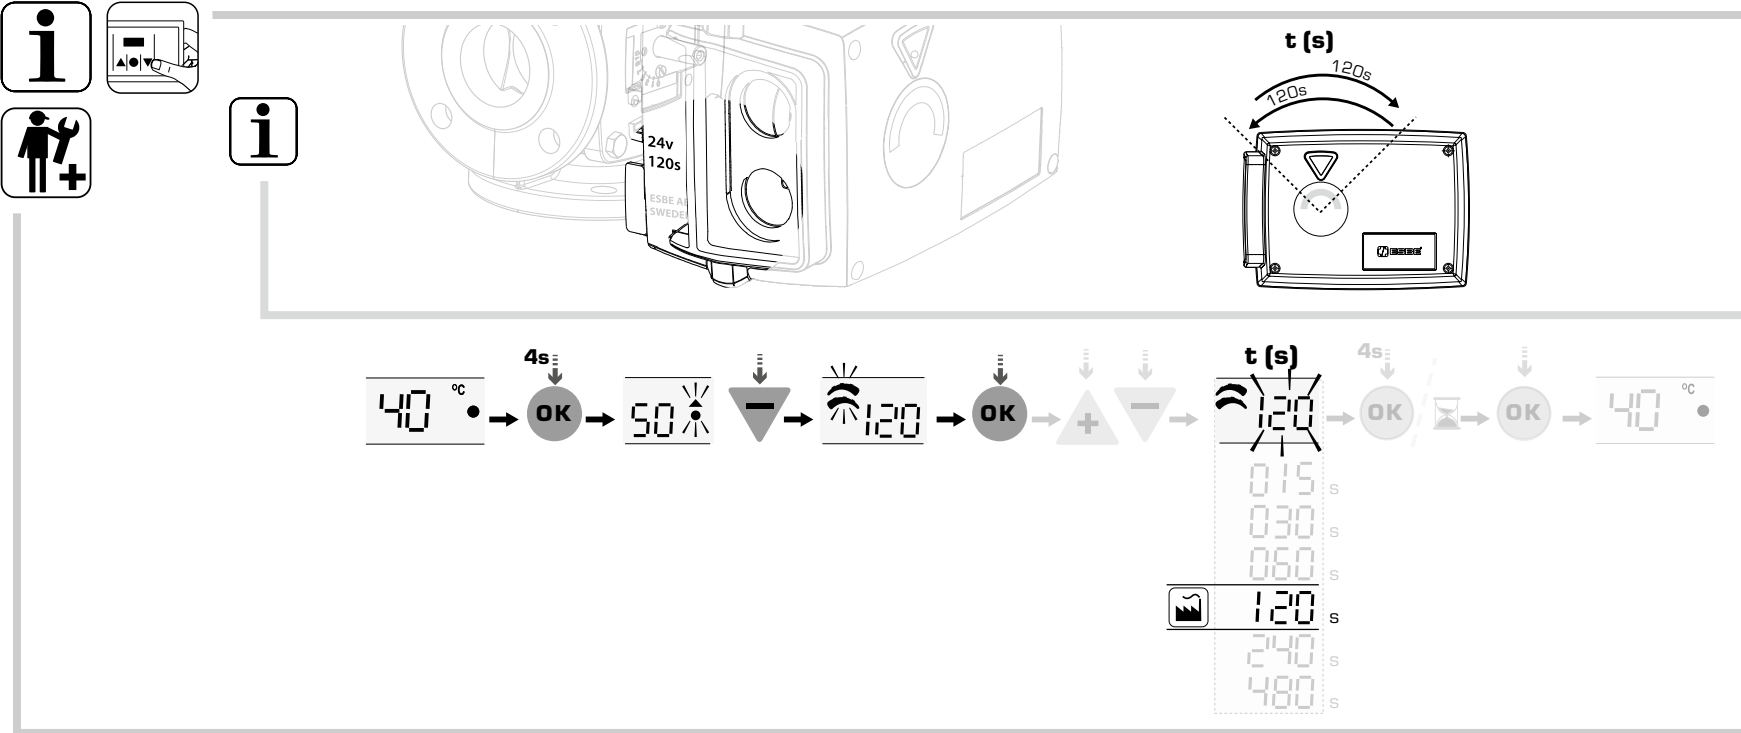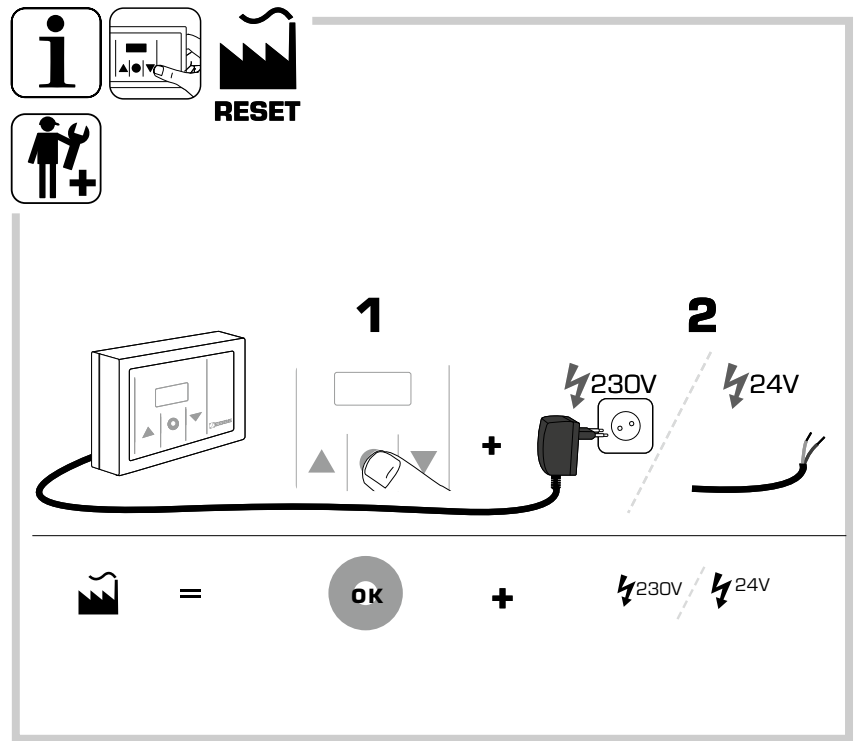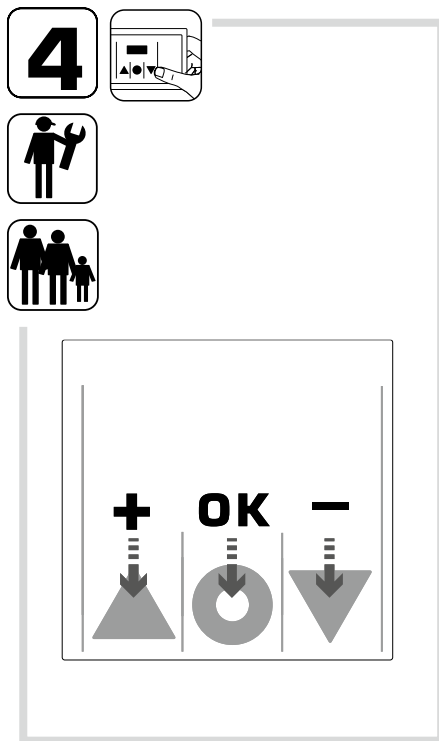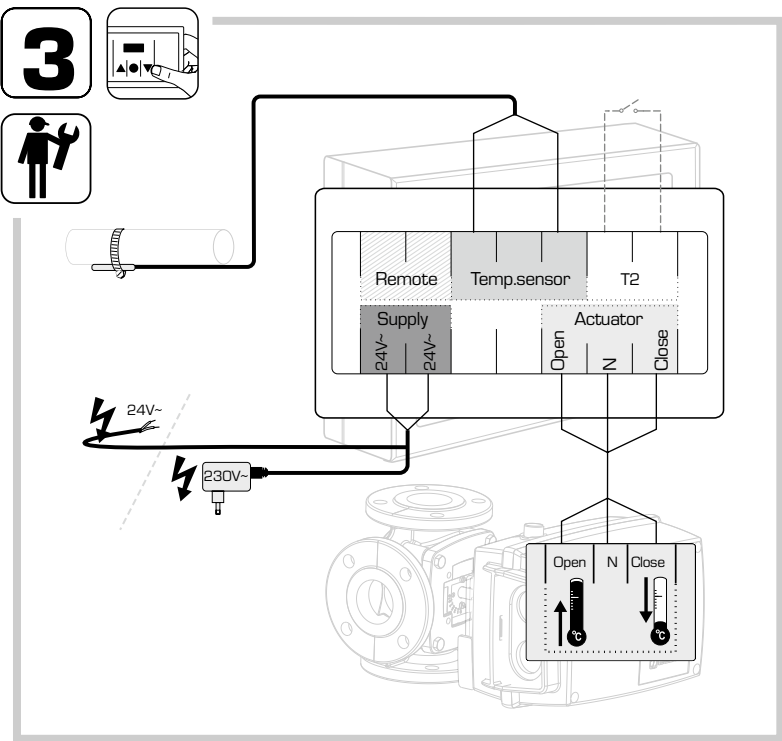





**i**

▲ = MAX °C





	50 °C
	~40 - 50 °C
	~60 - 80 °C
	60 °C


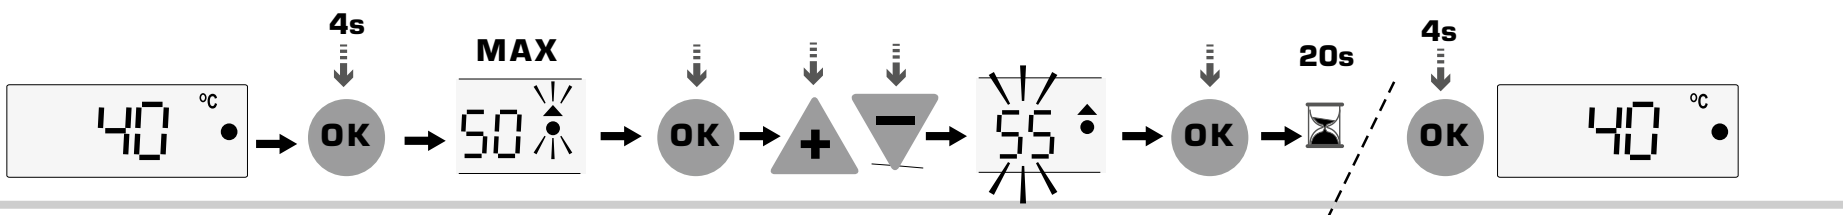


**i**




▼ = MIN °C

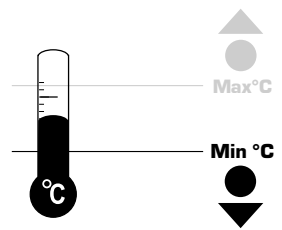





	5 °C
	~5 - 25 °C
	~5 - 25 °C
	~5 - 25 °C

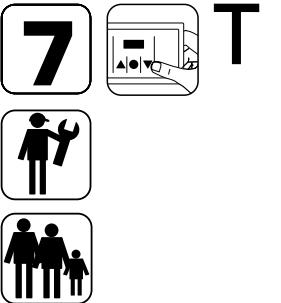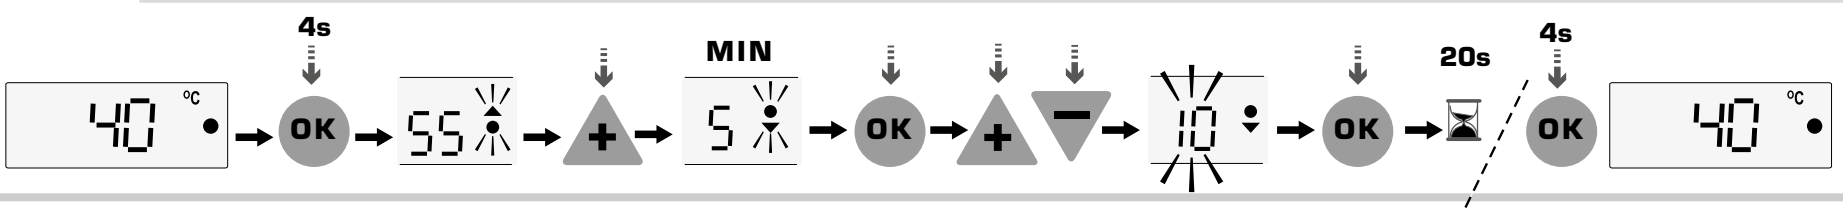



**i**

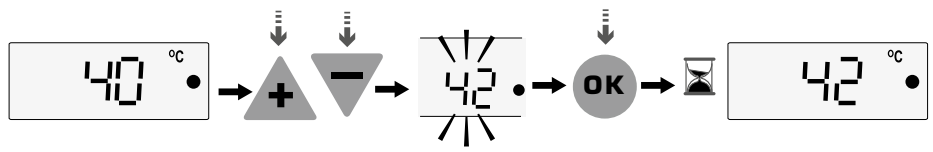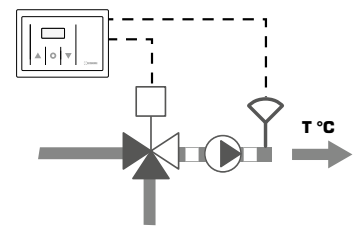

**i** **T2**

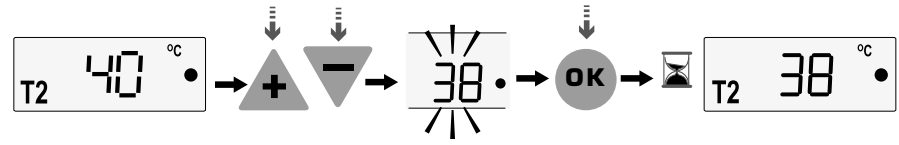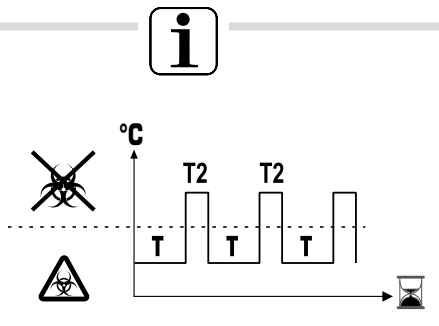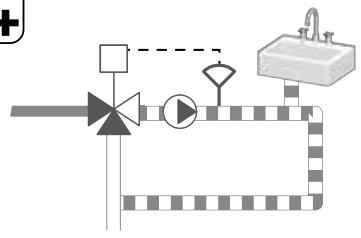

**T**

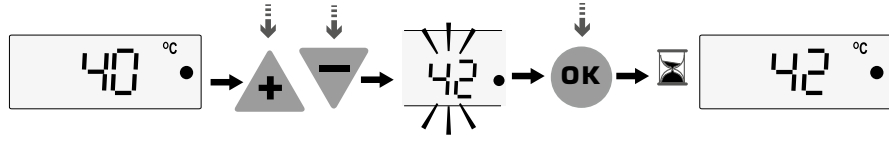


**i**






**1**




**2**

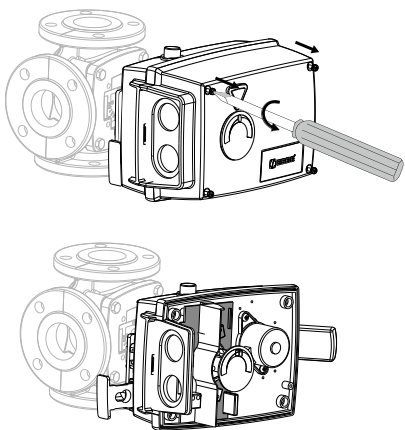

**3**

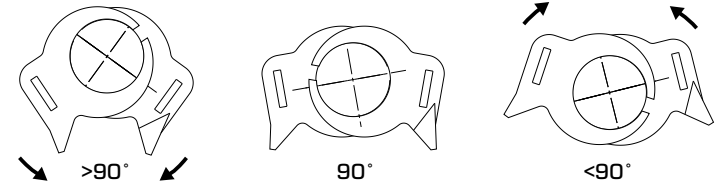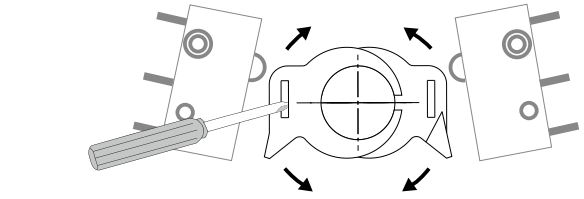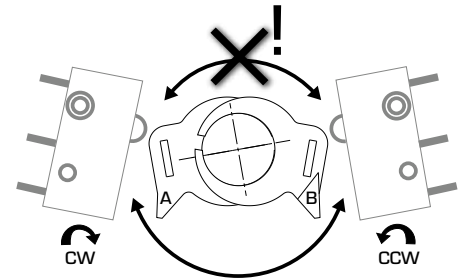

**4**



**5**

