Библиотека СОК



Electric water heaters

New range for sanitary hot water



Baxi SpA has a proud tradition of providing user-friendly technological advanced solutions, offering a complete service and developing products in order to satisfy customers' needs. This is the philosophy that Baxi pursues and that embodies in the huge range of boilers and heating systems that has driven the company towards the leadership in the heating market. Baxi has now introduced a new range of electric water heaters from 10 to 100 liters for the sanitary hot water.

Electric water heaters



- Enamelled steel water tank
- **Temperature regulation with external knob**
- **New ohmic protection system (reduced consumption of the magnesium anode)**
- Polyurethane insulation without CFC and HCFC
- Analogic thermometer (excluding 10-15 litres models)
- Built-in dielectric fitting
- Light indicator
- Grade of protection: IP24


		Storage models					
		V530	V550	V580	V510	0580	0510
Capacity	l	30	50	80	100	80	100
Installation		Upright	Upright	Upright	Upright	Horizontal	Horizontal
Rating/Voltage	W/V	1.200/230	1.200/230	1.200/230	1.500/230	1.500/230	1.500/230
Adjustable thermostat		external	external	external	external	external	external
Thermometer		•	•	•	•	•	•
Height	mm	623	610	854	1018	854	1018
Diameter	mm	338	433	433	433	433	433
Net weight	kg	10,3	16,5	21,5	25	19,8	21,4
Class		C	C	C	C	C	C
Load profile		S	M	L	L	M	L

		Storage models			
		V580 TD	V580 TS	V510 TD	V510 TS
Capacity	l	80	80	100	100
Installation		Thermoelectric upright (right connection)	Thermoelectric upright (left connection)	Thermoelectric upright (right connection)	Thermoelectric upright (left connection)
Rating/Voltage	W/V	1.500/230	1.500/230	1.500/230	1.500/230
Adjustable thermostat		external	external	external	external
Thermometer		•	•	•	•
Height	mm	854	854	1018	1018
Diameter	mm	433	433	433	433
Net weight	kg	26	26	29,5	29,5
Class		C	C	C	C
Load profile		L	L	L	L


		Rapid models			
		R501	R501 SL	R515	R515 SL
Capacity	l	10	10	15	15
Installation		Above sink	Under sink	Above sink	Under sink
Rating/Voltage	W/V	1.200/230	1.200/230	1.200/230	1.200/230
Adjustable thermostat		external	external	external	external
Height	mm	456	456	399	399
Diameter	mm	255	255	338	338
Net weight	kg	6	6	7,4	7,4
Class		B	B	B	B
Load profile		XXS	XXS	XXS	XXS

Rapid

10-15 lt under sink

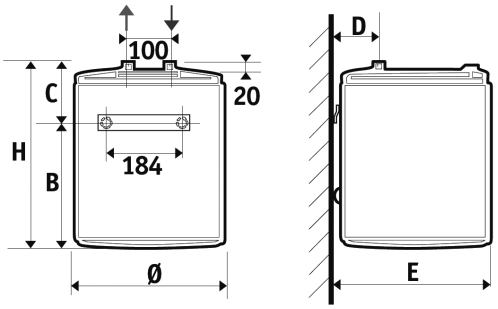


10-15 lt above sink

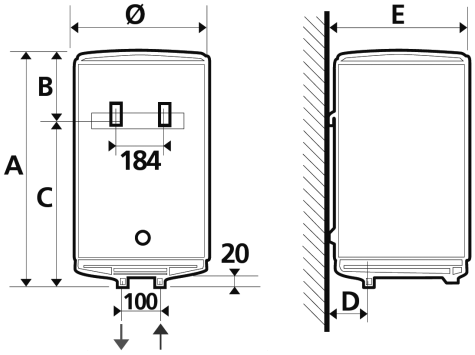


Storage

horizontal 80-100 lt

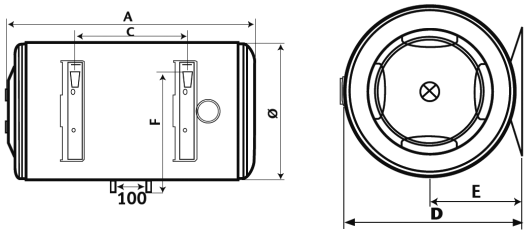

upright 30-50-80-100 lt

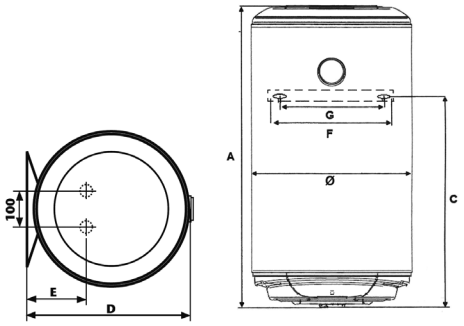

Mod.	Capacity (lites)	A/H	Ø	B	C	D	E	F	G
R 501 SL	10	456	255	238	218	64	262	-	184
R 501	10	456	255	166	290	64	262	-	184
R 515 SL	15	399	338	235	164	81	345	-	184
R 515	15	399	338	163	236	81	345	-	184
V 530	30	623	338	-	423	350	86	100/320	240/272
V 550	50	610	433	-	380	451	165	100/320	240/272
V 580	80	854	433	-	585	451	165	100/320	240/272
V 510	100	1018	433	-	785	451	165	100/320	240/272
O 580	80	854	433	-	395	451	234	365	240/272
O 510	100	1018	433	-	555	451	234	365	240/272
V 580 TD	80	854	433	-	585	451	165	100/320	240/272
V 510 TD	100	1018	433	-	785	451	165	100/320	240/272
V 580 TS	80	854	433	-	585	451	165	100/320	240/272
V 510 TS	100	1018	433	-	785	451	165	100/320	240/272

Dimensions in mm

ISO 9001 - ISO 14001 - OHSAS 18001
Quality
Environment
Safety

Quality
Environment
Safety

are Baxi strategic aims and the awarded certifications ensure compliance with the specific regulations

BAXI 90 YEARS 1925 2015

BAXISPA

36061 BASSANO DEL GRAPPA (VI) - ITALY
Via Trozzetti, 20
marketing@baxi.it
www.baxi.it

The Company assumes no responsibility for any possible contents mistakes, and reserves the right to make changes in products, due to technical or commercial demands, at any time without notice.

Baxi S.p.A. 03-18(E) G