



Gruppo di pressione con 2 pompe verticali multistadio acciaio inox completo di basamento con antivibranti, collettore di aspirazione e di mandata, valvola a sfera, valvola di non ritorno, con o senza 2 serbatoi a membrana.

Quadro elettrico completo di:

- Interruttore generale
- Interruttore magnetotermico

Circuito ausiliario in bassa tensione completo di trasformatore e fusibili di protezione.

**Impieghi:** Per l'approvvigionamento d'acqua con aspirazione da pozzi.

Per aumentare la pressione disponibile da una rete di distribuzione.


*Pressure group with 2 multi multistage stainless steel vertical pumps complete with basement with antivibration device, suction and delivery manifold, ball valve and non-return valve, available with or without 2 membrane tanks.*

*Electric box complete with:*



- general switch
- thermic switch

*Low tension ancillary circuit complete with transformer and protecting cut-outs.*

**Application:** For water supply from wells and to increase pressure from a water system.








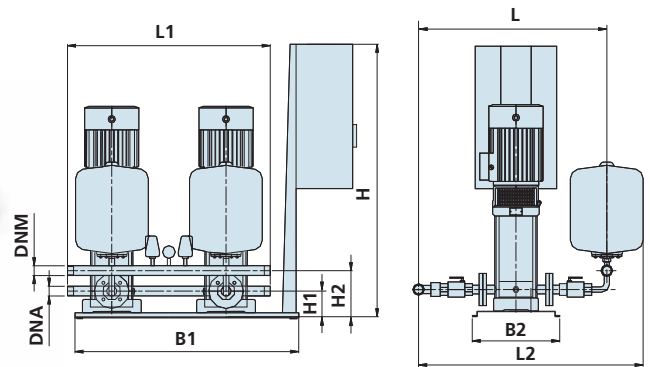


| Monofase<br>Single-phase | Trifase<br>Three-phase | Potenza nominale<br>Nominal power |         | Portata<br>Capacity | Misura<br>Size | Collettori<br>Collector |          | Dimensioni (mm) - Dimensions (mm) |     |      |     |     |     |     |     |  |
|--------------------------|------------------------|-----------------------------------|---------|---------------------|----------------|-------------------------|----------|-----------------------------------|-----|------|-----|-----|-----|-----|-----|--|
|                          |                        | kW                                | HP      |                     |                | DNA                     | DNM      | B1                                | B2  | H    | H1  | H2  | L   | L1  | L2  |  |
| 230V ~ 50Hz              | 230/400V ~ 50Hz        |                                   |         | l/min               | bar            |                         |          |                                   |     |      |     |     |     |     |     |  |
| <b>VSM 2-7</b>           | <b>VS 2-7</b>          | 0,75+0,75                         | 1+1     | 50+50               | 2,5÷4          | G 1" 1/2                | G 1" 1/2 | 800                               | 340 | 990  | 160 | 260 | 650 | 495 | 820 |  |
| <b>VSM 2-11</b>          | <b>VS 2-11</b>         | 1,1+1,1                           | 1,5+1,5 | 60+60               | 3,5÷5          | G 1" 1/2                | G 1" 1/2 | 800                               | 340 | 990  | 160 | 260 | 650 | 495 | 820 |  |
| <b>VSM 4-6</b>           | <b>VS 4-6</b>          | 1,1+1,1                           | 1,5+1,5 | 80+80               | 2,5÷4          | G 2"                    | G 2"     | 800                               | 340 | 990  | 160 | 260 | 670 | 495 | 840 |  |
| <b>VSM 4-8</b>           | <b>VS 4-8</b>          | 1,5+1,5                           | 2+2     | 100+100             | 3,5÷5          | G 2"                    | G 2"     | 800                               | 340 | 990  | 160 | 260 | 670 | 495 | 840 |  |
|                          | <b>VS 4-12</b>         | 2,2+2,2                           | 3+3     | 120+120             | 4÷6            | G 2"                    | G 2"     | 800                               | 340 | 990  | 160 | 260 | 670 | 495 | 840 |  |
|                          | <b>VS 8-6</b>          | 2,2+2,2                           | 3+3     | 120+120             | 3,5÷5          | G 2" 1/2                | G 2" 1/2 | 1100                              | 500 | 1040 | 240 | 350 | 740 | 495 | 900 |  |
|                          | <b>VS 8-8</b>          | 3+3                               | 4+4     | 140+140             | 4÷6            | G 2" 1/2                | G 2" 1/2 | 1100                              | 500 | 1040 | 240 | 350 | 740 | 495 | 900 |  |
|                          | <b>VS 8-10</b>         | 4+4                               | 5,5+5,5 | 150+150             | 5÷7            | G 2" 1/2                | G 2" 1/2 | 1100                              | 500 | 1040 | 240 | 350 | 740 | 495 | 900 |  |
|                          | <b>VS 8-15</b>         | 5,5+5,5                           | 7,5+7,5 | 160+160             | 6,5÷8          | G 2" 1/2                | G 2" 1/2 | 1100                              | 500 | 1040 | 240 | 350 | 740 | 495 | 900 |  |
|                          | <b>VS 8-19</b>         | 7,5+7,5                           | 10+10   | 200+200             | 6,5÷8          | G 2" 1/2                | G 2" 1/2 | 1100                              | 500 | 1040 | 240 | 350 | 740 | 495 | 900 |  |

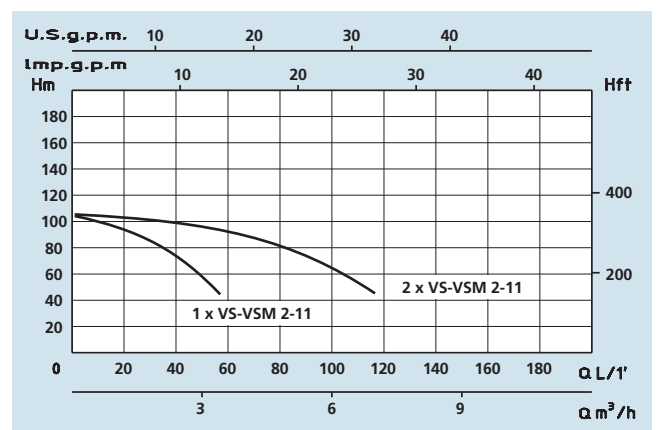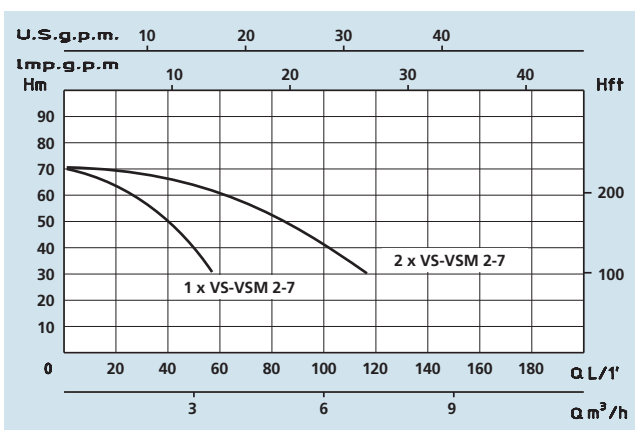

# GRUPPI CON POMPE VERTICALI MULTISTADIO ACCIAIO INOX PRESSURE SYSTEM WITH MULTISTAGE STAINLESS STEEL VERTICAL PUMPS

# VS

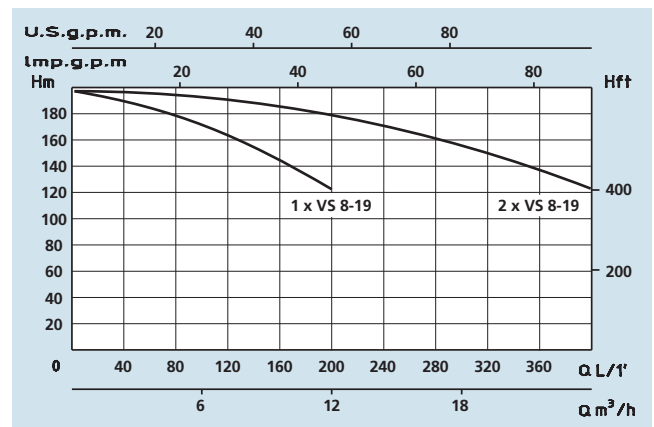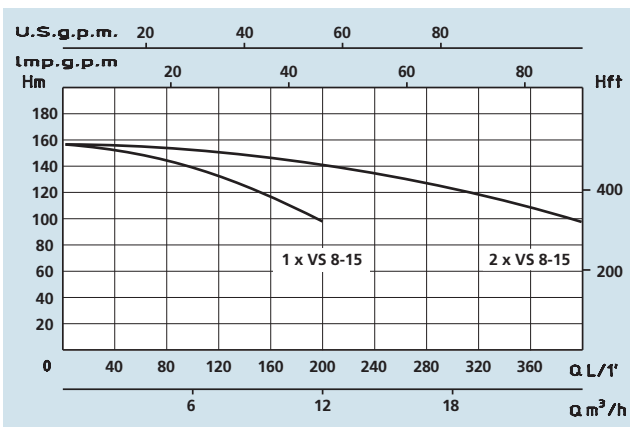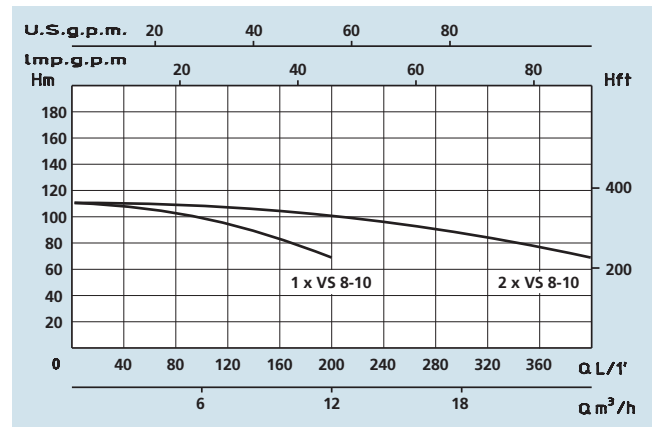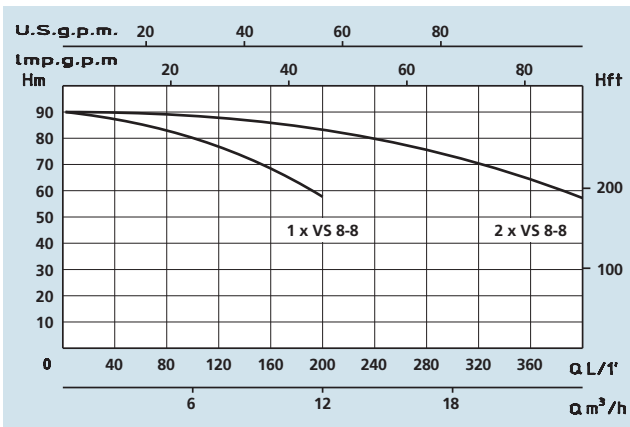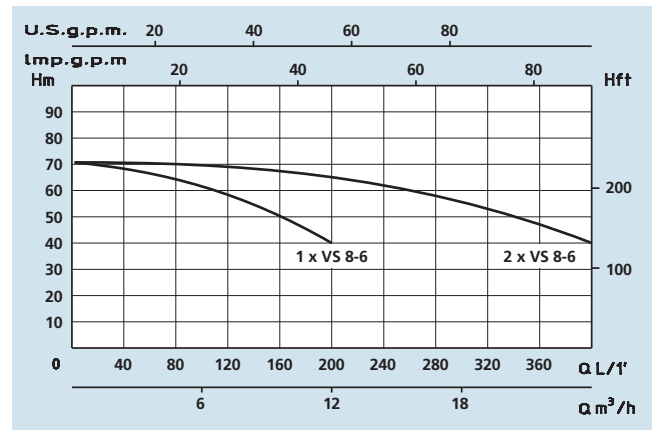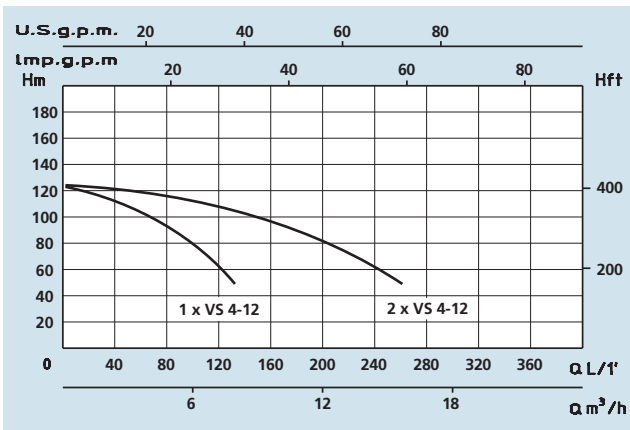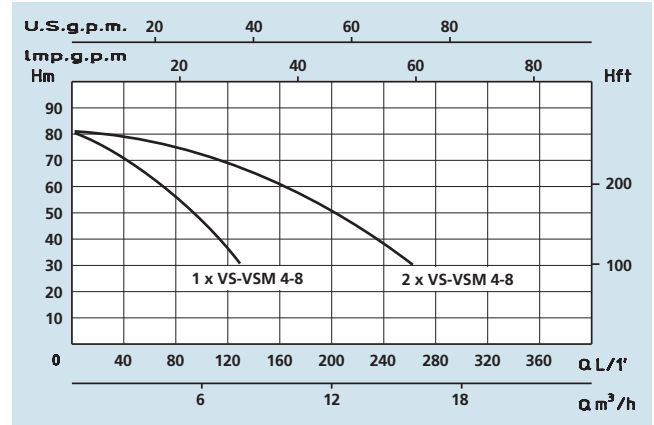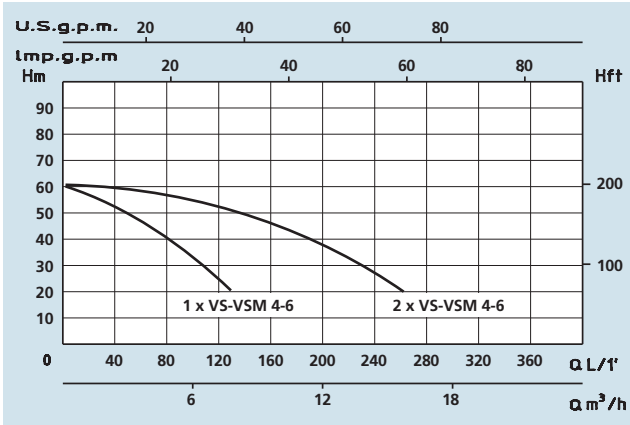



Gruppo di pressione con 2 pompe verticali multistadio acciaio inox completo di basamento con antivibranti, collettore di aspirazione e di mandata, valvola a sfera, valvola di non ritorno, con o senza 2 serbatoi a membrana.

Quadro elettrico completo di:

- Interruttore generale
- Interruttore magnetotermico

Circuito ausiliario in bassa tensione completo di trasformatore e fusibili di protezione.

**Impieghi:** Per l'approvvigionamento d'acqua con aspirazione da pozzi.

Per aumentare la pressione disponibile da una rete di distribuzione.


*Pressure group with 2 multi multistage stainless steel vertical pumps complete with basement with antivibration device, suction and delivery manifold, ball valve and non-return valve, available with or without 2 membrane tanks.*

*Electric box complete with:*



- general switch
- thermic switch

*Low tension ancillary circuit complete with transformer and protecting cut-outs.*

**Application:** For water supply from wells and to increase pressure from a water system.

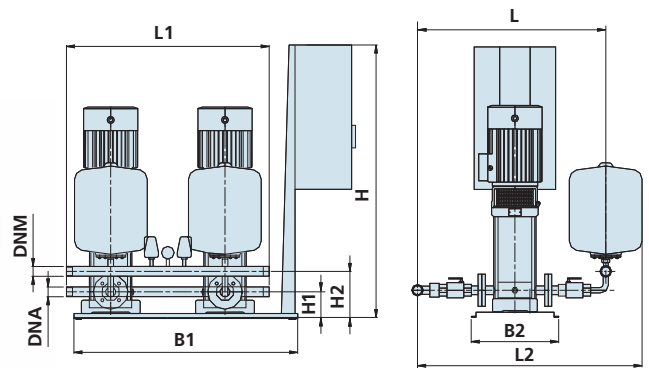

| Trifase<br>Three-phase | Potenza nominale<br>Nominal power |         | Portata<br>Capacity | Misura<br>Size | Collettori<br>Collector |         | Dimensioni (mm) - Dimensions (mm) |     |      |     |     |     |     |      |
|------------------------|-----------------------------------|---------|---------------------|----------------|-------------------------|---------|-----------------------------------|-----|------|-----|-----|-----|-----|------|
|                        | kW                                | HP      |                     |                | DNA                     | DNM     | B1                                | B2  | H    | H1  | H2  | L   | L1  | L2   |
| 230/400V ~ 50Hz        |                                   |         | l/min               | bar            |                         |         |                                   |     |      |     |     |     |     |      |
| <b>VS 16-4</b>         | 4+4                               | 5,5+5,5 | 140+140             | 2,5÷4          | G 3"                    | G 2"1/2 | 1100                              | 500 | 1040 | 250 | 360 | 760 | 495 | 920  |
| <b>VS 16-6</b>         | 5,5+5,5                           | 7,5+7,5 | 160+160             | 3,5÷5          | G 3"                    | G 2"1/2 | 1100                              | 500 | 1040 | 250 | 360 | 760 | 495 | 920  |
| <b>VS 16-8</b>         | 7,5+7,5                           | 10+10   | 200+200             | 4÷6            | G 3"                    | G 2"1/2 | 1100                              | 500 | 1040 | 250 | 360 | 760 | 495 | 920  |
| <b>VS 20-5</b>         | 5,5+5,5                           | 7,5+7,5 | 300+300             | 3,5÷5          | G 3"                    | G 2"1/2 | 1100                              | 500 | 1040 | 250 | 360 | 760 | 495 | 920  |
| <b>VS 20-7</b>         | 7,5+7,5                           | 10+10   | 300+300             | 4÷6            | G 3"                    | G 2"1/2 | 1100                              | 500 | 1040 | 250 | 360 | 760 | 495 | 920  |
| <b>VS 20-10</b>        | 11+11                             | 15+15   | 350+350             | 6,5÷8          | G 3"                    | G 2"1/2 | 1100                              | 500 | 1040 | 250 | 360 | 760 | 495 | 920  |
| <b>VS 32-4</b>         | 7,5+7,5                           | 10+10   | 250+250             | 4÷6            | G 4"                    | G 4"    | 1100                              | 500 | 1040 | 280 | 390 | 800 | 495 | 960  |
| <b>VS 32-5</b>         | 11+11                             | 15+15   | 300+300             | 5÷7            | G 4"                    | G 4"    | 1100                              | 500 | 1040 | 280 | 390 | 800 | 495 | 960  |
| <b>VS 32-6</b>         | 11+11                             | 15+15   | 350+350             | 6,5÷8          | G 4"                    | G 4"    | 1100                              | 500 | 1040 | 280 | 390 | 800 | 495 | 960  |
| <b>VS 42-3</b>         | 11+11                             | 15+15   | 400+400             | 5÷7            | G 6"                    | G 6"    | 1100                              | 500 | 1040 | 320 | 430 | 850 | 495 | 1010 |

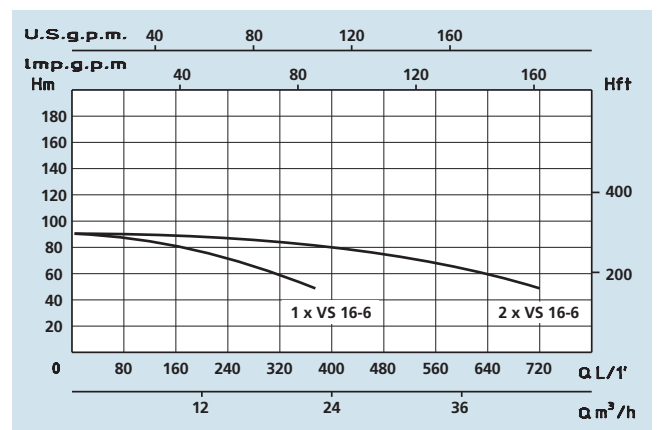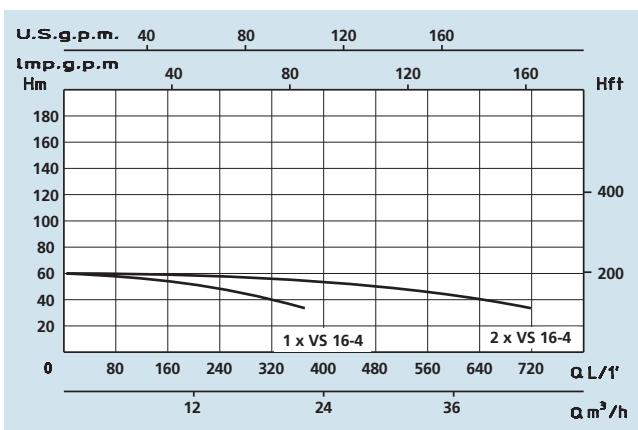

# GRUPPI CON POMPE VERTICALI MULTISTADIO ACCIAIO INOX PRESSURE SYSTEM WITH MULTISTAGE STAINLESS STEEL VERTICAL PUMPS

# VS

