

 **Ball valves**
Check valves


 *Vannes à bille - Clapets de retenue*

 *Шаровые и обратные клапаны*

 *Supape cu bilă - Supapa de retinere*

 *Válvulas de esfera - Válvulas Antiretorno*

 *Kugelventile - Rückschlagventile*

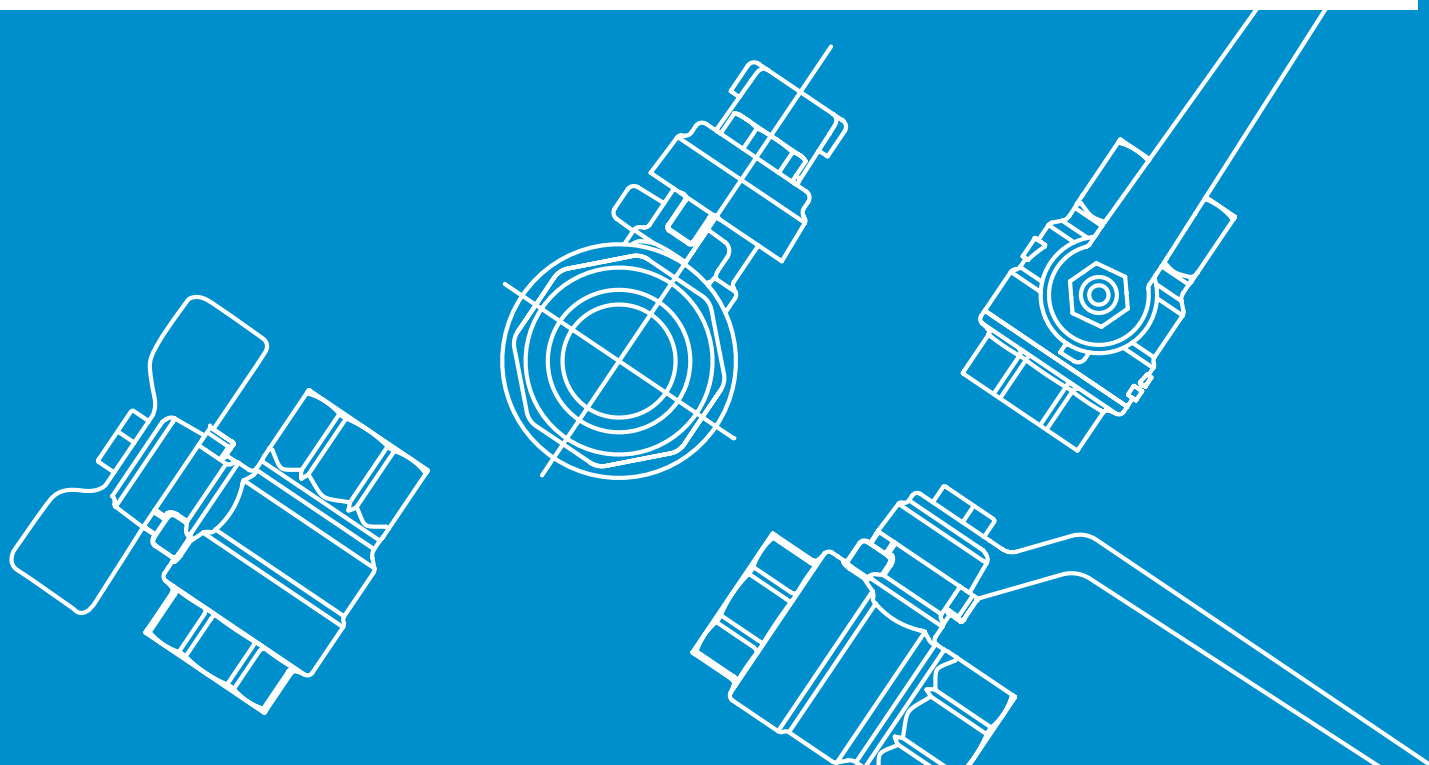

5



gnutti sebastiano & figli








Sferika 



gnutti sebastiano & figli

 **GAS BALL VALVES**

-  *VANNES À BILLE GAZ*
-  *ШАРОВЫЙ КРАН ДЛЯ ГАЗА*
-  *SUPAPE CU BILĂ GAZ*
-  *VÁLVULAS DE ESFERA GAS*
-  *KUGELVENTILE FÜR GAS*

A  "Rio-gas" GS gas range



A



**Full bore gas ball valve with pressure plug, FF connections.
Suitable for Gas Family 1-2-3**

Nickel plated brass body
Thick chrome plated brass ball
Original PTFE seal
NBR internal OR gaskets
External OR gasket in FKM (viton)
Threaded connections ISO 7 (UNI EN 10226)
Pressure plug threaded connection F 1/4"

- Operating temperature -20 ÷ +60°C

- Full bore gas ball valve with pressure plug, FF connections
- Vanne à bille passage intégral pour gaz avec prise de pression, raccords FF
- Полнопроходной шаровый кран для газа со штуцерами для измерения давления, вн.- вн. резьба
- Supapă cu bilă cu trecere totală pentru gaz cu priză de presiune, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con toma de presión y con palomilla, paso total para gas
- Kugelventil Volldurchfluss für Gas mit Steckanschluss, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	MOP MOP MOP MOP MOP MOP	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2163.05.00	3/4"	5	12,36	10
2163.06.00	1"	5	18,73	5

- EN 331



049

**Full bore gas ball valve with lever handle, FF connections.
Suitable for Gas Family 1-2-3**

Nickel plated brass body
Thick chrome plated brass ball
Original PTFE seals
NBR internal OR gaskets
External OR gasket in FKM (viton)
Threaded connections UNI-EN-ISO 228 - ISO 7 (UNI EN 10226)

- Operating temperature -20 ÷ +60°C

- Full bore gas ball valve, with lever handle, FF connections
- Vanne à bille passage intégral pour gaz, avec poignée à levier, raccords FF
- Шаровый полнопроходной кран для газа с ручкой-рычагом, вн.- вн. резьба
- Supapă cu bilă cu trecere totală pentru gaz, cu manetă tip levier, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palanca en acero con revestimiento, paso total para gas
- Kugelventil Volldurchfluss für Gas mit Hebelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	MOP MOP MOP MOP MOP MOP	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3329 38GI	3/8"	5	6,73	10
3329 12GI	1/2"	5	6,96	10
3329 34GI	3/4"	5	10,10	5
3329 10GI	1"	5	14,33	4
3329 04GI	1"1/4	5	19,23	4
3329 02GI	1"1/2	5	29,80	2
3329 20GI	2"	5	42,64	2

- EN 331
- P.E.D. 97/23/CE



049

**Full bore gas ball valve, with lever handle, FF connections.
Suitable for Gas Family 1-2-3**

Nickel plated brass body
Thick chrome plated brass ball
PTFE seals
Threaded connections UNI-EN-ISO 228 - ISO 7 (UNI EN 10226)

- Operating temperature -20 ÷ +60°C

- Full bore gas ball valve, with lever handle, FF connections
- Vanne à bille passage intégral pour gaz, avec poignée à levier, raccords FF
- Шаровый полнопроходной кран для газа с ручкой-рычагом, вн.- вн. резьба
- Supapă cu bilă cu trecere totală pentru gaz, cu manetă tip levier, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palanca en aluminio, paso total para gas
- Kugelventil Volldurchfluss für Gas mit Hebelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	MOP MOP MOP MOP MOP MOP	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3371 22G	2"1/2	5	120,81	8
3371 30G	3"	5	180,87	6
3371 40G	4"	5	203,95	4

- P.E.D. 97/23/CE



049

Full bore gas ball valve, with butterfly handle, FF connections. Suitable for Gas Family 1-2-3

Nickel plated brass body
 Thick chrome plated brass ball
 Original PTFE seal
 NBR internal OR gaskets
 External OR gasket in FKM (viton)
 Threaded connections ISO 7 (UNI EN 10226)

- Operating temperature -20 ÷ +60°C



- EN 331
 - P.E.D. 97/23/CE



049

- Full bore gas ball valve, with butterfly handle, FF connections
- Vanne à bille passage intégral pour gaz, avec poignée papillon, raccords FF
- Шаровый полнопроходной кран для газа с ручкой-бабочкой, вн.-вн. резьба
- Supapă cu bilă cu trecere totală pentru gaz, cu manetă tip fluture, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palomilla en aluminio, paso total para gas
- Kugelventil Volldurchfluss für Gas mit Flügelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	MOP MOP MOP MOP MOP	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3330 38GI	3/8"	5	6,73	10
3330 12GI	1/2"	5	6,96	10
3330 34GI	3/4"	5	10,10	5
3330 10GI	1"	5	14,33	5
3330 04GI	1"1/4	5	19,23	4

"RIO-GAS" GS GAS RANGE

.01

Full bore gas ball valve, with lever handle, MF connections. Suitable for Gas Family 1-2-3

Nickel plated brass body
 Thick chrome plated brass ball
 Original PTFE seal
 NBR internal OR gaskets
 External OR gasket in FKM (viton)
 Threaded connections ISO 7 (UNI EN 10226)

- Operating temperature -20 ÷ +60°C



- EN 331
 - P.E.D. 97/23/CE



049

- Full bore gas ball valve, with lever handle, MF connections
- Vanne à bille passage intégral pour gaz, avec poignée à levier, raccords MF
- Шаровый полнопроходной кран для газа с ручкой-рычагом, нар.-вн. резьба
- Supapă cu bilă cu trecere totală pentru gaz, cu manetă tip levier, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palanca en acero con revestimiento, paso total para gas
- Kugelventil Volldurchfluss für Gas mit Hebelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	MOP MOP MOP MOP MOP	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3331 38GI	3/8"	5	7,16	10
3331 12GI	1/2"	5	7,25	10
3331 34GI	3/4"	5	10,66	5
3331 10GI	1"	5	14,98	4
3331 04GI	1"1/4	5	20,81	4
3331 02GI	1"1/2	5	31,45	2
3331 20GI	2"	5	45,19	2

Full bore gas ball valve, with butterfly handle, MF connections. Suitable for Gas Family 1-2-3

Nickel plated brass body
 Thick chrome plated brass ball
 Original PTFE seal
 NBR internal OR gaskets
 External OR gasket in FKM (viton)
 Threaded connections ISO 7 (UNI EN 10226)

- Operating temperature -20 ÷ +60°C




- EN 331
 - P.E.D. 97/23/CE



049

- Full bore gas ball valve, with butterfly handle, MF connections
- Vanne à bille passage intégral pour gaz, avec poignée papillon, raccords MF
- Шаровый полнопроходной кран для газа с ручкой-бабочкой, нар.-вн. резьба
- Supapă cu bilă cu trecere totală pentru gaz, cu manetă tip fluture, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palomilla en aluminio, paso total para gas
- Kugelventil Volldurchfluss für Gas mit Flügelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	MOP MOP MOP MOP MOP	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3332 38GI	3/8"	5	7,16	10
3332 12GI	1/2"	5	7,25	10
3332 34GI	3/4"	5	10,66	5
3332 10GI	1"	5	14,98	5
3332 04GI	1"1/4	5	20,81	4

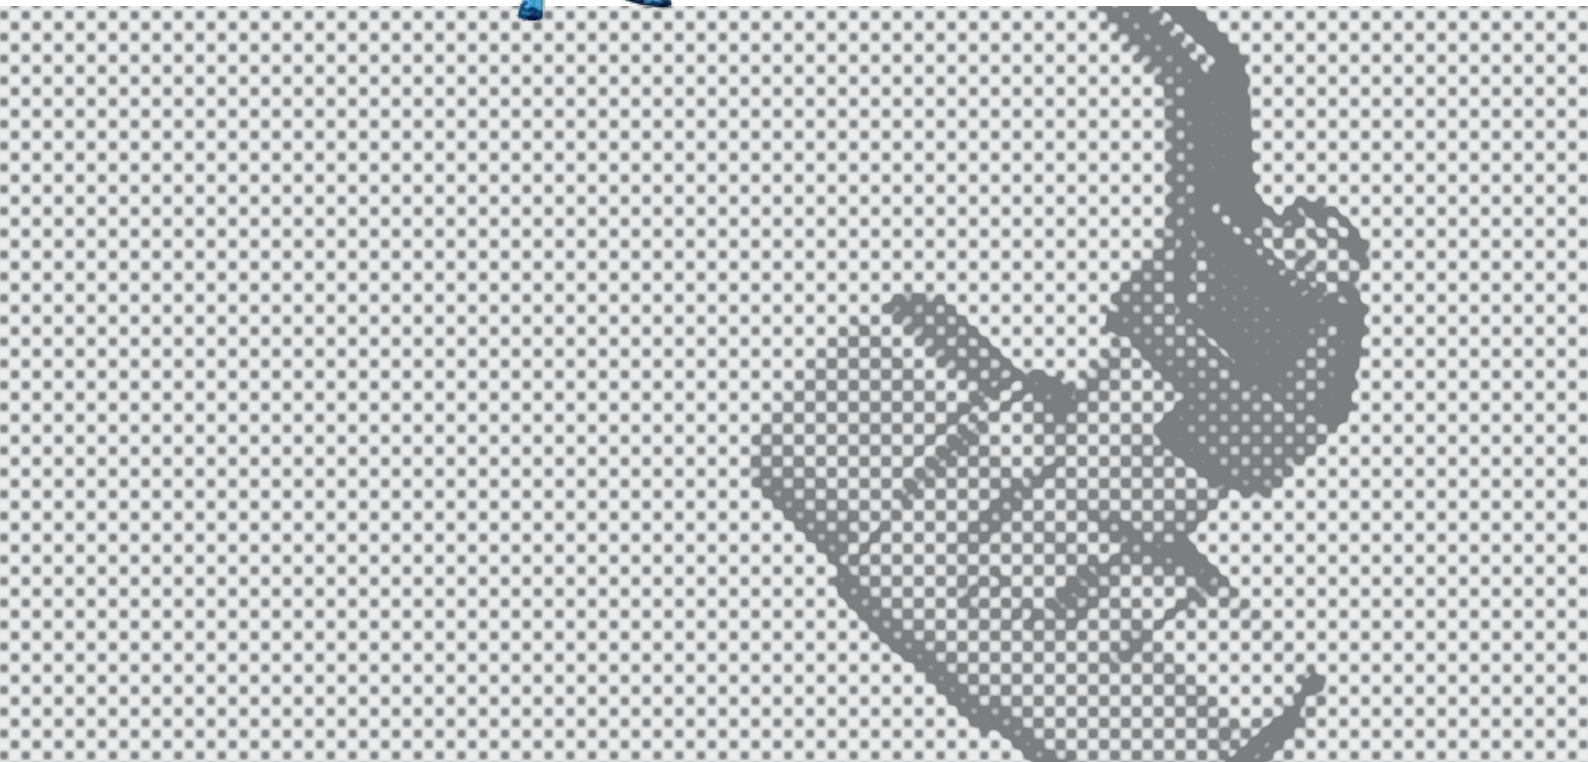



Sferika 



gnutti sebastiano & figli

 **WATER BALL VALVES**

 *VANNES À BILLE EAU*

 *ШАРОВЫЙ КРАН ДЛЯ ВОДЫ*

 *SUPAPE CU BILĂ APĂ*


 *VÁLVULAS DE ESFERA AGUA*

 *KUGELVENTILE FÜR WASSER*

A ■ GS "Arno" heavy full bore range

B ■ RBM "Nilo" full bore range

C ■ RBM "Iro" standard bore range

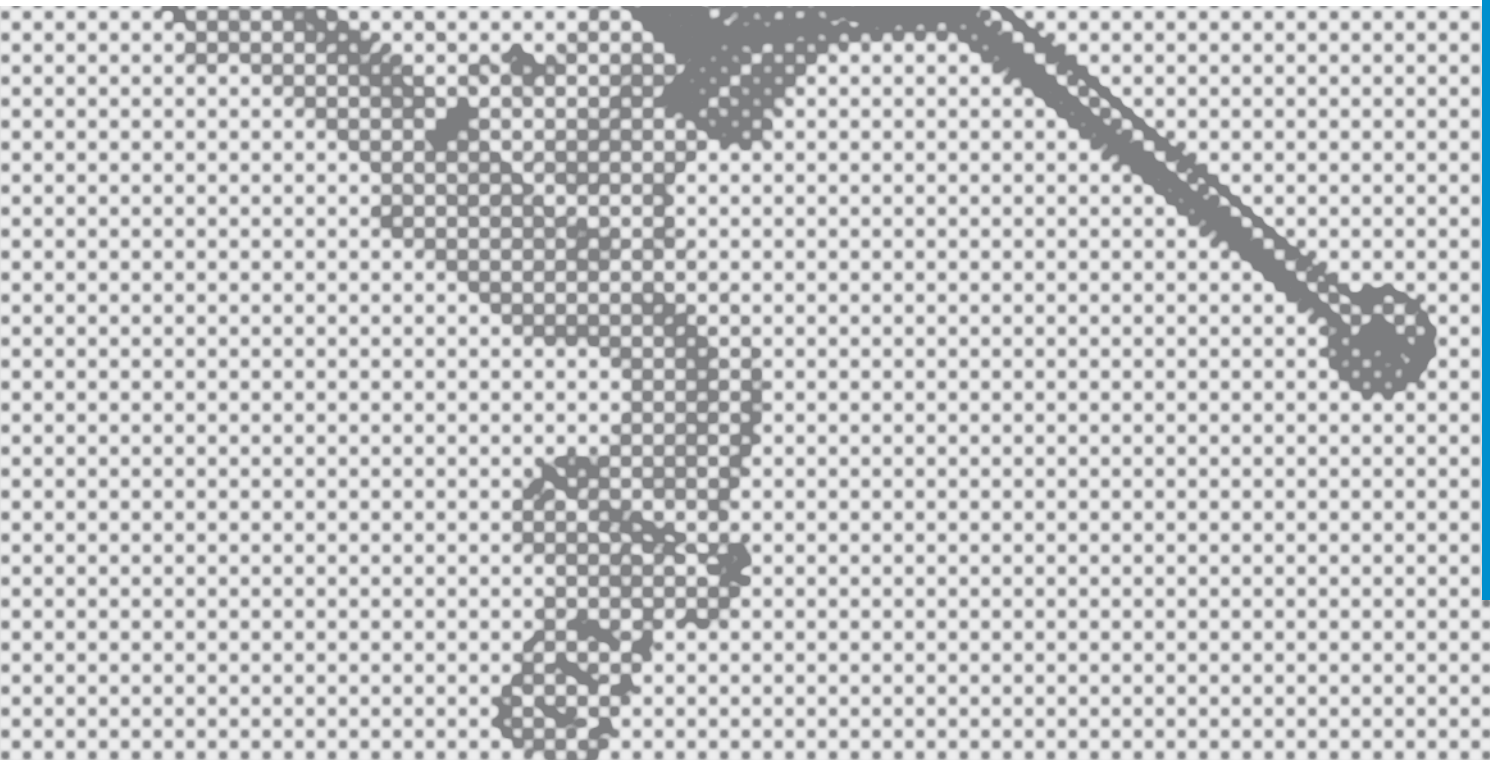

52



A



B



C

Heavy full bore ball valve, lever handle operated, FF connections. Suitable for water, water+ glycol, steam, hydrocarbons.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ 120°C



- Heavy full bore ball valve, lever handle operated, FF connections
- Vanne à bille passage intégral série lourde, actionnement par poignée à levier, raccords FF
- Усиленный полнопроходной шаровый кран с ручкой-рычагом, вн. - вн. резьба
- Supapă cu bilă cu trecere totală debit masiv, cu acționare cu manetă tip levier, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palanca en aluminio, paso total, pesante
- Kugelventil schwerer Volldurchfluss, Betätigung mit Hebelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3371 14NI	1/4"	40	6,26	10
3371 38NI	3/8"	40	8,18	10
3371 12NI	1/2"	40	8,54	8
3371 34NI	3/4"	40	12,70	6
3371 10NI	1"	40	17,00	6
3371 04NI	1"1/4	40	25,78	4
3371 02NI	1"1/2	40	36,52	2
3371 20NI	2"	40	57,53	2
3371 22N	2"1/2	25	120,81	8
3371 30N	3"	25	180,87	6
3371 40N	4"	10	203,95	4

- P.E.D. 97/23/CE
- ACS

047



Heavy full bore ball valve, butterfly handle operated, FF connections. Suitable for water, water+ glycol, steam, hydrocarbons.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Heavy full bore ball valve, butterfly handle operated, FF connections
- Vanne à bille passage intégral série lourde, actionnement par poignée papillon, raccords FF
- Усиленный полнопроходной шаровый кран с ручкой-бабочкой, вн. - вн. резьба
- Supapă cu bilă cu trecere totală debit masiv, cu acționare cu manetă tip fluture, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palomilla en aluminio, paso total, pesante
- Kugelventil schwerer Volldurchfluss, Betätigung mit Flügelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3372 14NI	1/4"	40	6,26	10
3372 38NI	3/8"	40	8,18	10
3372 12NI	1/2"	40	8,54	10
3372 34NI	3/4"	40	12,70	5
3372 10NI	1"	40	17,00	6
3372 04NI	1"1/4	40	25,78	4

- P.E.D. 97/23/CE
- ACS

047



Heavy full bore ball valve, lever handle operated, MF connections. Suitable for water, water+ glycol, steam, hydrocarbons.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO-228

- Operating temperature with water -20 ÷ 120°C



- Heavy full bore ball valve, lever handle operated, MF connections
- Vanne à bille passage intégral série lourde, actionnement par poignée à levier, raccords MF
- Усиленный полнопроходной шаровый кран с ручкой-рычагом, нар. - вн. резьба
- Supapă cu bilă cu trecere totală debit masiv, cu acționare cu manetă tip levier, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palanca en aluminio, paso total, pesante
- Kugelventil schwerer Volldurchfluss, Betätigung mit Hebelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3373 14NI	1/4"	40	6,45	10
3373 38NI	3/8"	40	8,43	10
3373 12NI	1/2"	40	9,03	10
3373 34NI	3/4"	40	12,84	6
3373 10NI	1"	40	17,57	6
3373 04NI	1"1/4	40	26,28	4
3373 02NI	1"1/2	40	37,62	2
3373 20NI	2"	40	59,26	2

- P.E.D. 97/23/CE
- ACS

047



Heavy full bore ball valve, butterfly handle operated, MF connections. Suitable for water, water+ glycol, steam, hydrocarbons.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ 120°C

- ACS



047

- Heavy full bore ball valve, butterfly handle operated, MF connections
- Vanne à bille passage intégral série lourde, actionnement par poignée papillon, raccords MF
- Усиленный полнопроходной шаровый кран с ручкой-бабочкой нар. - вн. резьба
- Supapă cu bilă cu trecere totală debit masiv, cu acționare cu manetă tip fluture, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palomilla en aluminio, paso total, pesante
- Kugelventil schwerer Volldurchfluss, Betätigung mit Flügelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3374 14NI	1/4"	40	6,45	10
3374 38NI	3/8"	40	8,43	10
3374 12NI	1/2"	40	9,03	10
3374 34NI	3/4"	40	12,84	5
3374 10NI	1"	40	17,57	6

Heavy full bore angled ball valve, butterfly handle operated, F connection with M inlet coupling. Suitable for water, water+ glycol, steam, hydrocarbons.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ 120°C

- ACS



047

- Heavy full bore angled ball valve, butterfly handle operated, F connection with M inlet coupling
- Vanne à bille en équerre passage intégral série lourde, actionnement par poignée papillon, raccord F avec manchon M
- Усиленный, полнопроходной, угловой шаровой кран с ручкой-бабочкой, вн. резьба - американка с наружной резьбой
- Supapă cu bilă în echer cu trecere totală debit masiv, cu acționare cu manetă tip fluture, prindere tip Mamă, cu ștuț tip Tată
- Válvula de esfera escuadra macho-hembra con racor 3 piezas, con palomilla en aluminio, paso total, pesante
- Quadratisches Kugelventil schwerer Volldurchfluss, Betätigung mit Flügelgriff, Anschluss F mit M-Stutzen

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3386 09NI	1/2" x 1/2"	40	13,93	10
3386 A1NI	3/4" x 3/4"	40	19,00	5
3386 A2NI	1" x 1"	40	27,57	4

Ball bib-cock, lever handle operated. Suitable for water, water+ glycol, steam, hydrocarbons.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ 120°C

- ACS



047

- Ball bib-cock, with lever handle
- Robinet de distribution coudé à bille, avec poignée à levier
- Шаровый кран с изогнутым сливом и с ручкой-рычагом
- Robinet de distribuție curbat cu bilă, cu manetă de tip levier
- Grifo de jardín con palanca en aluminio, con toma para manguera
- Gekrümmter Kugelhahn mit Hebelgriff

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3255 12NI	1/2"	30	8,81	10
3255 34NI	3/4"	30	11,04	5
3255 10NI	1"	30	18,58	4

Ball bib-cock, butterfly handle operated. Suitable for water, water+ glycol, steam, hydrocarbons.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ 120°C

- ACS



047

- Ball bib-cock, with butterfly handle
- Robinet de distribution coudé à bille, avec poignée papillon
- Шаровый кран с изогнутым сливом и с ручкой-бабочкой
- Robinet de distribuție curbat cu bilă, cu manetă de tip fluture
- Grifo de jardín con palomilla en aluminio, con toma para manguera
- Gekrümmter Kugelhahn mit Flügelgriff

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3256 12NI	1/2"	30	8,81	10
3256 34NI	3/4"	30	11,04	5
3256 10NI	1"	30	18,58	4

Full bore ball valve for thermal insulation systems, lever handle operated, FF connections. Suitable for water, water+ glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ 120°C



- Full bore ball valve for thermal insulation plants, FF connections
- Vanne à bille passage intégral pour installations à isolation thermique, raccords FF
- Усиленный полнопроходной шаровый кран для систем с теплоизоляцией, вн. - вн. резьба
- Supapă cu bilă de trecere totală pentru instalații cu izolare termică, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con volante prolongado, con palanca en aluminio, paso total, pesante
- Kugelventil Volldurchfluss für Anlagen mit Wärmeisolierung, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3348 12NI	1/2"	40	14,97	15
3348 34NI	3/4"	40	17,43	10
3348 10NI	1"	40	24,27	8
3348 04NI	1"1/4	40	36,16	4
3348 02NI	1"1/2	40	45,58	4
3348 20NI	2"	40	66,79	2

047



Arno®

Extension for ball valve art. 3371 - 3373 for thermal insulation systems.

- Extension for ball valve art. 3371 - 3373
- Prolongateur pour vanne à bille réf. 3371 - 3373
- Удлинитель для шарового крана арт. 3371-3373
- Prelungitor pentru supapa cu bilă art. 3371 - 3373
- Prolongador de eje para válvula de esfera GS Arno® cód. 3371 - 3373
- Verlängerung für Kugelventil Art. 3371 - 3373

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3356 14 I	1/4"	-	2
3356 38 I	3/8"	-	2
3356 12 I	1/2"	-	2
3356 34 I	3/4"	-	2
3356 10 I	1"	-	2
3356 04 I	1"1/4	-	2
3356 02 I	1"1/2	-	2
3356 20 I	2"	-	2
3356 22	2"1/2	-	1
3356 30	3"	-	1
3356 40	4"	-	1



056



Suitable for thermal insulation systems

Full bore ball valve, lever handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- ACS



052

- Full bore ball valve, lever handle operated, FF connections
- Vanne à bille passage intégral, actionnement par poignée à levier, raccords FF
- Полнопроходной шаровый кран с ручкой-рычагом, вн. - вн. резьба
- Supapă cu bilă cu trecere totală, cu acționare cu manetă tip levier, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palanca en aluminio, paso total
- Kugelventil Volldurchfluss, Betätigung mit Hebelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1570.03.90	3/8"	50	4,63	20
1570.04.90	1/2"	40	4,36	15
1570.05.90	3/4"	40	7,00	10
1570.06.90	1"	40	12,66	6
1570.07.90	1"1/4	30	15,89	4
1570.08.90	1"1/2	25	26,93	2
1570.09.90	2"	25	40,83	2
1570.10.90	2"1/2	25	135,06	8
1570.11.90	3"	25	195,09	4
1570.13.90	4"	10	270,13	2

RBM "NILO" FULL BORE RANGE



Full bore ball valve, lever handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- ACS



052

- Full bore ball valve, lever handle operated, FF connections
- Vanne à bille passage intégral, actionnement par poignée à levier, raccords FF
- Полнопроходной шаровый кран с ручкой-рычагом, вн. - вн. резьба
- Supapă cu bilă cu trecere totală, cu acționare cu manetă tip levier, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palanca en aluminio, paso total
- Kugelventil Volldurchfluss, Betätigung mit Hebelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1570.03.00	3/8"	50	4,63	15
1570.04.00	1/2"	40	4,36	15
1570.05.00	3/4"	40	7,00	10
1570.06.00	1"	40	12,66	6
1570.07.00	1"1/4	30	15,89	4
1570.08.00	1"1/2	25	26,93	2
1570.09.00	2"	25	40,83	2

Full bore ball valve, butterfly handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- ACS



052

- Full bore ball valve, butterfly handle operated, FF connections
- Vanne à bille passage intégral, actionnement par poignée papillon, raccords FF
- Полнопроходной шаровый кран с ручкой-бабочкой, вн. - вн. резьба
- Supapă cu bilă cu trecere totală, cu acționare cu manetă tip fluture, prinderi Mamă/Mamă
- Válvula de esfera hembra-hembra con palomilla en aluminio, paso total
- Kugelventil Volldurchfluss, Betätigung mit Flügelgriff, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1570.03.70	3/8"	50	4,63	1
1570.04.70	1/2"	40	4,36	20
1570.05.70	3/4"	40	7,00	12
1570.06.70	1"	40	12,66	6
1570.07.70	1"1/4	30	15,89	1



Full bore ball valve, lever handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Full bore ball valve, lever handle operated, MF connections
- Vanne à bille passage intégral, actionnement par poignée à levier, raccords MF
- Полнопроходной шаровый кран с ручкой-бабочкой, вн. - вн. резьба
- Supapă cu bilă cu trecere totală, cu acționare cu manetă tip levier, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palanca en aluminio, paso total
- Kugelventil Volldurchfluss, Betätigung mit Hebelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN PN	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1973.03.90	3/8"	50	5,43	1
1973.04.90	1/2"	40	5,12	15
1973.05.90	3/4"	40	8,03	10
1973.06.90	1"	40	14,22	6
1973.07.90	1"1/4	30	18,23	4
1973.08.90	1"1/2	25	29,11	2
1973.09.90	2"	25	45,78	2

- ACS



052

Full bore ball valve, lever handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Full bore ball valve, lever handle operated, MF connections
- Vanne à bille passage intégral, actionnement par poignée à levier, raccords MF
- Полнопроходной шаровый кран с ручкой-бабочкой, вн. - вн. резьба
- Supapă cu bilă cu trecere totală, cu acționare cu manetă tip levier, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palanca en aluminio, paso total
- Kugelventil Volldurchfluss, Betätigung mit Hebelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN PN	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1973.03.00	3/8"	50	5,43	1
1973.04.00	1/2"	40	5,12	15
1973.05.00	3/4"	40	8,03	10
1973.06.00	1"	40	14,22	6
1973.07.00	1"1/4	30	18,23	4
1973.08.00	1"1/2	25	29,11	2
1973.09.00	2"	25	45,78	2

- ACS



052

Full bore ball valve, butterfly handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Full bore ball valve, butterfly handle operated, MF connections
- Vanne à bille passage intégral, actionnement par poignée papillon, raccords MF
- Полнопроходной шаровый кран с ручкой-бабочкой, нар. - вн. резьба
- Supapă cu bilă cu trecere totală, cu acționare cu manetă de tip fluture, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palomilla en aluminio, paso total
- Kugelventil Volldurchfluss für Gas mit Flügelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN PN	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1973.03.70	3/8"	50	5,43	1
1973.04.70	1/2"	40	5,12	20
1973.05.70	3/4"	40	8,03	12
1973.06.70	1"	40	14,22	6
1973.07.70	1"1/4	30	18,23	4

- ACS



052

Full bore ball valve, butterfly handle operated, F connection with M inlet coupling. Suitable for water, water+ glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ 120°C



- Full bore ball valve, butterfly handle operated, F connection with M inlet coupling
- Vanne à bille passage intégral, actionnement par poignée papillon, raccord F avec manchon M
- Усиленный полнопроходной шаровый кран с ручкой-бабочкой вн. резьба - американка с наружной резьбой
- Supapă cu bilă cu trecere totală debit, cu acționare cu manetă tip fluture, prinderi Mamă, cu ștuț tip Tată
- Válvula de esfera macho-hembra con racor 3 piezas, con palomilla en aluminio, paso total
- Kugelventil schwerer Volldurchfluss, Betätigung mit Flügelgriff, Anschluss F mit M-Stutzen

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3346.04.70	1/2" x 1/2"	40	7,88	1
3346.05.70	3/4" x 3/4"	40	9,89	1
3346.06.70	1" x 1"	40	15,15	1
3346.07.70	1"1/4 x 1"1/4	30	24,24	1

Rbm Nilo®



052

RBM "NILO" FULL BORE RANGE

.05

Full bore ball valve, with water drain valve, lever handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water
-20 ÷ +120°C (ball valve)
-10 ÷ +100°C (water drain valve)
- Nominal pressure (water drain valve): 16 bar



- Full bore ball valve, with water drain valve, lever handle operated, FF connections
- Vanne à boule à passage intégral, avec vanne de vidange de l'eau, actionnement avec poignée à levier, raccords FF
- Шаровой клапан стандартного шага со сливным клапаном воды, управление с рычажным регулятором, крепления FF
- Robinet cu bilă cu pasaj totală, cu supapă de evacuare a apei, acționare cu manetă, racorduri FF
- Válvula esférica de paso total, con válvula de descarga de agua, accionamiento con manija de palanca, racores HH
- Kugelventil Volldurchfluss, mit Wasserablassventil, Betätigung mit Hebelgriff, Anschlüsse Innen-/Innen-Gewinde

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2730.04.00	1/2"	25	8,68	1
2730.05.00	3/4"	25	11,50	1
2730.06.00	1"	25	18,56	1
2730.07.00	1"1/4	20	23,03	1
2730.08.00	1"1/2	20	36,86	1
2730.09.00	2"	20	51,75	1

Rbm Nilo®



052



Ball valve, with water drain valve.

Full bore ball valve, with water drain valve, butterfly handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water
-20 ÷ +120°C (ball valve)
-10 ÷ +100°C (water drain valve)
- Nominal pressure (water drain valve): 16 bar



- Full bore ball valve, with water drain valve, butterfly handle operated, FF connections
- Vanne à boule à passage intégral, avec vanne de vidange de l'eau, actionnement avec poignée papillon, raccords FF
- Шаровой клапан стандартного шага со сливным клапаном воды, управление с дроссельным регулятором, крепления FF
- Robinet cu bilă cu pasaj totală, cu supapă de evacuare a apei, acționare cu mâner fluture, racorduri FF
- Válvula esférica de paso total, con válvula de descarga de agua, accionamiento con manija de mariposa, racores HH
- Kugelventil Volldurchfluss, mit Wasserablassventil, Betätigung mit Flügelgriff, Anschlüsse Innen-/Innen-Gewinde

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2730.04.70	1/2"	25	8,68	1
2730.05.70	3/4"	25	11,50	1
2730.06.70	1"	25	18,56	1
2730.07.70	1"1/4	20	23,03	1

Rbm Nilo®



Ball valve, with water drain valve.

052



Extension for NILO series ball valve for thermal insulation systems.



- Extension for NILO series ball valve
- Prolongateur pour vanne à bille série NILO
- Удлинитель для шаровых кранов NILO
- Prelungitor pentru supapă cu bilă seria NILO
- Prolongador de eje para válvula de esfera NILO®
- Verlängerung für Kugelventil Baureihe NILO

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2340.10.00	3/8"	-	1
2340.15.00	1/2"	-	1
2340.20.00	3/4" - 1" - 1 1/4"	-	1
2340.30.00	1 1/2" - 2"	-	1

056



Suitable for thermal insulation systems

Full bore ball valve, butterfly handle operated, MF connections, with OR seal fitting. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Full bore ball valve, butterfly handle operated, MF connections, with OR seal fitting
- Vanne à bille passage intégral, actionnement par poignée papillon, raccords MF, avec raccord à joint torique
- Полнопроходной шаровый кран с ручкой-бабочкой, нар. - вн. резьба, соединение с уплотнительным кольцом OR
- Supapă cu bilă cu trecere totală, acționare prin manetă de tip fluture, prinderi Tată/Mamă, cu racord cu garnitură OR
- Válvula de esfera macho-hembra con racor 3 piezas con auto-junta, palomilla roja en plástico, paso total
- Kugelventil Volldurchfluss, Betätigung mit Flügelgriff, Anschlüsse MF, mit OR-Dichtungsanschluss

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.05.70	3/4"	25	31,09	2
67.06.70	1"	25	38,47	2

- ACS



052



Fitting with OR seal connection.

Full bore ball valve, butterfly handle operated, MF connections, with OR seal fitting. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Full bore ball valve, butterfly handle operated, MF connections, with OR seal fitting
- Vanne à bille passage intégral, actionnement par poignée papillon, raccords MF, avec raccord à joint torique
- Полнопроходной шаровый кран с ручкой-бабочкой, нар. - вн. резьба, соединение с уплотнительным кольцом OR
- Supapă cu bilă cu trecere totală, cu acționare prin manetă de tip fluture, prinderi Tată/Mamă, cu racord cu garnitură OR
- Válvula de esfera macho-hembra con racor 3 piezas con auto-junta, palomilla azul en plástico, paso total
- Kugelventil Volldurchfluss, Betätigung mit Flügelgriff, Anschlüsse MF, mit OR-Dichtungsanschluss

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.05.00	3/4"	25	31,09	2
67.06.00	1"	25	38,47	2

- ACS



052



Fitting with OR seal connection.

Full bore ball valve, knob operated complete with immersion thermometer with removable rear bulb, MF connections. Suitable for water, water+glycol.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C
- Thermometer scale 0 ÷ +80°C

- ACS



052

- Full bore ball valve, knob operated complete with thermometer, MF connections
- Vanne à bille passage intégral, actionnement par poignée avec thermomètre, raccords MF
- Полнопроходной шаровый кран с термометром, нар. - вн. резьба
- Supapă cu bilă cu trecere totală, acționare prin buton prevăzută cu termometru, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con racor 3 piezas, volante rojo con termómetro, paso total
- Kugelventil Volldurchfluss, Betätigung mit Drehknopf komplett mit Thermometer, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.05.40	3/4"	25	38,27	2
67.06.40	1"	25	46,00	2

Full bore ball valve, knob operated complete with immersion thermometer with removable rear bulb, MF connections. Suitable for water, water+glycol.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C
- Thermometer scale 0 ÷ +80°C

- ACS



052

- Full bore ball valve, knob operated complete with thermometer, MF connections
- Vanne à bille passage intégral, actionnement par poignée avec thermomètre, raccords MF
- Полнопроходной шаровый кран с термометром, нар. - вн. резьба
- Supapă cu bilă cu trecere totală, acționare prin buton prevăzută cu termometru, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con racor 3 piezas, volante rojo con termómetro, paso total
- Kugelventil Volldurchfluss, Betätigung mit Drehknopf komplett mit Thermometer, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.05.10	3/4"	25	38,27	2
67.06.10	1"	25	46,00	2

Full bore ball valve, knob operated complete with immersion thermometer with removable rear bulb, MF connections, with OR seal fitting. Suitable for water, water+glycol.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C
- Thermometer scale 0 ÷ +80°C

- ACS



052

- Full bore ball valve, knob operated complete with thermometer, MF connections with OR seal fitting
- Vanne à bille passage intégral, actionnement par poignée avec thermomètre, raccords MF avec raccord à joint torique
- Полнопроходной шаровый кран с термометром, нар. - вн. резьба, соединение с уплотнительным кольцом OR
- Supapă cu bilă cu trecere totală, acționare prin buton prevăzută cu termometru, prinderi Tată/Mamă cu racor cu garnitură OR
- Válvula de esfera macho-hembra con racor 3 piezas con auto-junta, volante rojo con termómetro, paso total
- Kugelventil Volldurchfluss, Betätigung mit Drehknopf komplett mit Thermometer, Anschlüsse MF mit OR-Dichtungsanschluss

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.06.90	1"	25	52,86	2



Fitting with OR seal connection.

Full bore ball valve, knob operated complete with immersion thermometer with removable rear bulb, MF connections, with OR seal fitting. Suitable for water, water+glycol.



Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C
- Thermometer scale 0 ÷ +80°C

- ACS



052

- Full bore ball valve, knob operated complete with thermometer, MF connections, with OR seal fitting
- Vanne à bille passage intégral, actionnement par poignée avec thermomètre, raccords MF, avec raccord à joint torique
- Полнопроходной шаровый кран с термометром, нар. - вн. резьба, соединение с уплотнительным кольцом OR
- Supapă cu bilă cu trecere totală, acționare prin buton prevăzută cu termometru, prinderi Tată/Mamă, cu racor cu garnitură OR
- Válvula de esfera macho-hembra con racor 3 piezas con auto-junta, volante azul con termómetro, paso total
- Kugelventil Volldurchfluss, Betätigung mit Drehknopf komplett mit Thermometer, Anschlüsse MF mit OR-Dichtungsanschluss

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.06.80	1"	25	52,86	2



Fitting with OR seal connection.

Standard bore ball valve, lever handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, lever handle operated, FF connections
- Vanne à bille passage standard, actionnement par poignée à levier, raccords FF*
- Шаровый кран стандартно-проходной с ручкой-рычагом, вн.-вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip levier, prinderi Mamă/Mamă*
- Válvula de esfera hembra-hembra con palanca en aluminio, paso estándar*
- Kugelventil Standarddurchfluss, Betätigung mit Hebelgriff, Anschlüsse FF*

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
855.03.32*	3/8"	50	4,63	20
854.04.32	1/2"	50	3,37	15
854.05.32	3/4"	50	4,49	12
854.06.32	1"	40	8,08	6
854.07.32	1"1/4	30	11,10	6
854.08.32	1"1/2	25	19,93	2
854.09.32	2"	25	29,46	2

*Full bore

- ACS



053

Standard bore ball valve, lever handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
VITON OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, lever handle operated, FF connections
- Vanne à bille passage standard, actionnement par poignée à levier, raccords FF*
- Шаровый кран стандартно-проходной с ручкой-рычагом, вн.-вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip levier, prinderi Mamă/Mamă*
- Válvula de esfera hembra-hembra con palanca en aluminio, paso estándar*
- Kugelventil Standarddurchfluss, Betätigung mit Hebelgriff, Anschlüsse FF*

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
855.03.42*	3/8"	50	4,63	20
854.04.42	1/2"	50	3,37	15
854.05.42	3/4"	50	4,49	12
854.06.42	1"	40	8,08	6
854.07.42	1"1/4	30	11,10	6
854.08.42	1"1/2	25	19,93	2
854.09.42	2"	25	29,46	2

*Full bore

- ACS



053

Standard bore ball valve, butterfly handle operated, FF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
VITON OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, butterfly handle operated, FF connections
- Vanne à bille passage standard, actionnement par poignée papillon, raccords FF*
- Шаровый кран стандартно-проходной с ручкой-бабочкой, вн.-вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip fluture, prinderi Mamă/Mamă*
- Válvula de esfera hembra-hembra con palomilla en aluminio, paso estándar*
- Kugelventil Volldurchfluss für Gas mit Flügelgriff, Anschlüsse FF*

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
989.03.32*	3/8"	50	4,63	20
989.04.32	1/2"	50	3,37	20
989.05.32	3/4"	50	4,49	12
989.06.32	1"	40	8,08	6
989.07.32	1"1/4	30	11,10	8

*Full bore

- ACS



053

Standard bore ball valve, lever handle operated, MM connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- ACS



053

- Standard bore ball valve, lever handle operated, MM connections
- Vanne à bille passage standard, actionnement par poignée à levier, raccords MM
- Шаровый кран стандартно-проходной с ручкой-рычагом, нар.- нар. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip levier, prinderi Tată/Tată
- Válvula de esfera macho-macho con palanca en aluminio, paso estándar
- Kugelventil Volldurchfluss für Gas mit Hebelgriff, Anschlüsse MM

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
885.03.52*	3/8"	50	5,61	1
885.04.52	1/2"	50	5,39	20
885.05.52	3/4"	50	7,27	12
885.06.52	1"	40	10,61	6

*Full bore

Standard bore ball valve, lever handle operated, MM connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- ACS



053

- Standard bore ball valve, lever handle operated, MM connections
- Vanne à bille passage standard, actionnement par poignée à levier, raccords MM
- Шаровый кран стандартно-проходной с ручкой-рычагом, нар.- нар. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip levier, prinderi Tată/Tată
- Válvula de esfera macho-macho con palanca en aluminio, paso estándar
- Kugelventil Volldurchfluss für Gas mit Hebelgriff, Anschlüsse MM

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
885.03.32*	3/8"	50	5,61	1
885.04.32	1/2"	50	5,39	20
885.05.32	3/4"	50	7,27	12
885.06.32	1"	40	10,61	6

*Full bore

Standard bore ball valve, butterfly handle operated, MM connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- ACS



053

- Standard bore ball valve, butterfly handle operated, MM connections
- Vanne à bille passage standard, actionnement par poignée papillon, raccords MM
- Шаровый кран стандартно-проходной с ручкой-бабочкой, нар.- нар. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip fluture, prinderi Tată/Tată
- Válvula de esfera macho-macho con palomilla en aluminio, paso estándar
- Kugelventil Standarddurchfluss, Betätigung mit Flügelgriff, Anschlüsse MM

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
885.03.42*	3/8"	50	5,61	1
885.04.42	1/2"	50	5,39	20
885.05.42	3/4"	50	7,27	12
885.06.42	1"	40	10,61	6

*Full bore

Standard bore ball valve, lever handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, lever handle operated, MF connections
- Vanne à bille passage standard, actionnement par poignée à levier, raccords MF
- Шаровый кран стандартно-проходной с ручкой-рычагом, нар. - вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip levier, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palanca en aluminio, paso estándar
- Kugelventil Standarddurchfluss, Betätigung mit Hebelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
886.03.32*	3/8"	50	5,43	1
886.04.32	1/2"	50	5,28	20
886.05.32	3/4"	50	6,95	12
886.06.32	1"	40	10,37	6
886.07.32	1"1/4	30	14,89	5
886.08.32	1"1/2	25	23,43	2
886.09.32	2"	25	32,31	2

*Full bore

- ACS



053

Standard bore ball valve, lever handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, lever handle operated, MF connections
- Vanne à bille passage standard, actionnement par poignée à levier, raccords MF
- Шаровый кран стандартно-проходной с ручкой-рычагом, нар. - вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip levier, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palanca en aluminio, paso estándar
- Kugelventil Standarddurchfluss, Betätigung mit Hebelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
886.03.42*	3/8"	50	5,43	1
886.04.42	1/2"	50	5,28	20
886.05.42	3/4"	50	6,95	12
886.06.42	1"	40	10,37	6
886.07.42	1"1/4	30	14,89	6
886.08.42	1"1/2	25	23,43	2
886.09.42	2"	25	32,31	2

*Full bore

- ACS



053

Standard bore ball valve, butterfly handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, butterfly handle operated, MF connections
- Vanne à bille passage standard, actionnement par poignée papillon, raccords MF
- Шаровый кран стандартно-проходной с ручкой-бабочкой, нар. - вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip fluture, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con palomilla en aluminio, paso estándar
- Kugelventil Standarddurchfluss, Betätigung mit Flügelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
887.03.32*	3/8"	50	5,43	1
887.04.32	1/2"	50	5,28	15
887.05.32	3/4"	50	6,95	12
887.06.32	1"	40	10,37	6
887.07.32	1"1/4	30	14,89	1

*Full bore

- ACS



053

Standard bore ball valve, butterfly handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- ACS



053

- Standard bore ball valve, butterfly handle operated, MF connections
- Vanne à bille passage standard, actionnement par poignée papillon, raccords MF
- Шаровый кран стандартно-проходной с ручкой-бабочкой, нар. - вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip future, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con racor 3 piezas, palomilla roja en aluminio, paso estándar
- Kugelventil Standarddurchfluss, Betätigung mit Flügelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.04.02	1/2"	25	6,59	20
67.05.02	3/4"	25	8,94	12
67.06.02	1"	25	13,20	6
67.07.02	1"1/4	25	19,93	4

Standard bore ball valve, butterfly handle operated, MF connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 ÷ +120°C



- ACS



053

- Standard bore ball valve, butterfly handle operated, MF connections
- Vanne à bille passage standard, actionnement par poignée papillon, raccords MF
- Шаровый кран стандартно-проходной с ручкой-бабочкой, нар. - вн. резьба
- Supapă cu bilă cu trecere standard, cu acționare cu manetă tip future, prinderi Tată/Mamă
- Válvula de esfera macho-hembra con racor 3 piezas, palomilla azul en aluminio, paso estándar
- Kugelventil Standarddurchfluss, Betätigung mit Flügelgriff, Anschlüsse MF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
67.04.12	1/2"	25	6,59	20
67.05.12	3/4"	25	8,94	12
67.06.12	1"	25	13,20	6
67.07.12	1"1/4	25	19,93	4

Hydrant box with ball valve with hose connection. Suitable for water.

Brass valve body
Thick chrome plated brass ball
Polypropylene well
PTFE valve seals
Threaded connection UNI-EN-ISO 228
- Operating temperature with water 0 ÷ +80°C



- ACS

- Hydrant box with ball valve with hose connection. Suitable for water
- Puisard pour arrosage avec robinet de fermeture à bille à raccord porte-caoutchouc
- Водяной гидрант в коробе с шаровым краном со штуцером для шланга
- Puț pentru irigare prevăzut cu hidrant de interceptare cu bilă cu prindere suport cauciuc
- Grifo de jardín empotrable en suelo, con caja y tapa, con toma para manguera
- Schacht für Bewässerung komplett mit Kugelabsperrhydrant mit Schlauchanschluss

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	Size Hose connection Dim. Porte-caoutchouc Диаметр шланга Dimens. Suport cauciuc Med. Toma manguera Abm. Schlauchanschluss	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
589.05.00	3/4"x3/4"	ø 15	16	43,56	1
589.06.00	1"x1"	ø 20	16	49,21	1

053

Standard bore ball valve, with built-in check valve, butterfly handle operated, pump connection 1"1/2. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
VITON OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, with built-in check valve, butterfly handle operated, pump connection 1"1/2
- Vanne à boule à passage standard, avec clapet de retenue incorporé, actionnement avec poignée papillon, raccord pompe 1"1/2
- Шаровой клапан стандартного шага с запорным встроенным клапаном, управление с дроссельным регулятором, крепление для насоса 1"1/2
- Robinet cu bilă cu pasaj standard, cu supapă de reținere încorporată, acționare cu mâner fluture, racord pompă 1"1/2
- Válvula esférica de paso estándar, con válvula de retención incorporada, accionamiento con manija de mariposa, racor para bomba 1"1/2
- Kugelventil mit Standarddurchfluss, mit eingebautem Rückschlagventil, Betätigung mit Flügelgriff, Pumpenanschluss 1"1/2

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2544.05.00	3/4" x 1"1/2	50	14,27	1

053



Ball valve + built-in check valve.



Standard bore ball valve, butterfly handle operated, pump connection 1"1/2. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
VITON OR gaskets
Threaded connections UNI-EN-ISO 228

- Operating temperature with water -20 ÷ +120°C



- Valvola a sfera a passaggio standard, azionamento con maniglia a farfalla, attacco pompa 1"1/2
- Vanne à boule à passage standard, actionnement avec poignée papillon, raccord pompe 1"1/2
- Шаровой клапан стандартного шага, управление с дроссельным регулятором, крепление для насоса 1"1/2
- Robinet cu bilă cu pasaj standard, acționare cu mâner fluture, racord pompă 1"1/2
- Válvula esférica de paso estándar, accionamiento con manija de mariposa, racor para bomba 1"1/2
- Kugelventil mit Standarddurchfluss, Betätigung mit Flügelgriff, Pumpenanschluss 1"1/2

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2544.05.10	3/4" x 1"1/2	50	12,45	1

053



Standard bore ball valve, with built-in check valve, butterfly handle operated, pressure connection for copper pipe, pump connection 1"1/2. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
VITON OR gaskets
Threaded connections UNI-EN-ISO 228
Copper pipe end connections

- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, with built-in check valve, butterfly handle operated, pressure connection for copper pipe, pump connection 1"1/2
- Vanne à boule à passage standard, avec clapet de retenue incorporé, actionnement avec poignée papillon, raccord à compression tube en cuivre et raccord pompe 1"1/2
- Шаровой клапан стандартного шага с запорным встроенным клапаном, управление с дроссельным регулятором, крепление с уплотнением для медной трубы и крепление для насоса 1"1/2
- Robinet cu bilă cu pasaj standard, cu supapă de reținere incorporată, acționare cu mâner fluture, racord cu compresie a tubului din cupru și racord pompă 1"1/2
- Válvula esférica de paso estándar, con válvula de retención incorporada, accionamiento con manija de mariposa, racor de compresión para tubo de cobre y racor para bomba 1"1/2
- Kugelventil mit Standarddurchfluss, mit eingebautem Rückschlagventil, Betätigung mit Flügelgriff, Klemmanschluss für Kupferrohr und Pumpenanschluss 1"1/2

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2544.22.00	22 mm x 1"1/2	50	17,25	1

053



Ball valve + built-in check valve.



Standard bore ball valve, butterfly handle operated, pressure connection for copper pipe, pump connection 1"1/2. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
VITON OR gaskets
Threaded connections UNI-EN-ISO 228
Copper pipe end connections

- Operating temperature with water -20 ÷ +120°C

- Standard bore ball valve, butterfly handle operated, pressure connection for copper pipe, pump connection 1"1/2
- Vanne à boule à passage standard, actionnement avec poignée papillon, raccord à compression tube en cuivre et raccord pompe 1"1/2
- Шаровой клапан стандартного шага, управление с дроссельным регулятором, крепление с уплотнением для медной трубы и крепление для насоса 1"1/2
- Robinet cu bilă cu pasaj standard, acționare cu mâner fluture, racord cu compresie a tubului din cupru și racord pompă 1"1/2
- Válvula esférica de paso estándar, accionamiento con manija de mariposa, racor de compresión para tubo de cobre y racor para bomba 1"1/2
- Kugelventil mit Standarddurchfluss, Betätigung mit Flügelgriff, Klemmanschluss für Kupferrohr und Pumpenanschluss 1"1/2

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2544.22.10	22 mm x 1"1/2	50	15,43	1



053



Standard bore ball valve, lever handle operated, copper pipe end connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
copper pipe end connections

- Operating temperature with water -20 ÷ +120°C



- Standard bore ball valve, lever handle operated, copper pipe end connections
- Vanne à bille à passage standard, réglage avec poignée levier, raccord à compression pour tube cuivre
- Шаровый кран стандартно-проходной с ручкой-рычагом, обжимное соединение для медных труб
- Robinet cu bila pasaj standard, actionare cu maneta, racorzi pentru teava de cupru
- Válvula de esfera con adaptadores para tubo de cobre y con palanca en aluminio, paso standar
- Kugelhahn, standard Durchfluss, mit Handgriff, Pressfitting für Kupferrohr

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2093.15.20	15 mm	50	5,93	15
2093.22.20	22 mm	50	8,00	10
2093.28.20	28 mm	40	14,30	6
2093.35.20	35 mm	30	26,89	4
2093.42.20	42 mm	25	39,03	2
2093.54.20	54 mm	25	63,35	1

053



Standard bore ball valve, lever handle operated, copper pipe end connections. Suitable for water, water+glycol.

Nickel plated brass body
Thick chrome plated brass ball
PTFE seal
EPDM OR gaskets
copper pipe end connections

- erating temperature with water -20 ÷ +120°C



- Standard bore ball valve, butterfly handle operated, copper pipe end connections
- Vanne à bille à passage standard, réglage avec poignée papillon, raccord à compression pour tube cuivre
- Шаровый кран стандартно-проходной с ручкой-бабочкой, обжимное соединение для медных труб
- Robinet cu bila pasaj standard, actionare cu maneta fluture, racorzi pentru teava de cupru
- Válvula de esfera con adaptadores para tubo de cobre y con palomilla en aluminio, paso standar
- Kugelhahn, standard Durchfluss, mit Flügelgriff, Pressfitting für Kupferrohr

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2093.15.00	15 mm	50	5,93	20
2093.22.00	22 mm	50	8,00	12
2093.28.00	28 mm	40	14,30	6
2093.35.00	35 mm	30	26,89	4

053



Extension for IRO series ball valve for thermal insulation systems.



- Extension for IRO series ball valve
- Prolongateur pour vanne à bille série IRO
- Удлинитель для шаровых кранов IRO
- Prelungitor pentru supapă cu bilă seria IRO
- Prolongador de eje para válvula de esfera IRO®
- Verlängerung für Kugelventil Baureihe IRO

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2340.10.00	3/8"	-	1
2340.15.00	1/2" - 3/4"	-	1
2340.20.00	1" - 1 1/4"	-	1
2340.30.00	1 1/2" - 2"	-	1

056



Suitable for thermal insulation systems



Sferika 



gnutti sebastiano & figli

 CHECK VALVES


 CLAPETS ANTI-RETOUR


 ОБРАТНЫЕ КЛАПАНЫ

 SUPAPE DE REȚINERE

 VÁLVULAS ANTIRETORNO

 RÜCKSCHLAGVENTILE

A  Check valves

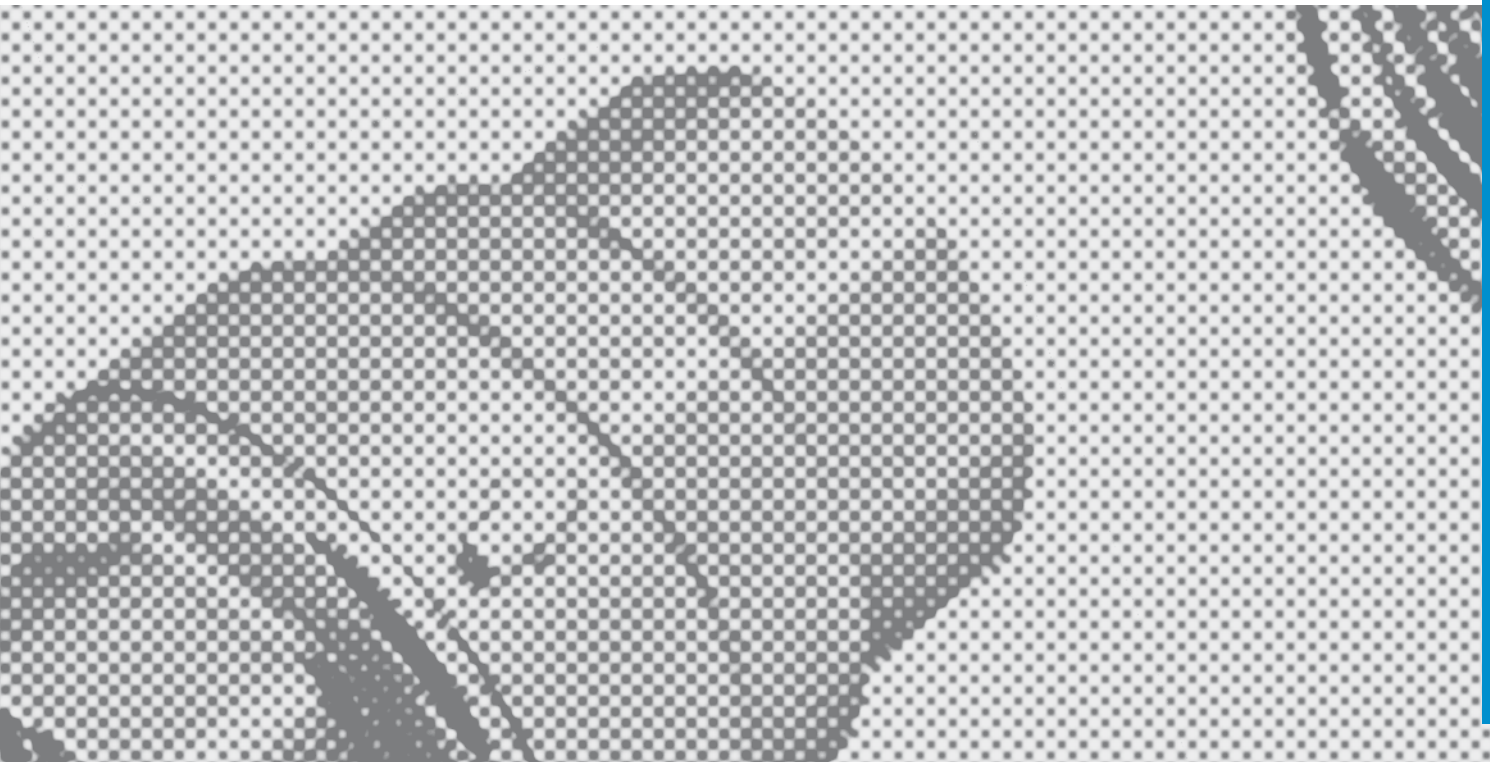

A



Check valve, FF connections. Suitable for water.

Brass body
Nitrile OR gaskets
Threaded connections UNI-EN-ISO 228
- Operating temperature with water -20 + 90°C

- Check valve, FF connections
- Clapet anti-retour, raccords FF
- Обратный клапан, вн.- вн. резьба
- Supapă de rețineră, prinderi Mamă/Mamă
- Válvula antiretorno a disco, hembra-hembra
- Rückschlagventil, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3085 38I	3/8"	16	8,37	10
3085 12I	1/2"	16	8,37	10
3085 34I	3/4"	16	11,00	10
3085 10I	1"	16	16,36	5
3085 04I	1"1/4	16	23,04	4
3085 02I	1"1/2	16	29,32	4
3085 20I	2"	16	43,19	2
3082 22	2"1/2	6	64,64	2
3082 30	3"	6	86,17	2
3082 40	4"	6	123,87	6

050



Ball valve with built-in check valve, FF connections. Suitable for water.

Nickel plated brass body
VITON gaskets
Threaded connections FF UNI-EN-ISO 228
- Max operating pressure 90°C (Water)

- Ball valve with built-in check valve, FF connections
- Vanne à bille à anti-retour intégré, raccords FF
- Шаровый кран со встроенным обратным клапаном, вн.- вн. резьба
- Supapă cu bilă cu rețineră încorporată, prinderi Mamă/Mamă
- Válvula de esfera con antiretorno, palomilla en aluminio
- Kugelventil mit eingebautem Rückschlag, Anschlüsse FF



Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1925.04.00	1/2"	25	14,39	20
1925.05.00	3/4"	25	19,70	12
1925.06.00	1"	25	31,49	6
1925.07.00	1"1/4	25	50,28	1
1925.08.00*	1"1/2	25	68,54	2
1925.09.00*	2"	25	106,01	1

*black lever

- ACS

054



Ball valve + built-in check valve.

Check valve, FF connections. Suitable for water.

Brass body
Gaskets in EPDM + PEROX
Stainless steel AISI 302 springs
Threaded connections FF UNI-EN-ISO 228
- Min. opening pressure 4 KPa
- Max operating pressure 90 °C (Water)
- Max operating pressure 110 °C (Air)

- Check valve, FF connections, brass rod
- Clapet anti-retour, raccords FF, tige en laiton
- Обратный клапан с латунным штоком, вн.- вн. резьба
- Supapă de rețineră, prinderi Mamă/Mamă, tija din alamă
- Válvula antiretorno a disco, hembra-hembra con eje en latón
- Rückschlagventil, Anschlüsse FF, Schaft aus Messing



Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
860.04.02	1/2"	25	4,85	30
860.05.02	3/4"	25	6,35	16
860.06.02	1"	25	8,56	10
860.07.02	1"1/4	16	13,47	8
860.08.02	1"1/2	16	17,50	4
860.09.02	2"	16	26,93	2

- Check valve, FF connections, plastic rod
- Clapet anti-retour, raccords FF, tige en plastique
- Обратный клапан с пластиковым штоком, вн.- вн. резьба
- Supapă de rețineră, prinderi Mamă/Mamă, tija din plastic
- Válvula antiretorno a disco, hembra-hembra con eje en plástico
- Rückschlagventil, Anschlüsse FF, Schaft aus Kunststoff

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN	EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
860.04.12	1/2"	25	4,85	30
860.05.12	3/4"	25	6,35	16
860.06.12	1"	25	8,56	10
860.07.12	1"1/4	16	13,47	8
860.08.12	1"1/2	16	17,50	4
860.09.12	2"	16	26,93	2

- ACS

054



**Check valve, MM connections.
Suitable for water.**

Brass body
Gaskets in EPDM + PEROX
Stainless steel AISI 302 springs
Threaded connections MM UNI-EN-ISO 228

- Min. opening pressure 4 KPa
- Max operating pressure 90 °C (Water)
- Max operating pressure 110 °C (Air)



- Check valve, MM connections, plastic rod
- Clapet anti-retour, raccords MM, tige en plastique
- Обратный клапан с пластиковым штоком, нар. - нар. резьба
- Supară de reținere, prinderi Tată/Tată, tija din plastic
- Válvula antiretorno a disco, macho-macho con eje en plástico
- Rückschlagventil, Anschlüsse MM, Schaft aus Kunststoff

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN PN	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
1851.04.10	1/2"	25	6,14	30
1851.05.10	3/4"	25	8,26	16
1851.06.10	1"	25	10,18	10

- ACS



054

**Mini-check valve, FF connections.
Suitable for water.**

Brass body
Polymer poppet valve
NBR seal
Stainless steel spring
Threaded connections FF UNI-EN-ISO 228

- Max operating pressure 90 °C (Water)
- Max operating pressure 110 °C (Air)



- Mini-check valve, FF connections
- Mini clapet anti-retour, raccords FF
- Обратный клапан "Мини", вн. - вн. резьба
- Mini-supară de reținere, prinderi Mamă/Mamă
- Mini-válvula antiretorno a disco, hembra-hembra
- Kleinrückschlagventil, Anschlüsse FF

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	PN PN PN PN PN PN	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
2190.04.00	1/2"	25	3,84	10
2190.05.00	3/4"	25	4,80	10
2190.06.00	1"	25	5,98	10



Compact.

054

**Filter with threaded fitting.
Coupled with the check valves it
forms a valid protection for the
pumps.**

Stainless steel AISI 304L filter

Nylon 6.6 threaded fitting

- Max operating pressure 90 °C



- Stainless steel filter for check valves
- Filtre en inox pour clapets anti-retour
- Фильтр из нержавеющей стали для обратного клапана
- Filtru de oțel inox pentru supape de reținere
- Filtro en acero inox. para válvula antiretorno
- Edelstahlfilter für Rückschlagventile

Code Code Артикул Cod Código Code	Size Taille Размер Dimensiunea Medida Abmessung	EURO EURO EURO EURO EURO EURO	Pack Cond. Уп-ка Ambalaj Caja Verp.
3086 381	3/8"	1,83	10
3086 121	1/2"	1,83	10
3086 341	3/4"	1,97	10
3086 101	1"	2,49	10
3086 041	1"1/4	3,01	8
3086 021	1"1/2	3,67	8
3086 201	2"	4,19	4
3086 22	2"1/2	7,59	3
3086 30	3"	8,78	2
3086 40	4"	11,39	8

050